



FiberRunner™ LSZH 6x4 Routing System

specifications

The 6x4 routing system shall be a system of channel, fittings, and brackets designed to segregate, route, and protect fiber optic and high performance copper cabling. Channel and fittings shall be assembled using pre-assembled couplers. A selection of spillout options shall be available that easily attach using the vertical tee. Fittings maintain a minimum 2" bend radius to protect against signal loss due to excessive cable bends. Available system colours shall be yellow and black. A full complement of brackets shall be available for attaching system components to ladder rack, threaded rod, auxiliary framing, strut, equipment racks and raised floor pedestals.

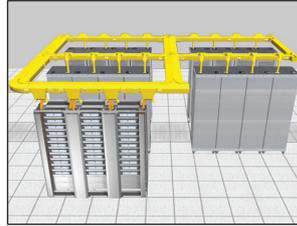

technical information

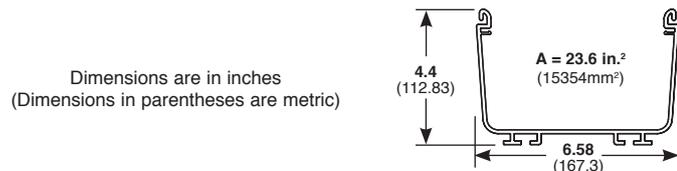

Open channel 50% fill capacity: (4" pile up)	Cable	No. of Cables
	1.6mm	3,819
	2.0mm	2,444
	3.0mm	1,086
Fiber Optic Ribbon		
Interconnect	5.20mm	361
Category 6	6.35mm	242
Category 6A	7.57mm	171
Material:	LSZH PC(Channel), LSZH PC/ABS (Fittings)	
Flammability:	94V-0	
Approvals:	UL Listed to 2024 Optical Fiber Cable Routing Assemblies	
CSI Spec Form:	LP-CSISPEC-FR	

key features and benefits

Fastest installations	No bolts need to be tightened and no tools are required when installing the QuikLock™ Coupler; QuikLock™ Couplers and Brackets take less than five seconds to make a mechanically secure connection
Easy to maintain	Hinged channel cover installs easily and fully encloses the channel for cable protection; split hinged channel cover creates radiused 3/4" (19mm) opening for easy access to add or remove cables; the 6x4 hinged and split hinged channel covers will stay open between 30° and 90° to allow cable access even in height restricted areas Split fitting covers allow cable to be laid in without removing the fitting cover; the covers are also designed to prevent cables from coming out of the channel as cable is pulled through
System strength	Hinged channel covers and split fitting covers protect cabling and provide fast and easy access for future cabling moves, adds, and changes Robust system of channel, covers, fittings, and other non-metallic system components, protect cable from physical damage; system includes full range of directional and spillout fittings
Versatility	Multiple spillout options include spill-over fittings and the vertical tee which accepts a 3-sided trumpet, transition to corrugated tubing and Panduit™ FiberRunner™ System
Cable protection	A minimum 2" bend radius maintained throughout all fittings prevents excessive bends in fiber optic cabling

applications

The FiberRunner™ 6x4 Routing System is a system of channel, fittings, and brackets designed to segregate, route, and protect fiber optic and high performance copper cabling. It is suited for data center applications where cable is routed from distribution areas to equipment cabinets or racks. It is used in Telco Central Offices to route fiber optic jumper cables between fiber distribution frames and equipment bays. It can be deployed over the racks or in approved underfloor applications. Channel and fittings are assembled using timesaving Panduit™ QuikLock™ Couplers. A selection of spillout options is available that easily attach using the vertical tee.

Fittings maintain a 2" bend radius to protect against signal loss due to excessive cable bends. Available system colours are yellow and black to differentiate various types of cabling. A full complement of QuikLock™ Brackets is available to attach system components to support structures found in all applications. The FiberRunner™ 6x4 Routing System is part of the Panduit™ complete fiber distribution system, which includes the FiberRunner™ 24x4, 12x4, 4x4, and 2x2 Routing Systems, Wyr-Grid™ Overhead Cable Tray System, cable management, and racks.

Channel and Cover	
6x4 channel (2 Meter):	FR6X4L**2
6x4 hinged cover (2 Meter):	FRHC6L**2
6x4 split hinged cover (2 Meter):	FRSHC6L**2
Cable retainer:	FRCR6LBL-X
Fittings, Split Covers, and Spillouts	
QuikLock™ Coupler:	FRBC6X4L**
Horizontal right angle:	FRRA6X4L**
Horizontal right angle cover:	FRASC6L**
Horizontal 45°:	FRH456X4L**
Horizontal 45° cover:	FRH45SC6L**
Horizontal tee:	FRT6X4L**
Horizontal tee cover:	FRTSC6L**
4-way cross:	FRFWC6X4L**
4-way cross cover:	FRFWCSC6L**
End cap:	FREC6X4L**
Inside vertical 90°:	FRIVRA6X4L**
Inside vertical 45°:	FRIV456X4L**
Outside vertical 45°:	FROV456X4L**
Outside vertical 45° cover:	FROV45SC6L**
Outside vertical 90°:	FROVRA6X4L**
Outside vertical 90° cover:	FROVRASC6L**
6x4 to 4x4 FiberRunner™ Reducer Fitting:	FRRF6FR4L**
6x4 to 4x4 FiberRunner™ Reducer Fitting Cover:	FRRF6FR4SCL**
6x4 FiberRunner™ System to 4x4 Fiber-Duct™ Reducer Fitting:	FRRF64L**
Adapter to CommScope	
6x4 FiberGuide™:	FRADC6X4L**
Adapter to Tyton 8x4 Lightguide™:	FRTYT68
Adapter to Warren & Brown 8x4 Lightpaths™:	FRWBS68
QuikLock™ Vertical Tee:	FRVT6X4L**
3-sided vertical tee trumpet spillout:	FTR4X4L**
2-port spillout to 1.5" I.D. corrugated tubing:	FIDT4X4LBL
4x4 hinged duct vertical cable manager kit:	FRHD4KT**
Low profile reducer 4x4 to 2x2 for vertical tee:	FRLPR42LBL
Spill-over with 2x2 exit:	FRSPJ2X2L**
Spill-over cover with 2x2 exit for 6x4 system:	FRSPJC26L**
2x2 3-sided trumpet:	FTR2X2L**
Dual downspout:	FRDSD6X4L**
Dual downspout cover:	FRDSDSC6L**
4x4 3-sided trumpet:	FRTR4X4L**
2-port spillout to 1.5" I.D. corrugated tubing:	FRIDT4X4L**
1-port spillout to 1.5" I.D. corrugated tubing:	FR1.5IDEL**
3-sided BRC trumpet spillout for 6x4 exit:	FRTR6X4L**
6x4 up spout:	FRUPS6X4L**
Innerduct transition fitting:	FITF6X4
Corrugated tubing spillout:	FRIDT6X4L**
QuikLock™ Mounting Brackets:	
QL existing 1/2" thr rod bracket:	FR6TRBE12
QL existing 5/8" thr rod bracket:	FR6TRBE58
QL new 1/2" thr rod bracket:	FR6TRBN12
QL new 5/8" thr rod bracket:	FR6TRBN58
QL underfloor bracket:	FR6USB
QL adjust ladder rack bracket:	FR6ALB
QL center support bracket 1/2":	FR6CS12
QL center support bracket 5/8":	FR6CS58
QL adjust C-bracket 1/2":	FR6ACB12
QL adjust C-bracket 5/8":	FR6ACB58
QL trapeze 3/8" bracket:	FR6TB38
QL trapeze 1/2" bracket:	FR6TB12
Two-piece ladder rack bracket 1/2" thr rod:	F2PCLB12
Two-piece ladder rack bracket 5/8" thr rod:	F2PCLB58
QL ladder rack bracket:	FR6LRB
QL "L" wall mount bracket:	FR6LB
QL NetFrame™ Rack Mount Bracket:	FRRMBNF58
QL adjust cabinet mount bracket:	FR6ACAB
Two-piece framing clip 5/8" thr rod to 3/16" C-channel aux. framing bars:	FR AFC58
4 post rack bracket:	FR4PRB58

*FiberGuide is a registered trademark of CommScope

² Lightguide Fiber Optic Protection System is a product of the Hellerman Tyton Corporation.

³ Lightpaths is a trademark of Warren & Brown Technologies Pty Ltd.


FiberRunner™ 6x4 Routing System EMEA

channel and cover




FR6X4L**2 FRHC6L**2 FRSHC6L**2

fittings, split covers, and spillouts

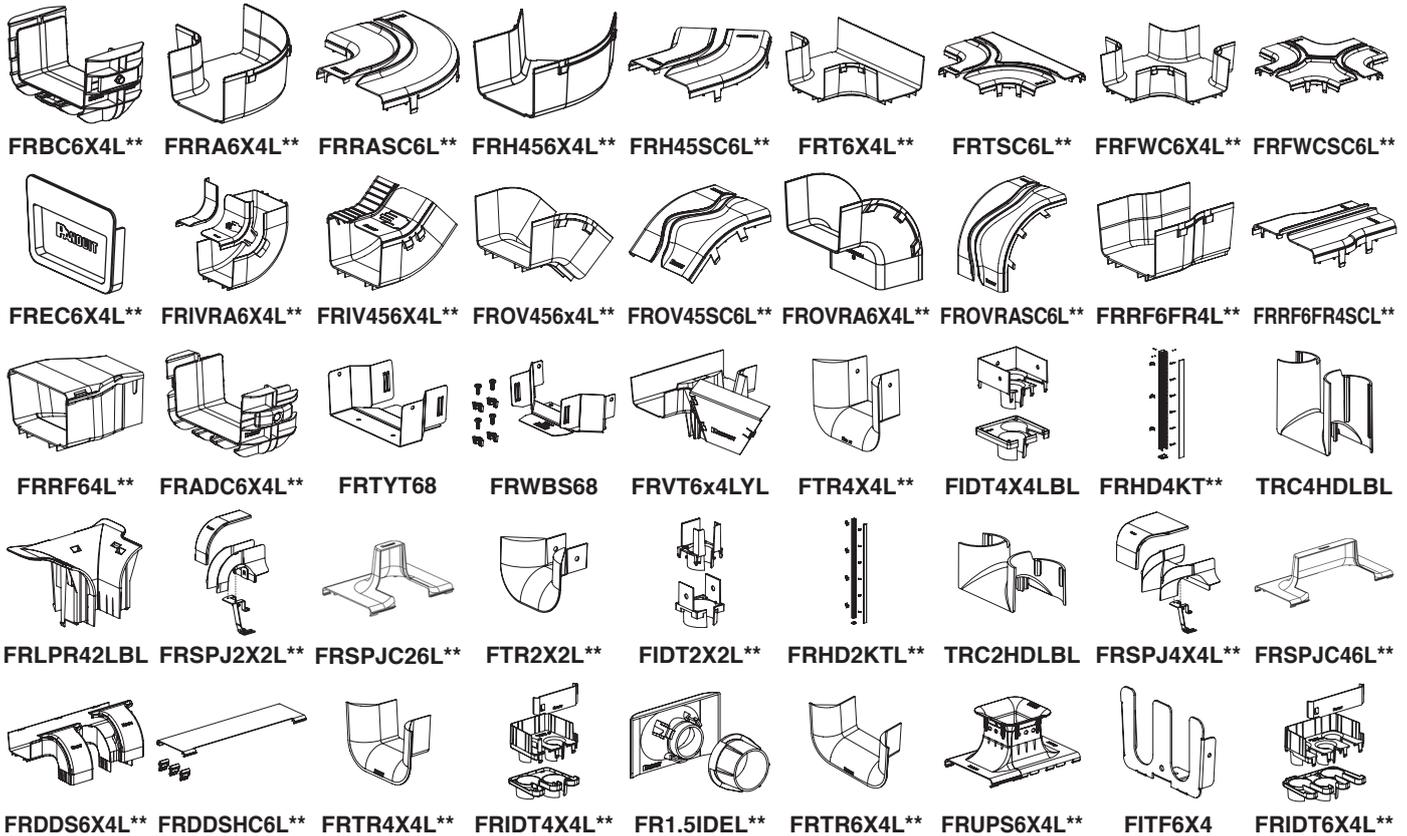

FRBC6X4L** FRRA6X4L** FRRASC6L** FRH456X4L** FRH45SC6L** FRT6X4L** FRTSC6L** FRFWC6X4L** FRFWCSC6L**
 FREC6X4L** FRIVRA6X4L** FRIV456X4L** FROV456x4L** FROV45SC6L** FROVRA6X4L** FROVRASC6L** FRRF6FR4L** FRRF6FR4SCL**
 FRRF64L** FRADC6X4L** FRTYT68 FRWBS68 FRVT6x4LYL FTR4X4L** FIDT4X4LBL FRHD4KT** TRC4HDLBL
 FRLPR42LBL FRSPJ2X2L** FRSPJC26L** FTR2X2L** FIDT2X2L** FRHD2KTL** TRC2HDLBL FRSPJ4X4L** FRSPJC46L**
 FRDDS6X4L** FRDDSHC6L** FRTR4X4L** FRIDT4X4L** FR1.5IDEL** FRTR6X4L** FRUPS6X4L** FITF6X4 FRIDT6X4L**

QuikLock™ Mounting Brackets

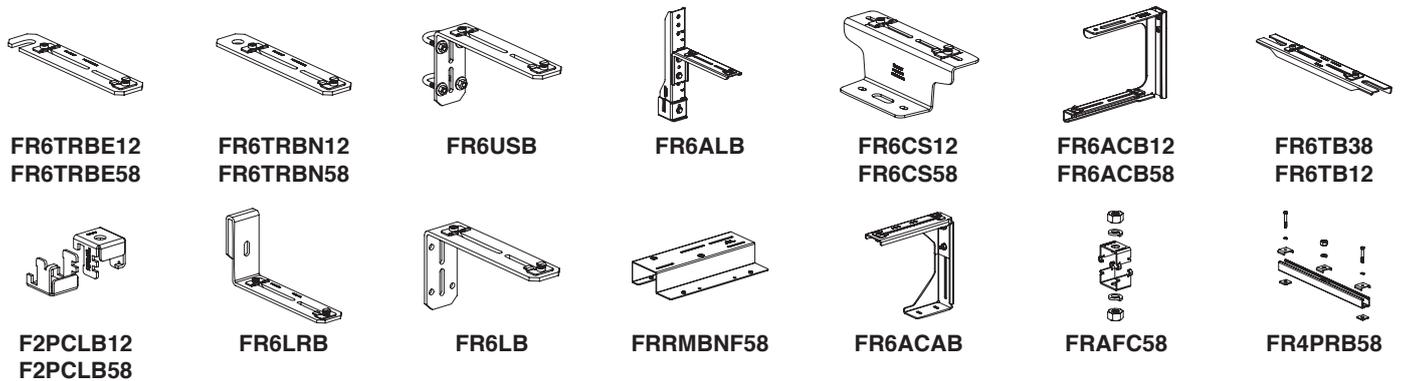

FR6TRBE12 FR6TRBN12 FR6USB FR6ALB FR6CS12 FR6ACB12 FR6TB38
 FR6TRBE58 FR6TRBN58 FR6ACB58 FR6TB12
 F2PCLB12 FR6LRB FR6LB FRRMBNF58 FR6ACAB FRAFC58 FR4PRB58
 F2PCLB58

**Substitute: YL= Yellow, BL= Black

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty



For more information
 Visit us at www.panduit.com
 Contact Customer Service by email: cs@panduit.com
 or by phone: 800.777.3300

©2020 Panduit Corp.
 ALL RIGHTS RESERVED.
 FRSP25--WW-UKE
 9/2020