# **Category 5e Shielded Modular Plug**



### specifications

Category 5e/Class D, 8-position, 8-wire, shielded modular plug shall terminate most 4-pair, 24-26 AWG, 100 Ohm, solid or stranded, unshielded twisted pair cable with maximum conductor insulation diameter of 0.040 in. (1.02mm). Simplified termination method shall require no load bar. Guide ramp shall facilitate easy conductor insertion and termination. Modular plug shall terminate to T568A and T568B wiring schemes.



Category 5e Shielded Modular Plug

**100/pack:** MPS588-C

Tools and Accessories

Crimp tool:MPT5-8ASWire prep tool:WPT-8Wire snip tool:CWST


### technical information


IEC compliance:	IEC 60603-7
RoHS compliance:	Compliant
UL listed:	UL 1863
CSA listed:	CSA Standard C22.2
Conductor termination:	Compatible with most 24-26 AWG solid or stranded cable with conductor insulation diameters between 0.035 to 0.040 in.
Operating temperature:	14°F to 140°F (-10°C to 60°C)
Storage temperature:	-40°F to 158°F (-40°C to 70°C)
Plug Housing:	UL94V-0 rated clear Polycarbonate
Contacts:	Gold plated phosphor bronze

# key features and benefits

Patented tangle-free latch	Prevents snags and provides easy release, saving time and tangle-free latch providing reliability on frequent moves, adds, and changes
Robust construction	Rated to 2500 mating cycles

## engineer drawing



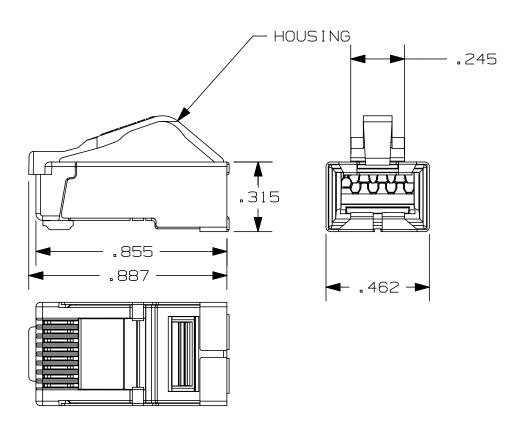

Dimensions are in inches.

#### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK Phone: 44.20.8601.7200 PANDUIT SINGAPORE PTE. LTD. Republic of Singapore Phone: 65.6305.7575 PANDUIT JAPAN Tokyo, Japan Phone: 81.3.6863.6000 PANDUIT LATIN AMERICA Guadalajara, Mexico Phone: 52.33.3777.6000 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

