

# PanZone® Category 6A Shielded Cable Assemblies

## specifications

Zone cabling assemblies shall be constructed of Category 6A 23 AWG, solid, shielded, F/UTP, twisted pair cable and available in plug-to-plug or jack-to-plug termination configurations. Cable assemblies shall be available in Low Smoke Zero Halogen (LSZH), Plenum or Riser flammability ratings and shall be wired according to T568B guidelines. A variety of lengths shall be available for design flexibility.



## technical information

<b>Category 6A/Class E<sub>A</sub> channel and permanent link performance:</b>	Exceeds all ANSI/TIA-568.2-D Category 6A and ISO 11801 Class E <sub>A</sub> channel and permanent link standards requirement
<b>FCC and ANSI compliance:</b>	Meets ANSI/TIA-1096-A requirements; contacts plated with 50 micro inches of gold for superior performance
<b>IEC compliance:</b>	Meets IEC 60603-7; IEC 60754-1
<b>PoE compliance:</b>	Meets IEEE 802.3af IEEE 802.3bt and IEEE 802.3at for PoE applications
<b>C(UL)US listed:</b>	UL 1863, CSA Standard C22.2
<b>RoHS compliance:</b>	Compliant
<b>Operating temperature:</b>	14°F to 140°F (-10°C to 60°C)
<b>Installation temperature:</b>	-40°F to 158°F (-40°C to 70°C)
<b>Cable diameter:</b>	0.290 in. (7.4mm) nominal
<b>Flammability rating:</b>	Low Smoke Zero Halogen (LSZH), Plenum or Riser

## key features and benefits

<b>100% performance tested</b>	Confidence that each cable assembly delivers Category 6A permanent link performance
<b>Robust construction</b>	Rated to 2500 mating cycles
<b>Identification</b>	Provides identification of performance level, length, and quality control number for future traceability
<b>Patented tangle-free latch on modular plugs</b>	Prevents snags and provides easy release, saving time and providing reliability on frequent moves, adds, and changes
<b>Variety of lengths</b>	Meets individual length requirements for greater system flexibility
<b>Color bands (optional)</b>	Snap onto cable, allowing additional color coding options
<b>RJ45 plug lock-in device (optional)</b>	Secures plug into jack to prevent unauthorized removal of patch cord

## applications

Zone cabling products are designed to provide an efficient and cost effective way to design and deploy cabling systems in data centers and open office architecture environments. Each zone cabling product serves as a main distribution point for a particular zone, increasing network flexibility, manageability, accessibility and efficiency. Utilizing a distributed network and a zone cabling topology for physical infrastructure can reduce telecommunication congestion. Zone cabling products accommodate multimedia solutions and can be used in floor, ceiling and all mount applications, which provide a complete end-to-end network solution. Zone cabling topology provides a scalable physical network infrastructure that meets the needs of today as well as the flexibility to deploy technology of tomorrow.

### PanZone® Category 6A Shielded Cable Assemblies

#### Plug-to-Plug

<b>LSZH:</b>	SAPLWH25M*
<b>Riser:</b>	SAPRBU100


\*For lengths 10 to 100 feet (five foot increments) and 110, 120, 130, 140, or 150 feet, change the length designation in the part number to the desired length. For example, the part number for a 100 foot, jack-to-plug, Category 6A, shielded, blue, plenum cable assembly is SAAPPBU100.

Contact your Panduit representative.



PanZone Category 6A Shielded Cable Assemblies are pre-labeled with the *RapidID™* Network Mapping System to enable faster tracing, placing, and network documentation. Learn more: [www.panduit.com/rapid-id](http://www.panduit.com/rapid-id)

## Component Drawing of Patch Cords

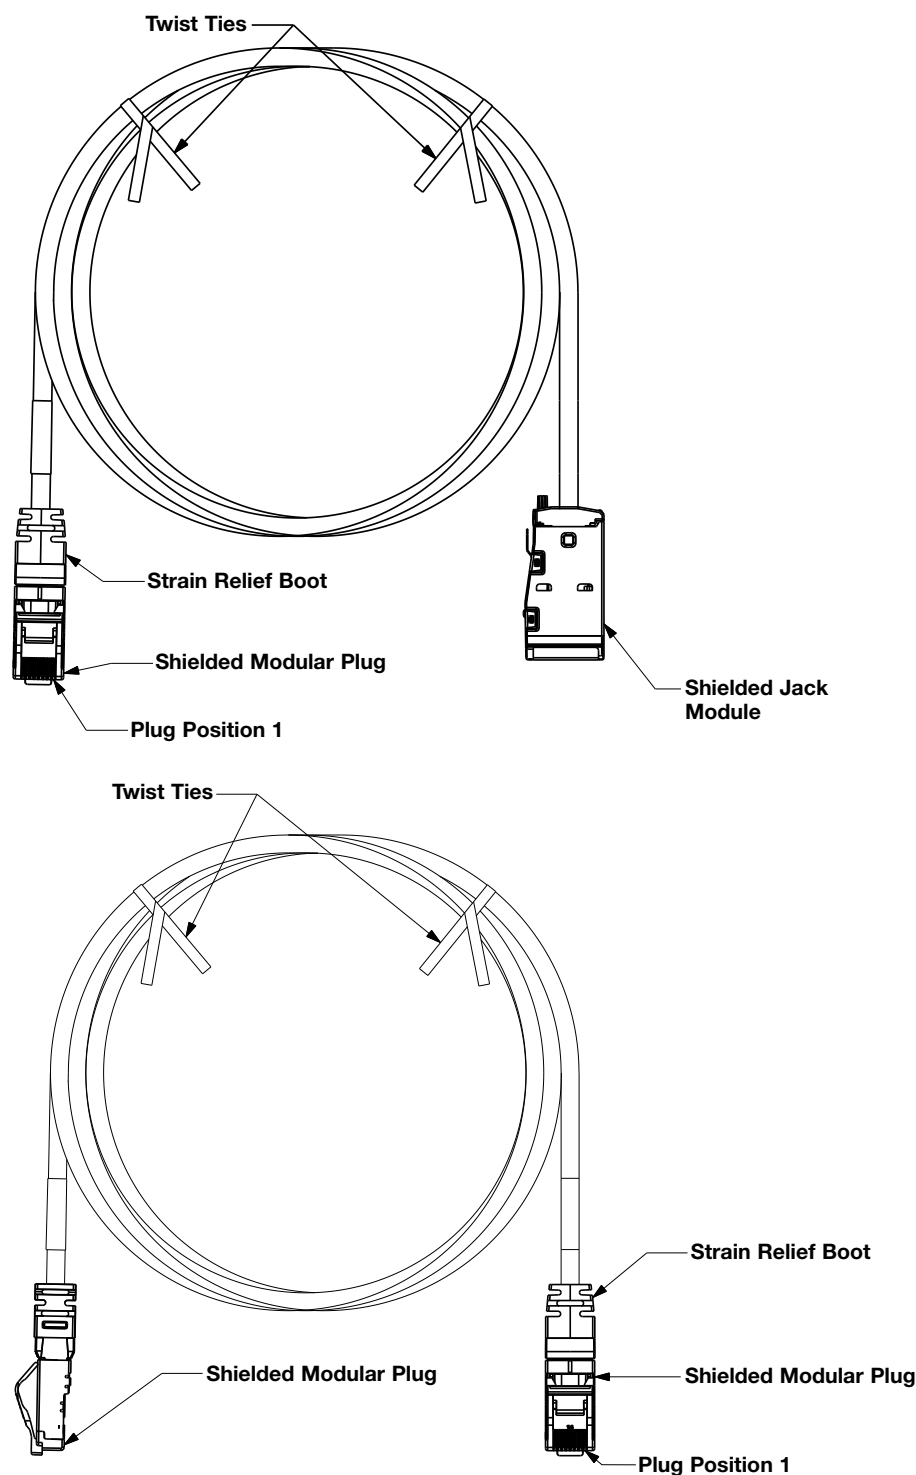

Manufactured in Romania, Costa Rica, and China.

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

# PANDUIT®

For more information  
**Visit us at [www.panduit.com](http://www.panduit.com)**  
Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

© 2022 Panduit Corp.  
ALL RIGHTS RESERVED.  
COSP324-WW-ENG  
8/2022