


- 1

Technical Data

Tensile strength	≥ 150 N
Manufacturing tolerance	± 1 mm/m
Adhesive	Acrylate-based adhesive ; curing 72 h
Adhesive strength	Average values (FTM2) Aluminum : 24 N / 25 mm High grade stainless steel : 25 N / 25 mm ABS : 22 N / 25 mm PP : 18 N / 25 mm HD-PE : 12 N / 25 mm LD-PE : 12 N / 25 mm

Type Code

Ordering information

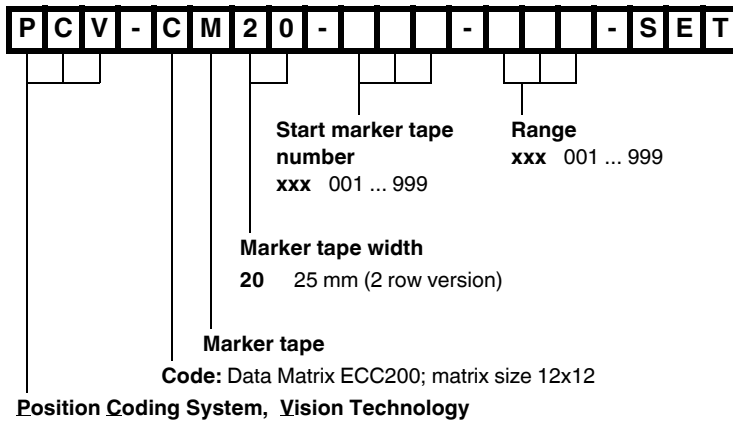

Example for order information

Event markers **150** to **199** are required.

The order designation is formed as follows:

Format: End marker tape no. - Start marker tape no. + 1 = range

Example calculation: **199** - **150** + 1 = range

49 + 1 = range

50 = range

Order designation: PCV-CM20-**150-050**-SET

Delivery: **50** marker tapes, each 1 m long

Example for individual Event Markers

PCV-CM20-150-000-SET

Event marker 150 will be delivered. Marker tape length 1 m.

Example for Event Marker Set

PCV-CM20-150-050-SET

Event markers 150 to 199 will be delivered. Marker tape length for each number is 1 m.

PCV-CM20-001-015-SET

Event markers 1 to 15 will be delivered. Marker tape length for each number is 1 m.