

Inductive ring sensor


RJ43-E2



- 43 mm inside diameter
- 3-wire DC



Dimensions

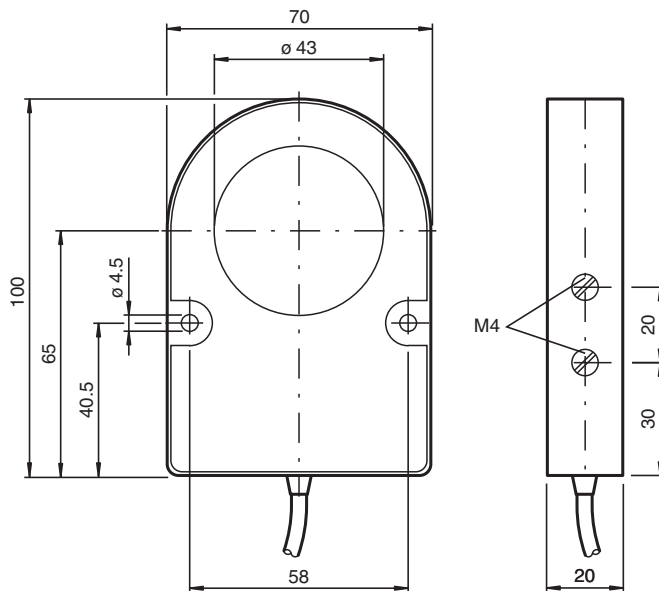

Technical Data

General specifications

Switching function	Normally open (NO)	
Output type	PNP	
Output polarity	DC	
Inside diameter	43 mm	
Measuring cylinder		
Diameter	9 mm	
Length	18 mm	
Material	9S20K	
Output type	3-wire	

Nominal ratings

Operating voltage	U _B	10 ... 30 V DC
Switching frequency	f	0 ... 500 Hz
Hysteresis	H	typ. 5%

Release date: 2025-02-27 Date of issue: 2025-02-27 Filename: 012368_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U _d	≤ 3 V
Operating current	I _L	0 ... 200 mA
No-load supply current	I ₀	≤ 20 mA
Functional safety related parameters		
MTTF _d		1326 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
Standards		EN IEC 60947-5-2
Approvals and certificates		
UL approval		cULus Listed, General Purpose
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications		
Connection type		cable
Housing material		PBT
Degree of protection		IP67
Cable		
Wire end ferrules		yes
Cable diameter		4.6 mm ± 0.2 mm
Bending radius		> 10 x cable diameter
Material		PVC
Color		grey
Number of cores		3
Core cross section		0.34 mm ²
Length	L	2 m
Dimensions		
Height		100 mm
Width		70 mm
Length		20 mm

Connection



Release date: 2025-02-27 Date of issue: 2025-02-27 Filename: 012368_eng.pdf