



AS-Interface flat cable VAZ-FK-S-YE

- Cable piercing technique
- Resistant to environmental influence
- Resistant to bending
- Reverse polarity protected due to the shape of the cable
- Halogen-free (PVC-free)
- Does not give off silicone
- Graduations in meters


AS-Interface flat cable



Product Versions

+++ SAFETY +++
Is also available with black SAFETY print (order code VAZ-FK-S-YE-SAFETY)

Dimensions

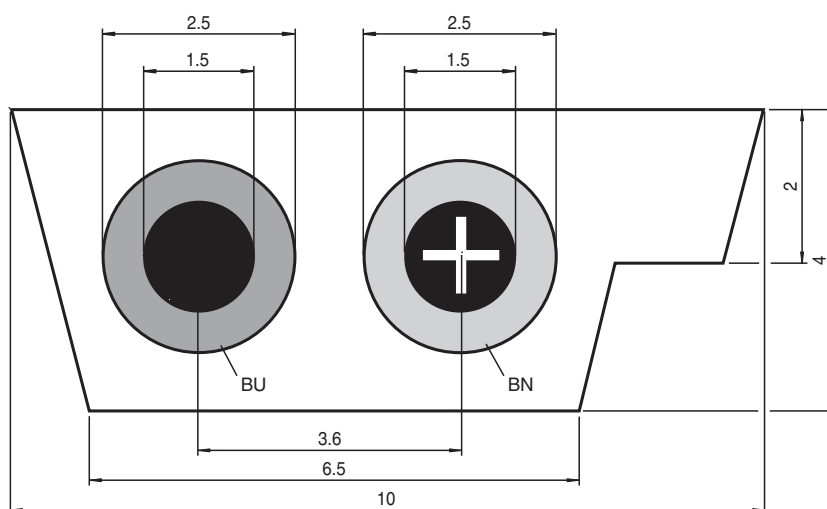

Technical Data

Electrical specifications

Nominal voltage	U_N	30.5 V
Current loading capacity		According to DIN VDE 0298 Part 4, Table 6, Column 4

Ambient conditions

Conductor temperature		Operating mode: 90 °C (363 K) Short-circuit: 200 °C (473 K)
Ambient temperature		
Cable, fixed installation		-40 ... 85 °C (-40 ... 185 °F)
Cable, flexing		-25 ... 85 °C (-13 ... 185 °F)

Mechanical specifications

Core cross section		Copper tin-plated, extra-fine wire, class 6 in accordance with DIN VDE 0295 cross-section 1.5 mm ²
Bending radius		min. permissible bend radii in accordance with DIN VDE 0298 Part 3, Table 2 Bending stress only permitted on the wide side of the cable

Release date: 2025-05-22 Date of issue: 2025-05-22 Filename: 040921_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Tension loading		max. 50 N/mm ² on laying acc. to DIN VDE 0298 Part 3
Material		Thermoplastic Elastomer (TPE) Rubber compound EM3, based on DIN VDE 0207 Part 21
Core insulation		Thermoplastic Elastomer (TPE)
Cable		
Sheath color		yellow (similar to RAL 1012)
Number of cores		2
Cores color		Core 1: brown Core 2: blue
Cable length		100 m
Note		The cable is intended for use as a bus power line in inside areas. Only cable with a black sheathing is suitable for outside use.