




Activator BT-F130-A

- Suitable for mounting on valve actuators for use in valve technology

Actuator for F130 series



Dimensions

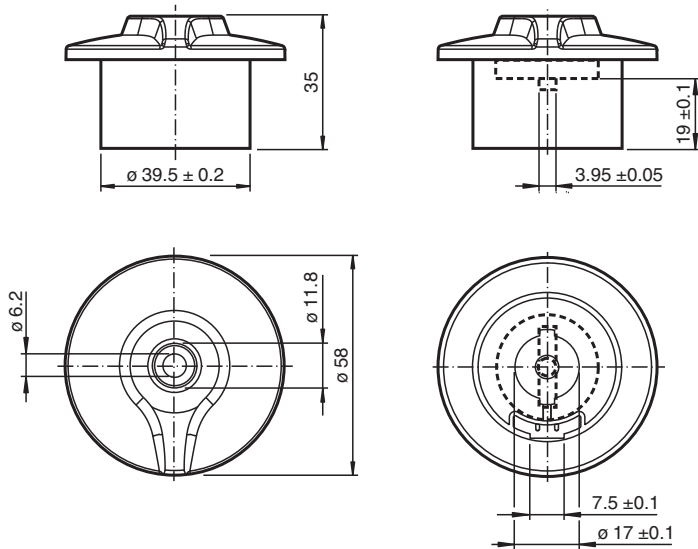

Technical Data

Mechanical specifications

Shaft diameter	< 27.5 mm
Shaft height	20 mm
Material	
Housing	Mounting component: PBT
Spacer disk	PP (1 unit, 5.5 mm strong)
Stopper cap	PBT (1 unit black)
Mounting screw	for activator: 1.4305 / AISI 303 (1 piece M6 x 25)
Mass	25 g
Tightening torque, fastening screws	≤ 1.5 Nm

Release date: 2025-05-22 Date of issue: 2025-05-22 Filename: 199856_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS