

# Adapter plate

## Adaptor plate new VariKont



- Simple and fast mounting
- Suitable for VariKont sensors


Adapter plate

### Function

When exchanging an NJ40+U... for an NBN40-U..., the detection range changes because of the different head dimensions. By using the adapter plate, all offset dimensions (side, height, and depth offset) are compensated for. Sensor mounting is performed laterally, offset to the center of the adapter plate on both notched tabs.

If insufficient space is available at the side in the area of the base, both notched tabs of the adapter plate can be broken off. During subsequent mounting of an NBN40-U... centered on the adapter plate, the height and depth offset (Y and Z) are compensated for – but not, however, the side offset X.

### Dimensions

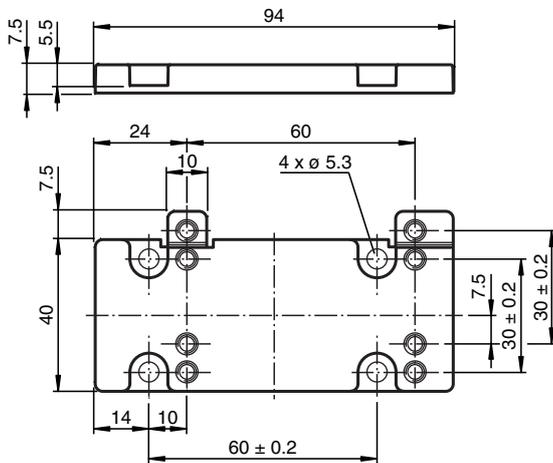

### Technical Data

#### Approvals and certificates

CCC approval CCC approval / marking not required for products rated ≤36 V

#### Ambient conditions

Ambient temperature -25 ... 85 °C (-13 ... 185 °F)

#### Mechanical specifications

Housing material PA 6 Grivory GVN-35H

Material

Mounting screw 4 units, screw M5 X 20 DIN912 A2

Release date: 2020-06-29 Date of issue: 2020-06-29 Filename: 208375\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS

Mounting

