



Inductive sensor NJ8-18GM50-A2

■ 8 mm non-flush

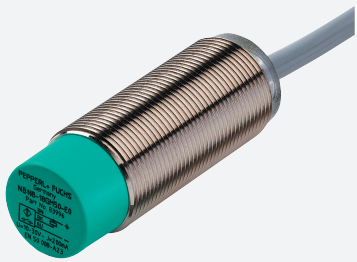

Dimensions



Technical Data

General specifications			
Switching function			complementary
Output type			PNP
Rated operating distance	s_n		8 mm
Installation			non-flush
Output polarity			DC
Assured operating distance	s_a		0 ... 6.48 mm
Reduction factor r_{AI}			0.45
Reduction factor r_{Cu}			0.4
Reduction factor r_{304}			0.7
Output type			4-wire
Nominal ratings			
Operating voltage	U_B		10 ... 60 V
Switching frequency	f		0 ... 500 Hz
Hysteresis	H		typ. 8 %
Reverse polarity protection			reverse polarity protected
Short-circuit protection			pulsing

Release date: 2025-06-04 Date of issue: 2025-06-04 Filename: 222503_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Voltage drop	U _d	≤ 3 V
Operating current	I _L	0 ... 400 mA
Off-state current	I _r	0 ... 0.5 mA
No-load supply current	I ₀	≤ 15 mA
Switching state indicator	all direction LED, yellow	
Functional safety related parameters		
MTTF _d		1150 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
Standards		EN IEC 60947-5-2
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CCC approval		Certified by China Compulsory Certification (CCC)
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications		
Connection type		cable
Housing material		Stainless steel 1.4305 / AISI 303
Sensing face		PBT
Degree of protection		IP67
Cable		
Wire end ferrules		yes
Cable diameter		6.2 mm ± 0.2 mm
Bending radius		> 10 x cable diameter
Material		PVC
Color		black
Number of cores		4
Core cross section		0.5 mm²
Length	L	2 m
Dimensions		
Length		50 mm
Diameter		18 mm

Connection



Release date: 2025-06-04 Date of issue: 2025-06-04 Filename: 222503_eng.pdf