

Bulk Raw Cable


CBL-PVC-GY-04x034-100M



Cable, PVC/PVC, 4-core grey



Dimensions

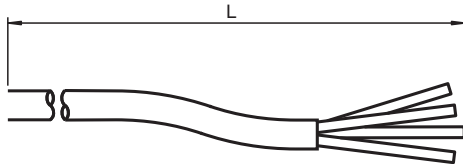

Technical Data

Electrical specifications		
Operating voltage	U _B	max. 300 V AC/DC
Conformity		
Flammability		IEC 60332-2-2
Ambient conditions		
Ambient temperature		
Cable, fixed installation		-25 ... 70 °C (-13 ... 158 °F)
Cable, flexing		-25 ... 80 °C (-13 ... 176 °F)
Pollution degree		3
Mechanical specifications		
Cable		according to IEC/EN 60228 (DIN VDE 0295) class 5
Sheath diameter		4.8 mm ± 0.2 mm
Bending radius		> 10 x cable diameter, movable installation
Sheath stripping force		max. 80 N / 300 mm
Sheath color		grey (similar to RAL 7001)
Number of cores		4
Core cross section		0.34 mm ²
Cores color		Core 1: brown Core 2: white Core 3: blue Core 4: black
Core construction		19 x 0.15 mm Ø
Length	L	100 m
Cable code		Li Y YM 4 x 0,34
Mass		3465 g

Release date: 2025-02-14 Date of issue: 2025-02-14 Filename: 227000_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Material		
Cable		
Sheathing		PVC
Cores		bare copper (Cu)
Core insulation		PVC
Flammability		flame-resistant

Connection Assignment

_____	-----	_____	BN
_____	-----	_____	WH
_____	-----	_____	BU
_____	-----	_____	BK

Release date: 2025-02-14 Date of issue: 2025-02-14 Filename: 227000_eng.pdf