

Bulk Raw Cable

CBL-PVC-BK-04x034-100M




■ cURus approval

Cable, PVC/PVC, 4-core black, UL approved



Dimensions

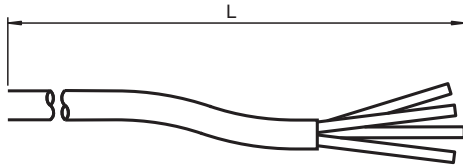

Technical Data

Electrical specifications

Operating voltage U_B max. 300 V AC/DC

Conformity

Flammability UL 1581 , IEC 60332-1-2

Approvals and certificates

UL approval AWM STYLE 2095 AWM I/II A/B 80°C 300V FT1

Ambient conditions

Ambient temperature

Cable, fixed installation -40 ... 80 °C (-40 ... 176 °F)

Cable, flexing -20 ... 80 °C (-4 ... 176 °F)

Pollution degree 3

Mechanical specifications

Cable according to IEC/EN 60228 (DIN VDE 0295) class 5

Sheath diameter 4.3 mm \pm 0,1 mm

Bending radius > 15 x cable diameter, movable installation
> 5 x cable diameter, fixed installation

Sheath stripping force max. 50 N / 300 mm

Sheath color black (similar to RAL 9005)

Number of cores 4

Core cross section 0.34 mm²

Cores color Core 1: brown
Core 2: white
Core 3: blue
Core 4: black

Core construction 19 x 0.15 mm \varnothing

Length L 100 m

Release date: 2025-02-14 Date of issue: 2025-02-14 Filename: 243715_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

| | |
|-----------------|------------------|
| Cable code | Li YY 4 x 0,34 |
| Mass | 2920 g |
| Material | |
| Cable | |
| Sheathing | PVC |
| Cores | bare copper (Cu) |
| Core insulation | PVC |
| Flammability | FT1 |

Connection Assignment



Release date: 2025-02-14 Date of issue: 2025-02-14 Filename: 243715_eng.pdf