




AS-Interface splitter box VAZ-2T1-FK-G10-1M-PUR-V1-GV4A

- One piece housing
- Screw connection stainless steel
- Simple and fast mounting
- Gold-plated and machined contacts
- Oil- and abrasion-resistant PUR cable
- Immunity to vibration
- Degree of protection IP68 / IP69K
- Halogen-free

Splitter box G10, AS-Interface and auxiliary voltage to 1 x M12 round connector



Dimensions

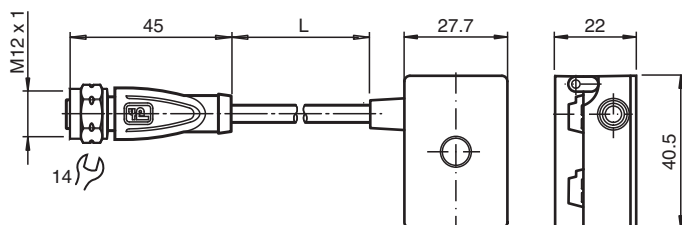

Technical Data

General specifications			
Construction type		Socket, straight Flat cable terminals AS-Interface/ext. auxiliary voltage	
Electrical specifications			
Rated operating voltage	U _e	≤ 60 V PELV	
Rated operating current	I _e	≤ 4 A AS-Interface, ≤ 4 A AUX	
Protection class		III	
Surge protection		overvoltage category III	
Pulse withstand voltage		800 V	
Compliance with standards and directives			
Standard conformity			
Degree of protection		EN 60529:2000	
Approvals and certificates			
UL approval		cULus Listed, Type 1 enclosure	
Application		for use in NFPA 79 applications	
Maximum permissible operating voltage		max. 32 V	
Maximum permissible operating current		max. 3 A	
Maximum permissible ambient temperature		max. 55 °C (max. 131 °F)	
UL File Number		E223772	
Ambient conditions			
Ambient temperature		-25 ... 75 °C (-13 ... 167 °F)	
Storage temperature		-25 ... 85 °C (-13 ... 185 °F)	
Pollution degree		3	
Mechanical specifications			

Release date: 2024-12-12 Date of issue: 2024-12-12 Filename: 253966_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS


Technical Data

Degree of protection	IP67 IP67 / IP68 / IP69K with flat cable VAZ-FK-S-*	
Connection		Flat cable AS-Interface: cable piercing method Flat cable ext. auxiliary voltage U _{AUX} : Insulation penetration technology Plug connection: M12 x 1 socket (V1)
Material		
Contacts		CuSn / Au
Housing		PBT PC
Body		PUR, black
Cable		PUR
Slotted nut		Stainless steel 1.4404 / AISI 316L
Mounting screw		Stainless steel 1.4305 / AISI 303
Cable		
Sheath diameter		Ø4.8 mm
Color		black
Cores		4 x 0.5 mm ²
Length	L	1 m
Mass		75 g
Tightening torque, fastening screws		1.65 Nm
Dimensions		
Height		22 mm
Width		27.7 mm
Length		40.5 mm
Note	The unused flat cable connector is closed with a seal.	

Connection

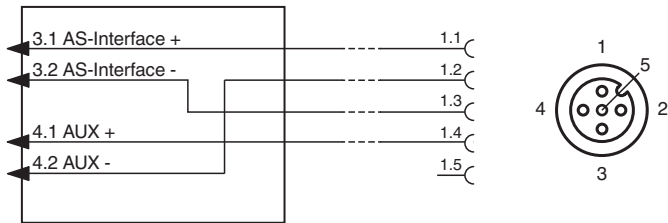

Mounting

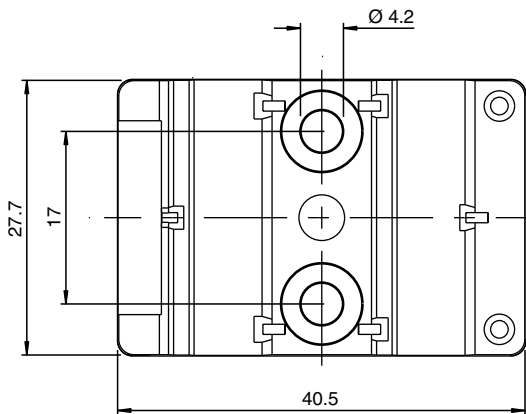

You may screw the device onto a level mounting surface using two M4 attachment screws. The attachment screws are not included.

Release date: 2024-12-12 Date of issue: 2024-12-12 Filename: 253966_eng.pdf