





Inductive slot sensor SB3,5-A2-0,5M-V31

- 3.5 mm slot width
- 4-wire DC

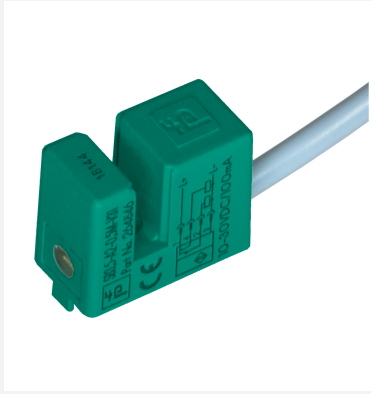

Dimensions

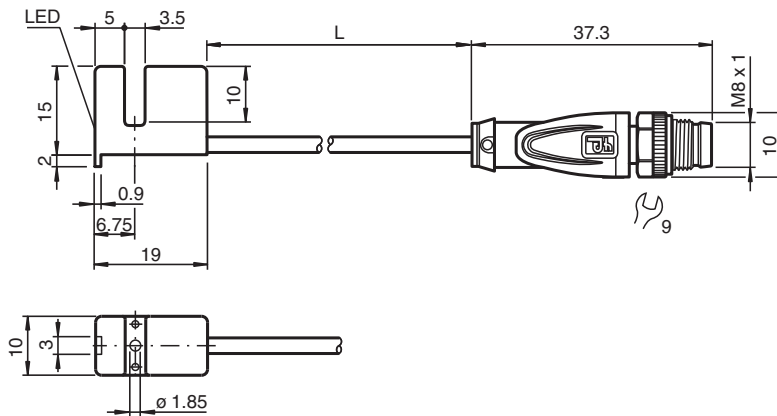

Technical Data

General specifications

Switching function	complementary
Output type	PNP
Slot width	3.5 mm
Depth of immersion (lateral)	5 ... 7 mm
Output polarity	DC
Output type	3-wire

Nominal ratings

Operating voltage	U_B	10 ... 30 V DC
Switching frequency	f	0 ... 3000 Hz
Hysteresis	H	0.1 ... 0.4 mm
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 2 V
Operating current	I_L	0 ... 100 mA
No-load supply current	I_0	≤ 15 mA
Switching state indicator		LED

Compliance with standards and directives

Release date: 2024-05-28 Date of issue: 2024-06-02 Filename: 264846_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Standard conformity		
Standards		EN IEC 60947-5-2
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-25 ... 85 °C (-13 ... 185 °F)
Mechanical specifications		
Connection type		fixed cable with plug
Housing material		Crastin (PBTB)
Degree of protection		IP67
Connector		
Threading		M8 x 1
Tightening torque		0.4 Nm
Number of pins		4
Cable		
Cable diameter		3 mm + 0.3 mm
Bending radius		> 10 x cable diameter
Material		PVC
Color		grey
Number of cores		4
Core cross section		0.14 mm ²
Length	L	0.5 m
Mass		24 g
Dimensions		
Height		15 mm
Width		10 mm
Length		19 mm
General information		
Scope of delivery		screw M 1.7 x 10 , nut M1.7

Connection



Connection Assignment



Release date: 2024-05-28 Date of issue: 2024-06-02 Filename: 264846_eng.pdf

Connection Assignment

Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Release date: 2024-05-28 Date of issue: 2024-06-02 Filename: 264846_eng.pdf