




Valve Connector Cordset VMB-2+P-10M-PUR

- Valve connector according EN 175301-803 A/ISO 4400
- Moulded seal
- Suitable for drag chains and abrasion resistant
- Flame resistant cable
- Halogen-free
- Oil resistant
- Immunity to vibration

Valve connector Form B, 2-pin+PE, PUR cable black, drag chain suitable



Dimensions

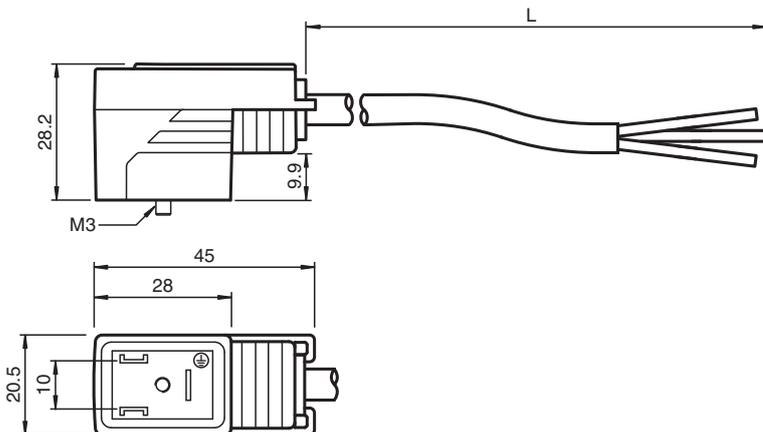

Technical Data

General specifications

| | |
|-------------------|-----------------------|
| Connector 1 | |
| Connection | Valve connector DIN |
| Construction type | form B |
| Style | angled |
| Locking | screw connection |
| Number of pins | 2 + PE |
| Connector 2 | |
| Connection | cable end |
| Customization | sheath stripped 50 mm |

Electrical specifications

| | | |
|-------------------|-------|------------------|
| Operating voltage | U_B | max. 230 V AC/DC |
| Operating current | I_B | max. 6 A |

Conformity

| | |
|----------------------|---|
| Degree of protection | EN 60529 |
| Plug connection | Valve connector : DIN EN 175301-803 |
| Flammability | DIN VDE 0482 , DIN EN 50265-2-1 , UL 94 |

Release date: 2025-02-09 Date of issue: 2025-02-10 Filename: 456839_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

| | | |
|----------------------------------|---|---|
| Halogen-free | | DIN VDE 0472-815 |
| UV resistance | | DIN EN ISO 4892-2-A |
| Oil resistance | | DIN EN 60811-2-1 |
| Ambient conditions | | |
| Ambient temperature | | |
| Plug connector | | -20 ... 85 °C (-4 ... 185 °F) |
| Cable, fixed installation | | -40 ... 80 °C (-40 ... 176 °F) |
| Cable, flexing | | -20 ... 80 °C (-4 ... 176 °F) |
| Pollution degree | | 3 |
| Mechanical specifications | | |
| Plug connector | | |
| Tightening torque | | 0.6 Nm |
| Tool installation | | screw M3 x 29 |
| Mating cycles | | min. 100 |
| Degree of protection | | IP65 / IP67 |
| Cable | | |
| Sheath diameter | | 4.5 mm |
| Bending radius | | > 10 x cable diameter, movable installation > 5 x cable diameter, fixed installation |
| Sheath color | | black (similar to RAL 7021) |
| Number of cores | | 3 |
| Core cross section | | 0.5 mm ² |
| Cores color | | Core 1-4: black Core 2-3: black Core PE-5: green/yellow |
| Core construction | | 28 x 0.15 mm Ø |
| Length | L | 10 m |
| Cable code | | Li 9Y 11Y 3 x 0,50 |
| Drag chain suitability | | |
| Drag chain cycles | | min. 15000000 |
| Motion velocity | | max. 5 m/s |
| Traverse distance | | 0.9 m |
| Acceleration | | max. 30 m/s ² |
| Mass | | 305 g |
| Material | | |
| Halogen-free | | yes |
| Plug connector | | |
| Body | | TPU, black |
| Seal | | TPU , molded |
| Contact surface | | Sn |
| Flammability | | V-0 |
| Cable | | |
| Sheathing | | PUR |
| Cores | | bare copper (Cu) |
| Core insulation | | PP |
| UV resistance | | yes |
| Oil resistance | | good |
| Flammability | | V-0 |


Release date: 2025-02-09 Date of issue: 2025-02-10 Filename: 456839_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0001
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Connection

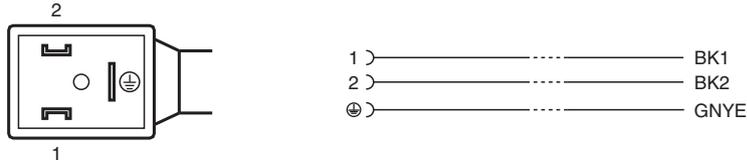

Release date: 2025-02-09 Date of issue: 2025-02-10 Filename: 456839_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**