

Male connector, field-attachable V15SL-W-BK




- Field-attachable
- Screw terminal connection
- Metal locking
- Knurled nut suitable for tool assembly

Male connector M12 angled L-coded 5-pin, for cable diameter 8 - 13 mm, field-attachable



Dimensions

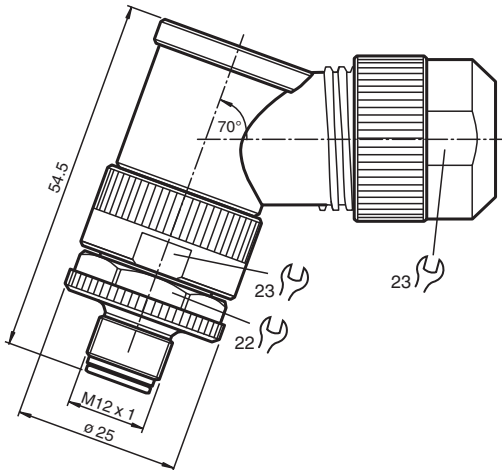

Technical Data

General specifications

Connector 1	
Connection	plug
Construction type	M12
Style	angled
Locking	screw connection
Number of pins	5
Coding	L-coded
Customization	Coding rotateable in steps of 72°

Electrical specifications

Rated operating voltage	U_e	max. 48 V AC / 63 V DC
Rated operating current	I_e	1.5 mm ² , AWG 16 : 12 A 2.5 mm ² , AWG 14 : 16 A
Insulation resistance		min. 10000 MΩ

Conformity

Degree of protection	EN 60529
Plug connection	connector M12 x 1 : IEC 61076-2-101

Release date: 2025-01-30 Date of issue: 2025-01-30 Filename: 70101883_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Ambient conditions		
Ambient temperature		-40 ... 105 °C (-40 ... 221 °F)
Pollution degree		3
Mechanical specifications		
Plug connector		
Tightening torque		0.6 Nm
Tool installation		straight knurling , hexagon nut SW = 22 mm
Mating cycles		min. 100
Degree of protection		IP67
Connection		screw terminals for max. 1.5 mm² / AWG 16 with wire end ferrule screw terminals for max. 2.5 mm² / AWG 14 without wire end ferrules
Cable		
Sheath diameter		8 ... 13 mm
Core cross section		2.5 mm² / 14 AWG max.
Mass		45.96 g
Material		
Plug connector		
Screw connection		CuZn, nickel-plated
Body		PA, black
Contact surface		Au
Flammability		V-0

Connection Assignment



Release date: 2025-01-30 Date of issue: 2025-01-30 Filename: 70101883_eng.pdf