

Bulk Raw Cable

CBL-PUR-O1S-BK-04x050-100M




- Suitable for outdoor use (UV- and ozone resistant)
- Suitable for drag chains and abrasion resistant
- Free of paint wetting interfering substances
- Resistant to microbes and hydrolysis
- Resistant to salt water
- cURus approval
- Halogen-free

Cable, PUR/PP, 4-core black, shielded, UL approved, drag chain suitable, outdoor



Dimensions

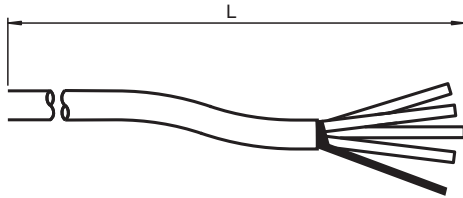

Technical Data

Electrical specifications

Operating voltage	U_B	max. 300 V AC
-------------------	-------	---------------

Conformity

Flammability	UL 1581; DIN EN 60332-2-2
Halogen-free	DIN VDE 0472-815 / DIN EN 50267-2-1
Oil resistance	DIN EN 60811-2-1

Approvals and certificates

UL approval	AWM STYLE 21924/11558 105°C 300V AWM I A/B 105°C 300V FT2
-------------	---

Ambient conditions

Ambient temperature	
Cable, fixed installation	-50 ... 105 °C (-58 ... 221 °F)
Cable, flexing	-30 ... 105 °C (-22 ... 221 °F)
Pollution degree	3

Mechanical specifications

Cable	according to IEC/EN 60228 (DIN VDE 0295) class 6
Sheath diameter	6 mm ± 0.2 mm
Bending radius	> 10 x cable diameter, movable installation > 5 x cable diameter, fixed installation
Sheath stripping force	max. 80 N / 300 mm
Sheath color	black (similar to RAL 7021)
Number of cores	4
Core cross section	0.5 mm ²
Cores color	Core 1: brown Core 2: white Core 3: blue Core 4: black

Release date: 2025-02-14 Date of issue: 2025-02-14 Filename: 70116170_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Core construction		28 x 0.15 mm Ø
Shield		tinned copper braiding, 85 % coverage
Length	L	100 m
Cable code		Li 9Y C11Y 4 x 0,50
Drag chain suitability		
Drag chain cycles		min. 2000000
Motion velocity		max. 3 m/s
Traverse distance		max. 10 m
Acceleration		max. 10 m/s ²
Mass		5892 g
Material		
PWIS free		yes
Halogen-free		yes
Cable		
Sheathing		PUR based on polyether
Coors		bare copper (Cu)
Core insulation		PP
Salt water resistance		yes
UV resistance		yes
Chemical resistance		good
Oil resistance		yes
Cooling lubricant resistance		yes
Microbial resistance		yes
Hydrolysis resistance		yes
Flammability		FT2

Connection Assignment

