

Male connector, field-attachable

V31S-WM-BK




- Screw terminal connection
- Metal locking
- UL Recognized Component

Male connector M8 angled A-coded 4-pin, for cable diameter 3,5 - 5 mm, field-attachable



Dimensions

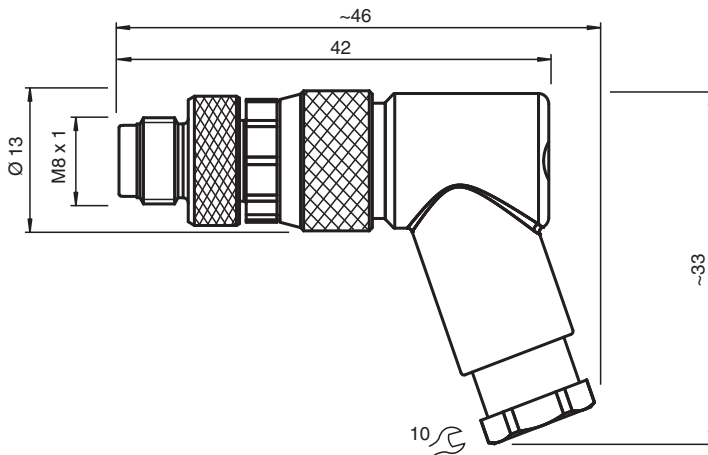

Technical Data

General specifications

Connector 1	
Connection	plug
Construction type	M8
Style	angled
Locking	screw connection
Number of pins	4
Coding	A-coded
Customization	Coding rotateable in steps of 180°

Electrical specifications

Operating voltage	U_B	max. 30 V AC/DC
Operating current	I_B	max. 4 A

Conformity

Degree of protection	EN 60529
Plug connection	connector M8 x 1 : IEC 61076-2-104

Approvals and certificates

UL File Number	E363587
----------------	---------

Ambient conditions

Release date: 2024-06-03 Date of issue: 2024-06-08 Filename: 70116193_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**


Technical Data

Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
Pollution degree	3
Mechanical specifications	
Plug connector	
Tightening torque	0.5 Nm
Tool installation	cross-hatched knurling
Mating cycles	min. 100
Degree of protection	IP67
Connection	screw terminals for 0.14 ... 0.5 mm² / AWG 26 ... AWG 20
Cable	
Sheath diameter	3.5 ... 5 mm
Core cross section	0.5 mm² / 20 AWG max.
Installation	screw terminals 0.4 Nm pressure nut 0.2 ... 0.3 Nm
Mass	11.63 g
Material	
Plug connector	
Screw connection	CuZn, nickel-plated
Body	PBT, black
Contact surface	gold plated (Au)

Connection Assignment



Connection

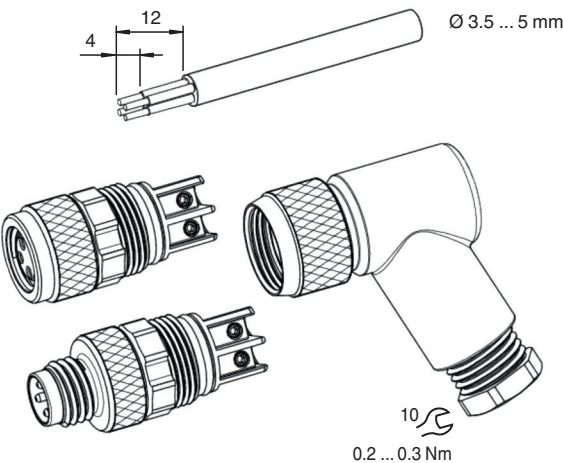

Release date: 2024-06-03 Date of issue: 2024-06-08 Filename: 70116193_eng.pdf