

Bulk Raw Cable

CBL-PUR-U/ABG-BK-05x034-100M




- Suitable for drag chains and abrasion resistant
- Resistant to microbes and hydrolysis
- UV resistant
- cURus approval
- Halogen-free

Cable, PUR/PP, 5-core black, shielded, UL approved, drag chain suitable



Dimensions

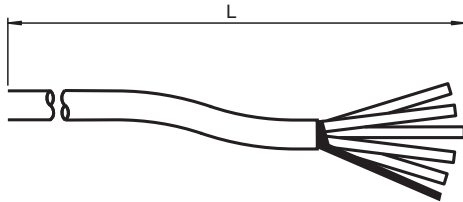

Technical Data

Electrical specifications

Operating voltage U_B max. 300 V AC/DC

Conformity

Flammability UL 1581; DIN EN 60332-2-2

Halogen-free DIN VDE 0472-815

Approvals and certificates

UL approval AWM STYLE 20549/10493 80°C 300V FT2

Ambient conditions

Ambient temperature

Cable, fixed installation -40 ... 80 °C (-40 ... 176 °F)

Cable, flexing -25 ... 80 °C (-13 ... 176 °F)

Pollution degree 3

Mechanical specifications

Cable according to IEC/EN 60228 (DIN VDE 0295) class 6

Sheath diameter 6 mm

Bending radius > 10 x cable diameter, movable installation
> 5 x cable diameter, fixed installation

Sheath stripping force max. 60 N / 100 mm

Sheath color black (similar to RAL 9005)

Number of cores 5

Core cross section 0.34 mm²

Cores color
Core 1: brown
Core 2: white
Core 3: blue
Core 4: black
Core 5: grey

Release date: 2025-02-14 Date of issue: 2025-02-14 Filename: 70136749_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Core construction		42 x 0.1 mm Ø
Shield		tinned copper braiding, 85 % coverage
Length	L	100 m
Cable code		Li F 9Y C11Y 5 x 0,34
Drag chain suitability		
Drag chain cycles		min. 2000000
Motion velocity		max. 3 m/s
Traverse distance		max. 5 m
Acceleration		max. 5 m/s ²
Mass		4950 g
Material		
Halogen-free		yes
Cable		
Sheathing		PUR based on polyether
Cores		bare copper (Cu)
Core insulation		PP
UV resistance		yes
Chemical resistance		good
Oil resistance		yes
Cooling lubricant resistance		yes
Microbial resistance		yes
Hydrolysis resistance		yes
Flammability		FT2

Connection Assignment

