

Photoelectric slot sensor GL5-L/43a/115



- Miniature design
- Optimized for the detection of small parts
- High switching frequency
- Simple and fast mounting
- Clearly visible LED functional display

Miniature photoelectric slot sensor for the detection of small parts, L design, fork width 5 mm, infrared light, PNP outputs, fixed cable



Function

The GL5 miniature slot sensor compares a high optical performance in a small housing and is optimized to the requirements in semiconductors industry for small part detection. A wide voltage range of 5 - 24 V DC and the fastest switching frequency of 5 kHz in its class stands for the quality of this sensor. The integrated aperture allows the small part detection with a minimum object size of 0.8 x 1.8 mm. The sensor offers antivalent npn or pnp outputs. Due to a variety of different housings and an optimized housing concept offers the sensor a maximum of freedom in a crowded mounting environment.

Application

- Detection of lead frames
- Detection of cam positions
- Detection of limit positions of moving objects
- Position detection of wafer cases

Technical drawing of a mechanical part, showing three views: front, top, and side. The drawing includes dimensions and labels for the optical axis and operating indicator.

Front View Dimensions:

- Overall width: 13.4
- Overall height: 15.5
- Top section width: 5
- Top section height: 2.9
- Bottom section width: 19
- Bottom section height: 7.2
- Bottom section diameter: $\phi 3.2$
- Left side height: 3.6
- Left side width: 9
- Right side height: 8.5

Top View Dimensions:

- Overall width: 26
- Overall height: 18.5
- Top section width: 19
- Top section height: 7
- Top section diameter: $\phi 2.6$
- Bottom section width: 13.4
- Bottom section height: 4.8
- Bottom section diameter: $\phi 2.6$
- Left side height: 3.2
- Left side width: 7

Side View Dimensions:

- Overall width: 6.4
- Overall height: 6.5
- Top section width: 3.1

Labels:


- optical axis
- operating indicator

General specifications		
Light source		IREd
Light type		Infrared, continuous light , 940 nm
Target size		0.8 x 1.8 mm
Slot width		5 mm
Slot depth		8.5 mm
Ambient light limit		1000 Lux
Functional safety related parameters		
MTTF _d		3760 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Function indicator		red LED lights up when receiving the light beam
Electrical specifications		
Operating voltage	U _B	5 ... 24 V DC , class 2
No-load supply current	I ₀	max. 20 mA
Time delay before availability	t _v	< 2 ms
Output		
Switching type		light/dark on
Signal output		2 PNP complementary , overvoltage protected
Switching voltage		max. 30 V DC
Switching current		max. 50 mA , resistive load
Voltage drop	U _d	max. 0.2 V at 10 mA max. 0.6 V at 50 mA
Switching frequency	f	max. 5 kHz
Response time		40 μs Light beam is not interrupted 80 μs Light beam is interrupted

Technical Data

Repeat accuracy	R	0.03 mm
Compliance with standards and directives		
Directive conformity		
EMC Directive 2004/108/EC		EN 60947-5-2:2007+A1:2012
Standard conformity		
Standards		UL 60947-5-2
Approvals and certificates		
UL approval		cULus Recognized, Class 2 Power Source
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-25 ... 55 °C (-13 ... 131 °F)
Storage temperature		-30 ... 80 °C (-22 ... 176 °F)
Pollution degree		2
Mechanical specifications		
Degree of protection		IP50
Connection		2 m cable , 4 x 0.08 mm² , PVC
Material		
Housing		PBT
Mass		25 g
Tightening torque, fastening screws		0.6 Nm
Dimensions		
Height		26 mm
Width		18.5 mm
Length		15.5 mm
Cable length		2 m


Connection Assignment

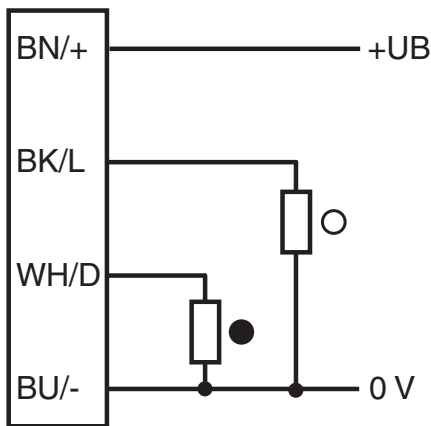

○ = Light on
● = Dark on

Release date: 2025-06-14 Date of issue: 2025-06-14 Filename: 801673_eng.pdf

Technical Features

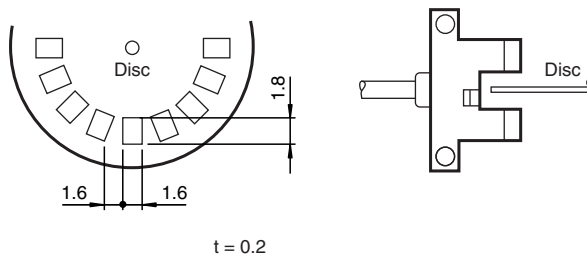

Response frequency

The response frequency is the value when the disc is rotated, see figure.