

PHILIPS

Ledinaire Panel RC065B

Scan me!

DOWNLOAD

indoor

IP20
IP40

RG0

220V
240V

50Hz
60Hz


Life
50K hrs
@L80

Life
75K hrs
@L70

Max.
35°C
Min.
-10°C

GLOW
WIRE
650°C

	IK	Energy efficiency class of light source	L x W x H (mm)	EL kit compatible	kg
RC065B G5 34S/840 PSU W60L60 OC CFW ELR	IK03	D	595x595x35	YES	1.80
RC065B G5 34S/840 PSU W60L60 NOC CFW ELR	IK03	D	595x595x34	YES	1.30



VPC visible profile ceiling

SP suspended

SM surface mounted

PCV plaster ceiling

Available as accessory

Suspension set:
911401809487 : RC159Z SME-3 WH

Surface mounted set:
911401808087 : RC059Z SMB W60L60

Plaster set:
911401809287 : RC159Z SMB-PLC

Safety cable:
911401809187 : RC159Z SC

Wiring connection
Unit : mm

N : Blue
L : Brown
Please use IP20 or higher terminal box
It is not included in package.

Inrush current

28W Electrical characteristics

Imax (A)	36
Tref (µs)	4.5
MCB	Luminaires Max.
B-10 A	15
B-13 A	17
B-16 A	18
C-10 A	15
C-13 A	19
C-16 A	23

Visible Profile Ceiling mounting(VPC)-Lay-In mounting
Install safety cab
(Optional)

Safety cable (SC)

Optional

12NC


912401483602

Description

EM300V ELB_ELP3 kit LV 3.6V 4900mAh LIB

Emergency pack is not provided.

1x

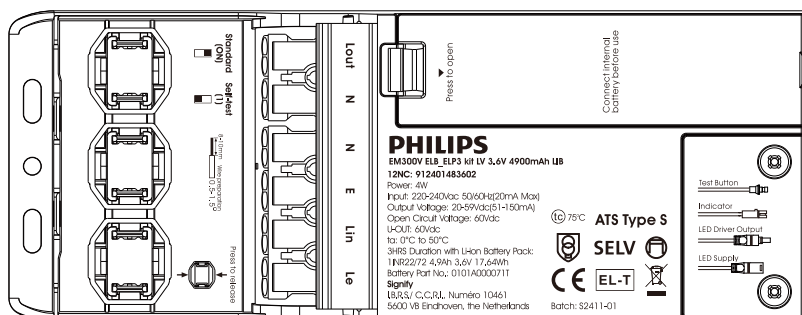

Products compatible with emergency lighting functionality.

12NC	Description	EOC	SKU
911401871288	RC065B G5 34S/840 PSU W60L60 OC CFW ELR	872110334577699	108454468
911401871388	RC065B G5 34S/840 PSU W60L60 NOC CFW ELR	872110334578399	108454469


Installation of Emergency unit (only applied on the product with EL kit compatible)

Installation of Emergency Lighting Kit
(Not included, order separately)

This product is only compatible with:

912401483602 EM300V ELB ELP3 kit LV 3.6V 4900mAh LB

Rated lumen output in emergency mode by emergency unit: min 300lm

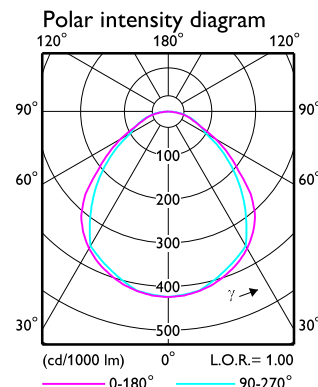

Can be assembled in the luminaires in table 1.
After installing emergency pack, customers shall ensure
that the emergency light comply with IEC60598-2-22.
and maximum ambient temperature shall be less than 30C.

