


Illuminated button
spring-return

Emergency
push button

Options

| | Connection |
|---------------|---|
| Safety switch | A1 Supply input +24 Vdc |
| | A2 Supply input 0 Vdc |
| | IS1 Safety input |
| | OS1 Safety output |
| | IS2 Safety input |
| | OS2 Safety output |
| | IE1 Solenoid activation input for double channel mode |
| | IE2 Solenoid activation input for double channel mode |
| | O3 Signalling output, actuator inserted |
| | O4 Signalling output, actuator inserted and locked |
| | I3 Actuator programming input / reset |
| | I5 EDM input (a) |
| | I4 Solenoid activation input for single channel mode |

(a) Available for NS *5**1***-N*** version only

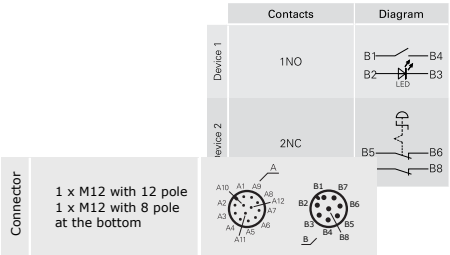

Connector
1 x M12 with 12 pole
1 x M12 with 8 pole
at the bottom

Connections

