



DOT

Proiettore LED orientabile per esterno (IP65) applicabile a plafone, parete e a terra con apposito picchetto in dotazione. Corpo in pressofusione di alluminio verniciato antracite con polveri poliestere ad elevata resistenza ai raggi ultravioletti e alla corrosione.

Diffusore in vetro, alimentatore LED integrato. Disponibile in due temperature colore (3000K e 4000K).


Disponibili giunti certificati IP68 per la realizzazione delle connessioni elettriche, sicure, durevoli e con barriera anticondensa.

Outdoor (IP65) LED adjustable floodlight luminaire, suitable for ceiling, wall and floor mounting with supplied spike.

Die-cast aluminium body, anthracite painted with polyester powders with high resistance to ultraviolet rays and corrosion.

Glass diffuser, integrated LED driver. Available in two gradations (3000K and 4000K).



IP68 linear connectors for moisture protection and anti-condensation linear joints are available.

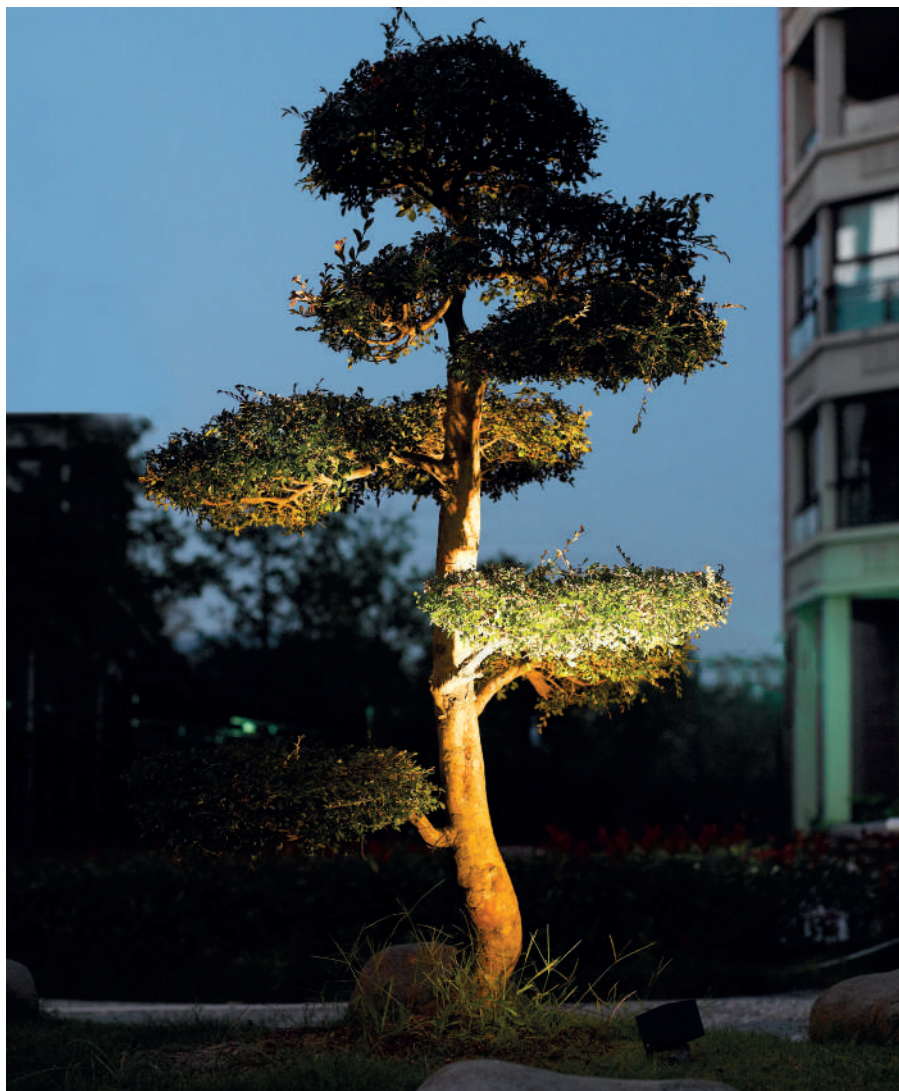

90°

LED 50° CRI≥80 IP65

Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
DOT001	3000K	810	7W	80 x 70 x 117
T.20090-AN	4000K	850	7W	80 x 70 x 117



Finiture Finishes



Antracite Anthracite

Accessori Accessories



connessione IP68
IP68 connection

p.897



picchetto in dotazione
supplied spike