



Scenografico.
Scenographic.



HANG







Apparecchio LED a parete, soffitto e a terra per esterno (IP54), con effetto scenografico di luce. Struttura in pressofusione di alluminio verniciato con polveri poliestere ad elevata resistenza ai raggi ultravioletti e alla corrosione, copertura LED in vetro opaco. Disponibile in tre finiture (grigio, antracite e marrone) e due temperature colore (3000K e 4000K). Alimentatore LED integrato. Disponibili giunti certificati IP68 per la realizzazione delle connessioni elettriche, sicure, durevoli con barriera anticondensa.

Outdoor (IP54) wall, ceiling and ground LED luminaire, with scenographic light emission. Die-cast aluminium body, painted with polyester powders, highly resistant to UV rays and corrosion. Available in three finishes (grey, anthracite and brown) and two gradations (3000K and 4000K). Integrated LED driver IP68 linear connectors for moisture protection and anti-condensation linear joints are available, to be ordered separately.



HANG



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
HAN003XX	3000K	790	7W	Ø90 x 160
HAN004XX	4000K	835	7W	Ø90 x 160



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
HAN002XX	3000K	790	7W	Ø90 x 650
HAN005XX	4000K	835	7W	Ø90 x 650

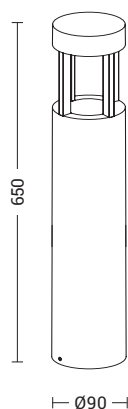

Finiture Finishes



GR



AN



MA

Accessori Accessories



connessione IP68
IP68 connection

p.897