




INDO

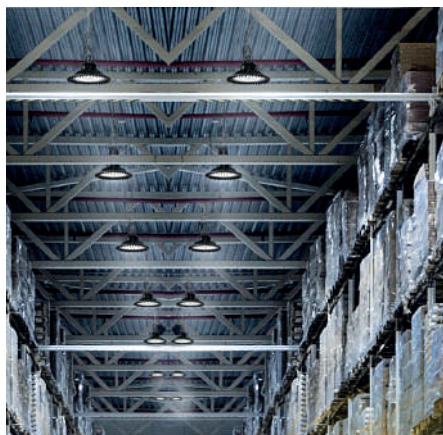

Apparecchio LED installabile a sospensione (catena non disponibile), a soffitto o a parete con l'apposita staffa (da ordinare come accessorio). Struttura in pressofusione di alluminio con diffusore in policarbonato. Adatto per illuminare ampie aree, per l'alto livello di resa luminosa. Disponibile in due misure e relative potenze e una gradazione di colore (4000K). Ottica con apertura fascio di 90° modificabile a 50° con apposita lente (accessorio).

Alimentatore dimmerabile 0-10V integrato. Disponibili giunti certificati IP68 per la realizzazione delle connessioni elettriche con barriera anticondensa.




Circular LED floodlight for suspended version (suspension chain not available), and ceiling and wall installation (with related brackets as accessory). Die-cast aluminium body with polycarbonate diffuser. With high power lighting output, it is suitable for lighting large areas for its high luminous efficiency. Available in two sizes and related powers and one gradation (4000K). Adjustable light beam emission from 90° up to 50° with related accessory.

0-10V dimmable driver included. IP68 linear connectors for moisture protection and anti-condensation linear joints are available.



LED 90° AC100-277V CRI≥80 IP65 IK06

Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
INO001	4000K	16200	120W	Ø330 x 193
INO002	4000K	27000	200W	Ø380 x 200



ACCESSORI ACCESSORIES



Codice Code	Dimensioni mm Dimensions mm
INO010	per codice: 210 x 100 x 120 for code: INO001
INO011	per codice: 230 x 100 x 140 for code: INO002

Staffa di fissaggio in pressofusione, di alluminio verniciato nero, per installazione a parete e plafone. Kit viti non incluso.

Die-cast aluminium fixing bracket for wall and ceiling installation. Screws not included.



Codice Code	Dimensioni mm Dimensions mm
INO014	per codice: Ø330 for code: INO001
INO015	per codice: Ø380 for code: INO002

Lente in policarbonato 50° intercambiabile.
Interchangeable polycarbonate optic 50°.

Finiture Finishes



Nero Black

Accessori Accessories



connessione IP68
IP68 connection