



# KANA

Proiettore LED orientabile per esterno (IP65), applicabile a plafone, parete e terra con apposito picchetto in dotazione. Struttura in pressofusione di alluminio verniciato con polveri poliestere ad elevata resistenza ai raggi ultravioletti e alla corrosione.

Disponibile nella finitura antracite e in due temperature colore (3000K e 4000K). Disponibili giunti certificati IP68 per la realizzazione delle connessioni elettriche, sicure, durevoli e con barriera anticondensa.

Outdoor (IP65) LED adjustable floodlight luminaire, suitable for ceiling, wall and floor mounting with supplied spike.



Die-cast aluminium body, painted with polyester powders, highly resistant to UV rays and corrosion.

Available in anthracite finish and in two gradations (3000K and 4000K).

IP68 linear connectors for moisture protection and anti-condensation linear joints are available.



| Codice<br>Code | CCT   | Flusso lm<br>Flux lm | Potenza<br>Wattage | Dimensioni mm<br>Dimensions mm |
|----------------|-------|----------------------|--------------------|--------------------------------|
| <b>KAN001</b>  | 3000K | 1520                 | 20W                | Ø99 x 120 x 211                |
| <b>KAN003</b>  | 3000K | 1520                 | 20W                | Ø99 x 120 x 580                |

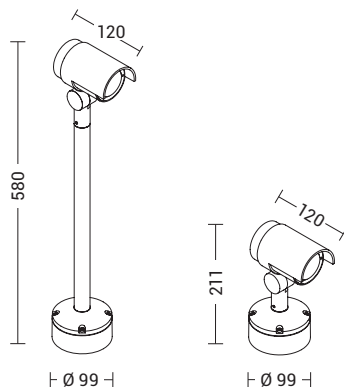

## Finiture Finishes



Antracite Anthracite

## Accessori Accessories



connessione IP68  
IP68 connection

p.897



picchetto in dotazione  
supplied spike