



LARS

Paletto LED da terra per esterno (IP54), struttura in pressofusione di alluminio, verniciato con polveri poliestere ad elevata resistenza ai raggi ultravioletti e alla corrosione.

Diffusore in policarbonato con griglia frangiluce.

Alimentatore LED integrato.

Disponibile in due altezze, due finiture (antracite, grigio) e due temperature colore (3000K e 4000K).

Disponibili giunti certificati IP68 per la realizzazione delle connessioni elettriche, sicure, durevoli e con barriera anticondensa.

Outdoor (IP54) LED bollard in die-cast aluminium body, painted with polyester powders, highly resistant to UV rays and corrosion.



Polycarbonate diffuser with antiglare grid. Integrated LED driver.

Available in two heights, two finishes (anthracite, grey) and in two gradations (3000K and 4000K).

IP68 linear connectors for moisture protection and anti-condensation linear joints are available.



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
LAR001XX	3000K	1308	15W	Ø120 x 265
LAR003XX	4000K	1407	15W	Ø120 x 265
LAR002XX	3000K	1308	15W	Ø120 x 650
LAR004XX	4000K	1407	15W	Ø120 x 650

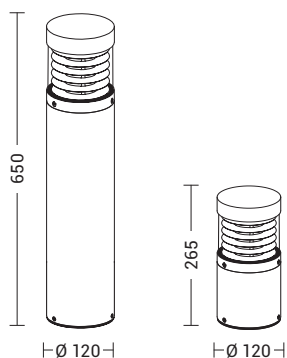

Finiture Finishes



GR



AN

Accessori Accessories

connessione IP68
IP68 connection



p.897