



# Efficienza. Efficiency.

Lampada da soffitto e sospensione LED con CCT settabile in 3 differenti temperature colore (2700-3000-4000K). Struttura in alluminio disponibile nella finitura bianca. Il diffusore in polycarbonato opale garantisce una diffusione uniforme della luce senza abbagliamenti e ombre. Grazie alle ridotte dimensioni e al suo design minimal, è perfetta per illuminare abitazioni moderne e con arredamenti contemporanei.

Ceiling and pendant LED with switch to select three different gradations (2700-3000-4000K).

Lamp with aluminum frame available in white finish. The opal polycarbonate diffuser ensures even light diffusion without glare or shadows. Thanks to its small size and minimal design, it is perfect for lighting modern homes with contemporary furnishings.



SOSPENSIONE / PLAFONE / PARETE  
SUSPENSION / CEILING / WALL

# PLATE



Restyle




# PLATE

Restyle



|            | Codice<br>Code | CCT             | Flusso lm<br>Flux lm | Potenza<br>Wattage | Dimensioni mm<br>Dimensions mm |
|------------|----------------|-----------------|----------------------|--------------------|--------------------------------|
| <i>new</i> | <b>PLT006B</b> | 2700-3000-4000K | 2700                 | 30W                | Ø350 x 62                      |
| <i>new</i> | <b>PLT007B</b> | 2700-3000-4000K | 4400                 | 40W                | Ø450 x 62                      |

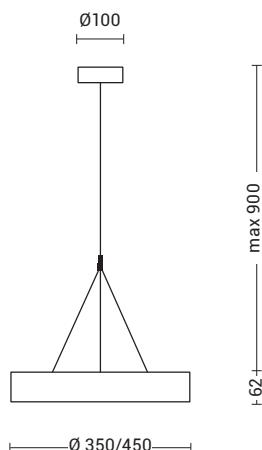


Articolo dotato di switch per la scelta della temperatura colore (2700K-3000K-4000K)

Article with switch to select the gradations (2700K-3000K-4000K)



|            | Codice<br>Code | CCT             | Flusso lm<br>Flux lm | Potenza<br>Wattage | Dimensioni mm<br>Dimensions mm |
|------------|----------------|-----------------|----------------------|--------------------|--------------------------------|
| <i>new</i> | <b>PLT003B</b> | 2700-3000-4000K | 1425                 | 15W                | Ø200 x 54                      |
| <i>new</i> | <b>PLT004B</b> | 2700-3000-4000K | 2700                 | 30W                | Ø350 x 62                      |
| <i>new</i> | <b>PLT005B</b> | 2700-3000-4000K | 4400                 | 40W                | Ø450 x 62                      |

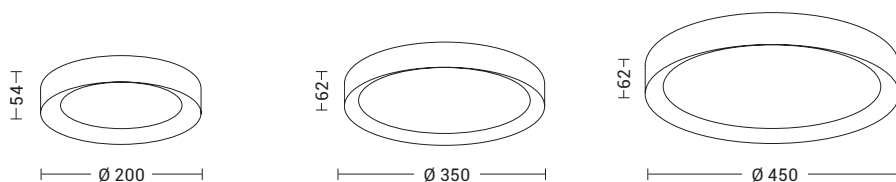

Articolo dotato di switch per la scelta della temperatura colore (2700K-3000K-4000K)

Article with switch to select the gradations (2700K-3000K-4000K)

Dotato di cavo di sicurezza in acciaio anticaduta  
Equipped with a steel safety cable



## Finiture Finishes



Bianco White