



Potenza.
Power.

STREET



New



Faretto LED da incasso a soffitto per esterno versatile, potente ed efficiente per creare accattivanti giochi di luce e garantire nel contempo un sufficiente livello di illuminamento per la fruizione degli spazi. Struttura in pressofusione di alluminio con polveri poliestere ad elevata resistenza ai raggi ultravioletti e alla corrosione. Alimentatore LED incluso da installare in remoto.

Disponibile nella versione bianca e in tre dimensioni e relative potenze per soddisfare scelte progettuali diverse. Disponibili giunti IP68 per connessioni elettriche sicure, durevoli e con barriera anticondensa.

Outdoor ceiling recessed downlight LED versatile, powerful and efficient to create attractive light effects and at the same time ensure a sufficient level of illumination for the use of spaces. Die-cast aluminium structure with polyester powders, highly resistant to UV rays and corrosion. Remote LED driver supplied.

Available in white finish and in three sizes and related powers to meet different design choices. IP68 linear connectors for moisture protection and anticondensation linear joints are available.

STREET



New



30°

LED ▲36° CRI≥90 UGR≤13 IP65/20



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
STE001B	3000K	480	4W	Ø40 x 85

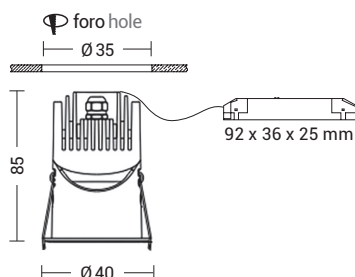

30°

LED ▲36° CRI≥90 UGR≤13 IP65/20



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
STE002B	3000K	1000	8W	Ø62 x 77

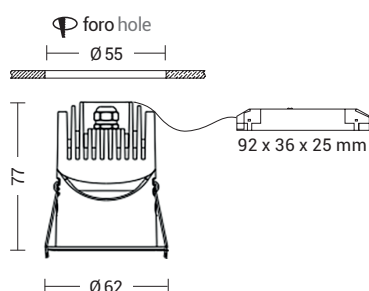

30°

LED ▲36° CRI≥90 UGR≤13 IP65/20

Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
STE003B	3000K	1200	10W	Ø73 x 80

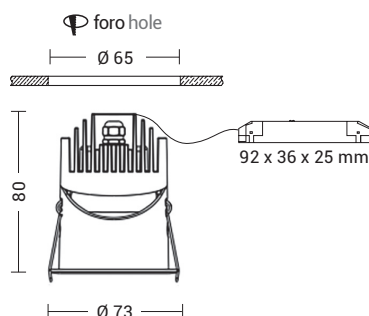

Finiture Finishes



Bianco White

Accessori Accessories



connessione IP68
IP68 connection

p.897



MT.2 - MT.3
cassaforma per
muratura per
casting box for
STE001B - STE002B
p.896