

TOP

Faretto ad incasso tondo 12V, con attacco GU5,3 che consente di montare lampadina LED.


Struttura in alluminio tornito e diffusore in vetro trasparente. Disponibile in due finiture (bianco e alluminio satinato). In virtù del grado di protezione IP54, può essere installato anche in esterno e in ambienti con elevata umidità (bagni).

Necessita di alimentatore da installare in remoto. Cassaforma per installazione in muratura da ordinare come accessorio.

12V round downlight with GU5,3 lamp holder that allows mounting the LED.

Turned aluminium body and clear glass diffuser. Available in two finishes (white and satin aluminium). Thanks to its IP54 protection degree it is suitable for outdoor installation and in high-humidity environments (bathrooms).

Remote driver to be ordered separately. Casting box available as accessory to be ordered separately.

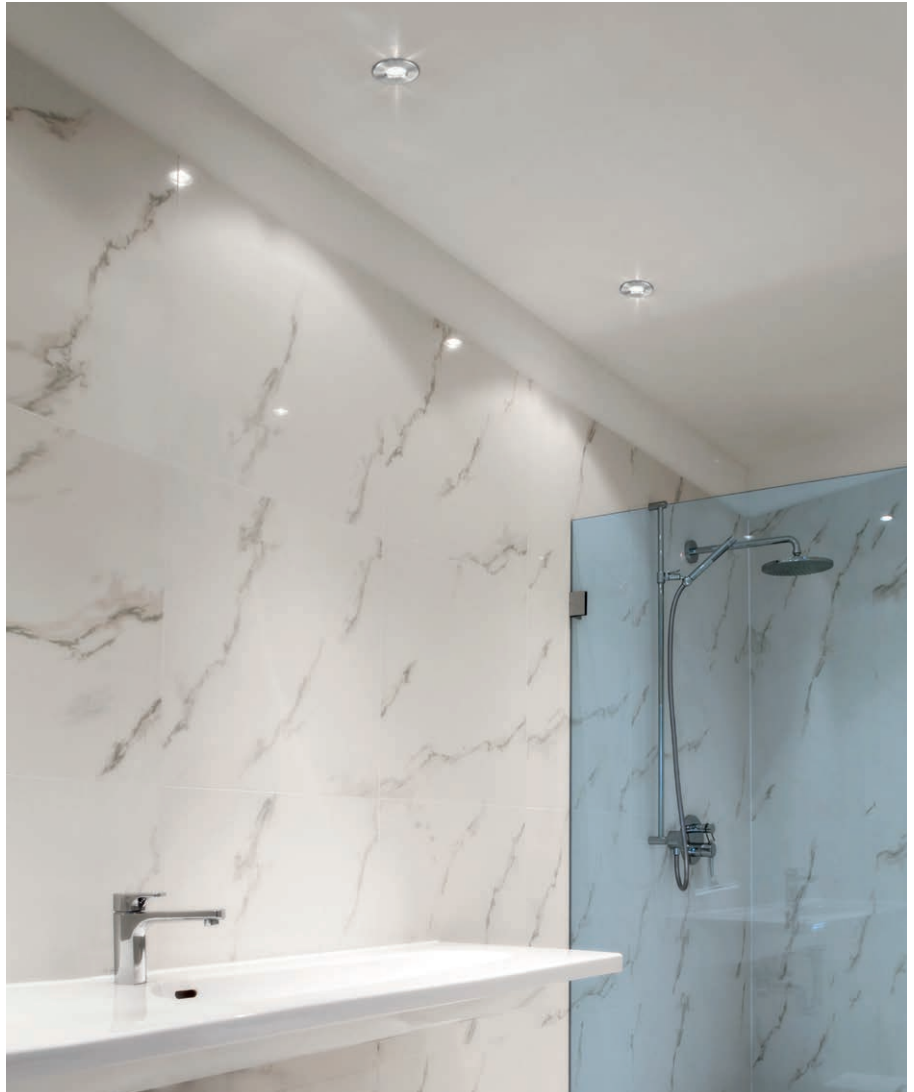

Codice
Code



GU5,3

Potenza
Wattage

1x50W max


Dimensioni mm
Dimensions mm

Ø80 x 25

TOP001XX

Φ foro hole

— Ø 70 —



Finiture Finishes




B



AL

Accessori Accessories



alimentatore 12V
12V driver

p.883



MT.2 - MT.3
cassaforma per
muratura
casting box

p.896



modulo COB
LED
COB LED unit

p.884