



TORCH

Apparecchio LED 48V per esterno (IP65), applicabile a terra con apposito picchetto in dotazione.

Struttura in acciaio INOX anticorrosione (AISI316) ad elevata resistenza ai raggi ultravioletti e alla corrosione.

Alimentatore LED da ordinare separatamente e da installare in remoto. Disponibili giunti certificati IP68 per la realizzazione delle connessioni elettriche, sicure, durevoli e con barriera anticondensa.

Outdoor (IP65) 48V LED floodlight luminaire, suitable for floor mounting with supplied spike.

Anti-corrosion and anti-UV (AISI316) stainless steel body.


Remote driver as accessory to be ordered separately.

IP68 linear connectors for moisture protection and anti-condensation linear joints are available.



AISI316 LED 93° 48V CRI≥80 IP65

Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
TOR001	3000K	230	2,1W	Ø25 x 900

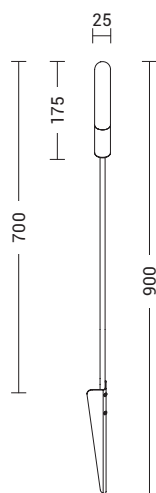

Finiture Finishes




Acciaio AISI316 Stainless steel AISI316

Accessori Accessories



connessione IP68
IP68 connection

p.897



TS.807
alimentatore LED
LED driver

p.880