



ZAGAT

Paletto LED da terra per esterno (IP54) con alimentatore integrato.

Struttura in pressofusione di alluminio verniciato con polveri poliestere a elevata resistenza ai raggi ultravioletti e alla corrosione, diffusore in policarbonato.

Disponibile in due finiture (antracite e grigio) e due temperature colore (3000K e 4000K).

Disponibili giunti certificati IP68 per la realizzazione delle connessioni elettriche, sicure, durevoli e con barriera anticondensa.

Outdoor (IP54) LED bollard with integrated LED driver.

Die-cast aluminium body, painted with polyester powders, highly resistant to UV rays and corrosion, polycarbonate diffuser.



Available in two finishes (anthracite and grey) and in two gradations (3000K and 4000K).

IP68 linear connectors for moisture protection and anti-condensation linear joints are available.



LED ▲ 38° CRI≥80 IP54

Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
ZAG002XX	3000K	807	9W	110 x 110 x 650
ZAG004XX	4000K	850	9W	110 x 110 x 650

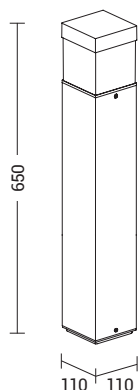

Finiture Finishes



GR



AN

Accessori Accessories

connessione IP68
IP68 connection



p.897