



# GLIMMER





La struttura in pressofusione di alluminio verniciata con polveri poliestere a elevata resistenza ai raggi ultravioletti e alla corrosione, e il diffusore in vetro temprato garantiscono affidabilità nel tempo.

The die-cast aluminium structure, powder-coated with polyester paint for high resistance to UV rays and corrosion, together with the tempered glass diffuser, ensures long-term reliability.

## SEGNA IL PERCORSO CON STILE


### MARK THE PATH WITH STYLE

Glimmer è il segnapasso da incasso che unisce sicurezza e atmosfera. Una lama di luce LED discreta ma presente, ideale per scale, corridoi, ingressi e percorsi esterni.

Disponibile in bianco e nero, Glimmer gioca sui contrasti per integrarsi in ogni progetto.

Glimmer is a recessed step light that combines safety with atmosphere. A discreet yet present LED blade of light, ideal for stairs, corridors, entrances and outdoor pathways.

Available in white and black, Glimmer plays with contrasts to integrate seamlessly into any project.

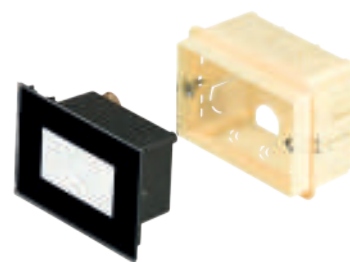

Incasso in muratura o cartongesso con scatola 503; adatto sia ad ambienti interni che esterni, IP66/20.

Cassaforma in dotazione, alimentatore LED integrato e giunti IP68 opzionali per connessioni sicure e con barriera anticondensa.

Recessed installation in masonry or plasterboard using a 503 back box; suitable for both indoor and outdoor environments, IP66/20.



Supplied with installation housing, integrated LED driver, and optional IP68 connectors for secure electrical connections with an anti-condensation barrier.

# GLIMMER

## OTTICA SIMMETRICA SYMMETRIC OPTICS



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
<b>GLI001XX</b>	3000K-4000K-6000K	320	4,5W	115 x 81 x 50




da installare con scatola 503  
to be installed with box 503

## OTTICA ASIMMETRICA ASYMMETRIC OPTICS



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
<b>GLI001XXAS</b>	3000K-4000K-6000K	320	4,5W	115 x 81 x 50



da installare con scatola 503  
to be installed with box 503



Switch per temperatura colore (3000K-4000K-6000K)  
Colour temperature switch (3000K-4000K-6000K)

3000K 4000K 6000K



### Finiture Finishes



B



N

### Accessori Accessories



connessione IP68  
IP68 connection

p.945