



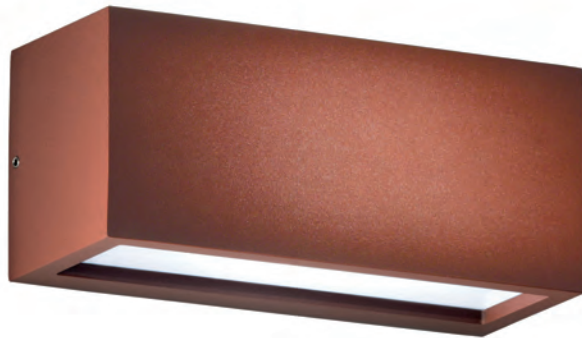

Apparecchio biemissione a parete per esterno IP65 a LED o con attacco E27 che consente di montare lampadina LED. Struttura in pressofusione di alluminio con diffusore in policarbonato, verniciata con polveri poliestere a elevata resistenza ai raggi ultravioletti e alla corrosione.

IP65 outdoor wall luminaire with direct-indirect light emission. Available in LED version and with E27 lamp holder that allows mounting the LED lamp. Die-cast aluminium body with polycarbonate diffuser, painted with polyester powders, highly resistant to UV rays and corrosion.

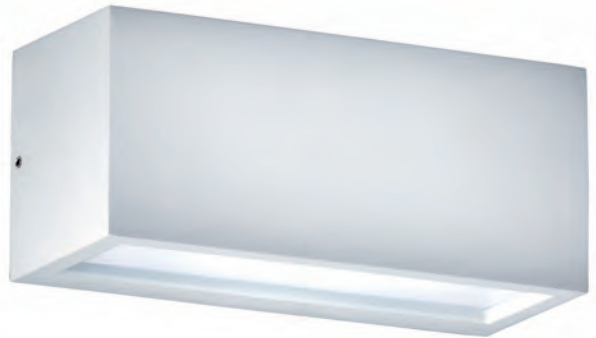

Luce impeccabile.
Perfect light.



GUAVA







Alimentatore LED integrato. Disponibile in quattro finiture - bianco, grigio, antracite e marrone - e nella versione LED in due temperature colore, 3000K e 4000K.


Integrated LED driver. Available in four finishes (white, grey, anthracite and brown) and in the LED version in two gradations, 3000K and 4000K.


GUAVA



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
GUA001XX	3000K	1750	12W	247 x 118 x 100
GUA002XX	4000K	1850	12W	247 x 118 x 100



Codice Code		Potenza Wattage	Dimensioni mm Dimensions mm
GUA003XX	E27	1x15W LED max	247 x 118 x 100



Finiture Finishes



B

GR

AN

MA