



LARS

Paletto LED da terra per esterno IP65, struttura in pressofusione di alluminio, verniciato con polveri poliestere ad elevata resistenza ai raggi ultravioletti e alla corrosione.

Diffusore in policarbonato con griglia frangiluce. Alimentatore LED integrato.

Disponibile in due altezze, due finiture - antracite, grigio - e due temperature colore, 3000K e 4000K.

Disponibili giunti certificati IP68 per la realizzazione delle connessioni elettriche, sicure, durevoli e con barriera anticorrosione.

IP65 outdoor LED bollard in die-cast aluminium body, painted with polyester powders, highly resistant to UV rays and corrosion.



Polycarbonate diffuser with antiglare grid. Integrated LED driver.

Available in two heights, two finishes - anthracite, grey - and in two gradations, 3000K and 4000K.

IP68 linear connectors for moisture protection and anti-condensation linear joints are available.



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
LAR001XX	3000K	1308	15W	Ø120 x 265
LAR003XX	4000K	1407	15W	Ø120 x 265
LAR002XX	3000K	1308	15W	Ø120 x 650
LAR004XX	4000K	1407	15W	Ø120 x 650

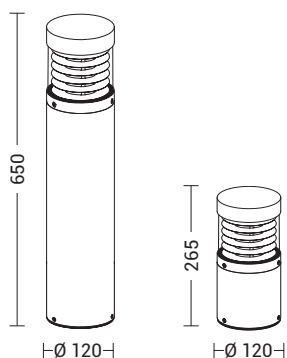

Finiture Finishes



GR



AN

Accessori Accessories



connessione IP68
IP68 connection

p.945