



Faretto ad incasso proposto a LED 3W, 3000K e a 12V con attacco G4.

Struttura in metallo e diffusore in vetro satinato. In virtù del ridotto spessore è consigliato per spazi ristretti.

Disponibile in quattro finiture, bianco, cromo, nero ed oro lucido.

Versione LED con ottima resa cromatica $CRI \geq 85$ e corredata di alimentatore da installare in remoto. La versione 12V necessita di alimentatore da installare in remoto. Cassaforma per installazione in muratura da ordinare come accessorio.

Downlight available in LED version 3W, 3000K and 12V version G4 lamp holder.

Metal body and satin glass diffuser.

Thanks to its reduced depth, it is ideal for narrow spaces.


Available in four finishes, white, chrome, black, and polished gold. LED version has an excellent colour rendering $CRI \geq 85$. Remote LED driver supplied, 12V remote driver to be ordered separately.

Casting box available as accessory to be ordered separately.


NET



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
5120-XX-LED	3000K	255	3W	Ø65 x 22

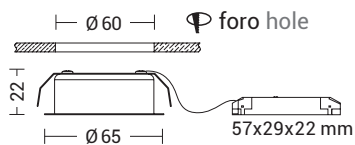

Codice Code		Potenza Wattage	Dimensioni mm Dimensions mm
5120-XX	G4	1x20W max	Ø65 x 22

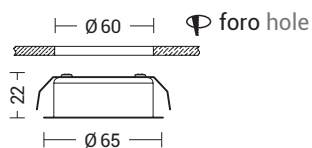

Finiture Finishes



Accessori Accessories

