




Apparecchio a parete per esterno IP65 a LED o con attacco E27 che consente di montare lampadine LED. Disponibile nella versione monoemissione e biemissione. Struttura in pressofusione di alluminio verniciato con polveri poliestere ad elevata resistenza ai raggi ultravioletti e alla corrosione, diffusore in vetro temperato. Proposta in tre finiture, bianco, grigio e antracite. Versione LED con fascio di luce 120°, alimentatore LED integrato e con due temperature colore selezionabili tramite switch 3000K-4000K. Dotato di doppio passacavo per collegamento ENTRATA- USCITA.

LED outdoor IP65 wall luminaire or with E27 lamp holder that allows mounting the LED lamp. Available in direct and direct/indirect light emission. Die-cast aluminum painted with polyester powders body with a very compact and elegant line, with high resistance to UV rays and corrosion, tempered glass diffuser. Three finishes, white, grey and anthracite. LED version with light beam 120°, integrated LED driver and two gradations selectable by switch 3000K-4000K. Equipped with double cable gland for INPUT-OUTPUT connection.

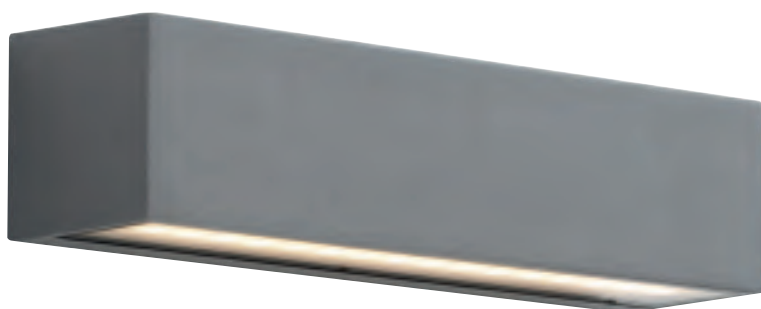

OUTDOOR Total Look

WILLY







WILLY

MONOEMISSIONE DIRECT LIGHT





Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
WIL001XX	3000K-4000K	700	7W	250 x 60 x 60



BIEMISSIONE DIRECT-INDIRECT LIGHT




Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
WIL002XX	3000K-4000K	1400	15W	250 x 60 x 60




BIEMISSIONE DIRECT-INDIRECT LIGHT



Codice Code		Potenza Wattage	Dimensioni mm Dimensions mm
WIL003XX	E27	2x15W LED max	380 x 85 x 75



Switch per temperatura colore (3000K-4000K)
Colour temperature switch (3000K-4000K)



3000K ↔ 4000K

Finiture Finishes



B



GR



AN