


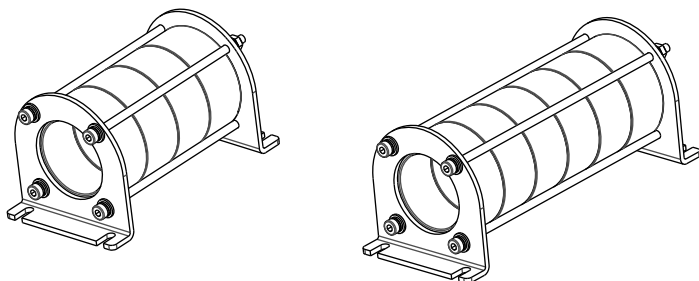

NHA9618201

 **DANGER****HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH**

- Only appropriately trained persons who are familiar with and fully understand the contents of the present manual and all other pertinent product documentation and who have received all necessary training to recognize and avoid hazards involved are authorized to work on and with this equipment.
- Installation, adjustment, repair, and maintenance must be performed by qualified personnel.
- Verify compliance with all local and national electrical code requirements as well as all other applicable regulations with respect to grounding of all equipment.
- Before performing work and/or applying voltage on the equipment, follow the instructions given in the appropriate installation manual.

Failure to follow these instructions will result in death or serious injury.

 CAUTION**SHARP EDGES**

Use all necessary personal protective equipment (PPE) such as gloves when performing any type of work whatsoever on or with this product.

Failure to follow these instructions can result in injury or equipment damage.

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this product. © 2024 Schneider Electric. All Rights Reserved.

⚠ DANGER

RISK OF FIRE

Before installing the product, verify that all cardboard and other packaging material have been completely removed from the product.

Failure to follow these instructions will result in death or serious injury.



The metal surfaces of the product may reach 75°C (167°F) during operation.

⚠ WARNING

HOT SURFACES

- Ensure that any contact with hot surfaces is avoided.
- Do not allow flammable or heat-sensitive parts in the immediate vicinity of hot surfaces.
- Verify that the heat dissipation is sufficient by performing a test run under maximum load conditions.

Failure to follow these instructions can result in death, serious injury, or equipment damage.

NOTE: If the temperature of the common mode filter is above 75°C, you should:

- Add a common mode filter in series
- Use cable with lower capacitance
- Reduce the cable length
- Strengthen ventilation on the common mode filter



MANUFACTURER
Schneider Electric Industries SAS
35 rue Joseph Monier
Rueil Malmaison 92500 France


UK REPRESENTATIVE
Schneider Electric Limited
Stafford Park 5
Telford, TF3 3BL United Kingdom



Опция для продуктов Altivar и Altistart.
Пожалуйста, обратитесь к сообщению о преобразователе частоты EAC / программном сартере в приложении к началу работы, размещенном на веб-сайте производителя.


Авторизованный поставщик в Республике Казахстан:
ООО «Шнейдер Электрик»
Адрес: 050010, РК, г. Алматы, пр. Достык, 38, бизнес-центр «Кен Дала», 5 этаж, левое крыло.
Тел.: +7 (727) 339 23 57
Номер службы поддержки клиентов:
Тел.: +7 (727) 339 24 52

Altivar және Altistart өніміне арналған опция.
Өндірушінің веб-сайтында орналастырылған «Жұмысқа кірісу» қосымшасындағы EAC жиілік инвертер / бірқалыпты іске қосу құрылғысы хабарламасына сілтеме жасауыңызды сұраймыз.
Қазақстан Республикасындағы уәкілетті жеткізуші:
ЖШС «Шнейдер Электрик»
Мекен-жайы: 050010, ҚР, Алматы қаласы, Достық даңғылы, 38, «Кең дала» бизнес орталығы, 5-қабат, сол қанат.
тел.: +7 (727) 339 23 57
Клиенттерге қызмет көрсету нөмірі:
тел.: +7 (727) 339 24 52

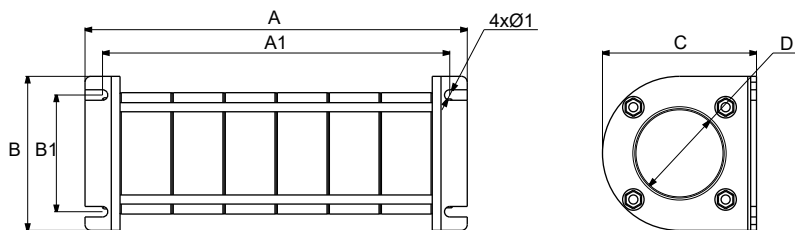

	A		B		A1		B1		Ø1	
	mm	in	mm	in	mm	in	mm	in	mm	in
VW3A5501	119.2	4.7	66	2.6	104.2	4.1	50	2.0	4.5	0.18
VW3A5502	163.8	6.4	66	2.6	148.8	5.9	50	2.0	4.5	0.18

	C		D	
	mm	in	mm	in
VW3A5501	66	2.6	37.1	1.5
VW3A5502	66	2.6	37.1	1.5

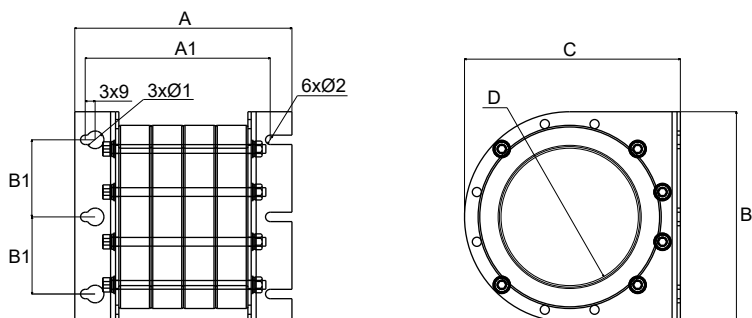

	A		A1		B1		Ø1		Ø2	
	mm	in	mm	in	mm	in	mm	in	mm	in
VW3A5503	160	6.3	137	5.1	45	1.8	13	0.5	6.5	0.26
VW3A5504	210	8.3	187	7.1	45	1.8	13	0.5	6.5	0.26
VW3A5505	197.2	7.8	167.8	6.3	70	2.8	16	0.6	8.5	0.33
VW3A5506	255.8	10.1	226.4	8.5	70	2.8	16	0.6	8.5	0.33

	B		C		D	
	mm	in	mm	in	mm	in
VW3A5503	127.5	5.0	127.5	5.0	75	3.0
VW3A5504	127.5	5.0	127.5	5.0	75	3.0
VW3A5505	191	7.5	196	7.7	123.9	4.9
VW3A5506	191	7.5	196	7.7	123.9	4.9

