

Scheda dati

Specifiche



Interruttore automatico magnetotermico a pulsanti, TeSys, GV2ME, 1,6-2,5A viti serrafilo

GV2ME07

Prezzo: 91,65 EUR

Presentazione

Gamma	TeSys Deca
Nome Prodotto	TeSys GV2
Tipo Prodotto	Interruttore automatico
Nome Dispositivo	GV2ME
Applicazione	Protezione motore
Tecnologia sganciatore	Magnetotermico

Caratteristiche tecniche

Numero di poli	3P
Tipo di rete	CA
Categoria di utilizzazione	Categoria A conforme a IEC 60947-2 AC-3 conforme a IEC 60947-4-1 AC-3e conforme a IEC 60947-4-1
Frequenza di rete	50/60 Hz conforme a IEC 60947-2
Potenza motore in kW	0,75 kW a 400/415 V CA 50/60 Hz 1,1 kW a 500 V CA 50/60 Hz 1,5 kW a 690 V CA 50/60 Hz
Potere di interruzione	100 kA Icu conforme a IEC 60947-2 a 230/240 V CA 50/60 Hz 100 kA Icu conforme a IEC 60947-2 a 400/415 V CA 50/60 Hz 100 kA Icu conforme a IEC 60947-2 a 440 V CA 50/60 Hz 100 kA Icu conforme a IEC 60947-2 a 500 V CA 50/60 Hz 3 kA Icu conforme a IEC 60947-2 a 690 V CA 50/60 Hz
Potere di interruzione di servizio nominale [Ics]	100 % conforme a IEC 60947-2 a 230/240 V CA 50/60 Hz 100 % conforme a IEC 60947-2 a 400/415 V CA 50/60 Hz 100 % conforme a IEC 60947-2 a 440 V CA 50/60 Hz 100 % conforme a IEC 60947-2 a 500 V CA 50/60 Hz 75 % conforme a IEC 60947-2 a 690 V CA 50/60 Hz
Tipo di controllo	Pulsante
Corrente nominale [In]	2,5 A
campo di regolazione protezione termica	1,6...2,5 A conforme a IEC 60947-2
Corrente di sgancio magnetico	39 A
Corrente termica convenzionale in aria [Ith]	2,5 A conforme a IEC 60947-2
Tensione nominale di impiego [Ue]	690 V CA 50/60 Hz conforme a IEC 60947-2
Tensione nominale di isolamento [Ui]	690 V CA 50/60 Hz conforme a IEC 60947-2
Tensione nominale di tenuta agli impulsi [Uimp]	6 kV conforme a IEC 60947-2
Sensibilità mancanza di fase	Si conforme a IEC 60947-4-1

Disclaimer: La presente documentazione non ha funzione sostitutiva e non deve essere utilizzata per stabilire l'idoneità o l'affidabilità di questi prodotti per le applicazioni di utenti specifici

Attitudine all'isolamento	Si conforme a IEC 60947-1
Dissipazione energia per polo	2,5 W
Durata meccanica	100000 cicli
Durata elettrica	100000 cicli per AC-3 a 415 V In 100000 cicli per AC-3e a 415 V In
Servizio nominale	Ininterrotto conforme a IEC 60947-4-1
Connessioni - morsetti	Circuito di potenza: morsetto di fissaggio a vite 2 cavi 1...6 mm²solido Circuito di potenza: morsetto di fissaggio a vite 2 cavi 1,5...6 mm²flessibile senza terminazione cavo Circuito di potenza: morsetto di fissaggio a vite 2 cavi 1...4 mm²flessibile con terminazione cavo
coppia di serraggio	1,7 Nm - su morsetto di fissaggio a vite
Tipologia fissaggio	Guida DIN simmetrica 35 mm: agganciato Pannello: avvitato (con piastra di adattamento)
Posizione Di Montaggio	Orizzontale Verticale
Larghezza	45 mm
Altezza	89 mm
Profondità	78,5 mm
Peso Netto	0,26 kg
Colore	Grigio scuro

Ambiente

norme di riferimento	EN/IEC 60947-2 EN/IEC 60947-4-1 UL 60947-4-1 CSA C22.2 No 60947-4-1 IEC/EN 60335-2-40:Annex JJ IEC/EN 60335-1:Clause 30.2
Certificazioni Prodotto	CCC UL CSA EAC ATEX LROS (Lloyds Register of shipping) BV RINA DNV-GL UKCA
Grado di protezione IK	IK04
Grado Di Protezione Ip	IP20 conforme a CEI 60529
tenuta climatica	conforme a IACS E10
Temperatura Di Stoccaggio	-40...80 °C
Resistenza Al Fuoco	960 °C conforme a IEC 60695-2-11
Temperatura Ambiente	-20...60 °C
Robustezza meccanica	Urti: 30 Gn per 11 ms Vibrazioni: 5 gn, 5...150 Hz
Altitudine di funzionamento	= 2000 m

Confezionamenti

Unità di misura confezione 1	PCE
Num.unità in pkg.	1

Confezione 1: altezza	4,500 cm
Confezione 1: larghezza	8,500 cm
Confezione 1: profondità	9,500 cm
Peso imballo (Kg)	257,000 g
Unità di misura confezione 2	S02
Numero di unità per confezione 2	24
Confezione 2: altezza	15,000 cm
Confezione 2: larghezza	30,000 cm
Confezione 2: profondità	40,000 cm
Confezione 2: peso	6,353 kg
Unità di misura confezione 3	P06
Numero di unità per confezione 3	384
Confezione 3: altezza	75,000 cm
Confezione 3: larghezza	80,000 cm
Confezione 3: profondità	60,000 cm
Confezione 3: peso	109,648 kg

Garanzia contrattuale

Garanzia (in mesi)	18
--------------------	----

L'obiettivo di Schneider Electric è raggiungere lo status di Net Zero entro il 2050 attraverso partnership nella supply chain, materiali a basso impatto e circolarità, grazie alla nostra campagna "Use Better, Use Longer, Use Again" (Usa meglio, usa più a lungo, utilizza di nuovo), per prolungare la durata dei prodotti e la riciclabilità.

[Spiegazione dei Environmental Data](#) >

[Come valutiamo la sostenibilità dei prodotti](#) >

Impronta ambientale	
Impronta di carbonio totale del ciclo di vita	43
Informazioni ambientali	Profilo ambientale del prodotto

Use Better

Materiali e imballaggio	
Confezione di cartone riciclato	Sì
Imballaggio senza plastica	No
Direttiva RoHS UE	Conforme alle esenzioni
Numero SCIP	04104e70-ba29-493c-b2cc-b5837d1f879b
Regolamento REACH	Dichiarazione REACH

Use Again

Reimballaggio e rifabbricazione	
Profilo di circolarità	Informazioni sulla fine della vita
Ritiro del prodotto	No
Etichetta RAEE	 Nei mercati dell'Unione Europea il prodotto deve essere smaltito in base a un metodo differenziato specifico e non tra i normali rifiuti.

Performance Curves

Thermal-Magnetic Tripping Curves for GV2ME and GV2P
Average Operating Times at 20 °C Related to Multiples of the Setting Current



- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state

Current Limitation on Short-Circuit for GV2ME and GV2P (3-Phase 400/415 V)

Dynamic Stress

I peak = f (prospective Isc) at 1.05 Ue = 435 V



- 1 Maximum peak current
- 2 24-32 A
- 3 20-25 A
- 4 17-23 A
- 5 13-18 A
- 6 9-14 A
- 7 6-10 A
- 8 4-6.3 A
- 9 2.5-4 A
- 10 1.6-2.5 A
- 11 1-1.6 A
- 12 Limit of rated ultimate breaking capacity on short-circuit of GV2ME (14, 18, 23, and 25 A ratings).

Thermal Limit on Short-Circuit for GV2ME

Thermal Limit in kA^2s in the Magnetic Operating Zone

Sum of $I^2dt = f$ (prospective Isc) at 1.05 Ue = 435 V



- 1 24-32 A
- 2 20-25 A
- 3 17-23 A
- 4 13-18 A
- 5 9-14 A
- 6 6-10 A
- 7 4-6.3 A
- 8 2.5-4 A
- 9 1.6-2.5 A
- 10 1-1.6 A

Dimensions Drawings

Dimension

GV2ME



(1) Maximum


X1 Electrical clearance = 40 mm for $U_e \leq 690$ V

	b
GV2ME●●	89
GV2ME●●3	101

Mounting

GV2ME


On 35 mm rail



c = 78.5 on AM1 DP200 (35 x 7.5)


c = 86 on AM1 DE200, ED200 (35 x 15)

On panel with adapter plate GV2AF02

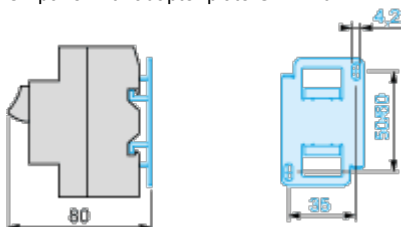

On pre-slotted plate AM1 PA


AF1 EA4



On rails DZ5 MB201


Scheda dati

GV2ME07




GV2AF01

Combination GV2ME + TeSys k contactor

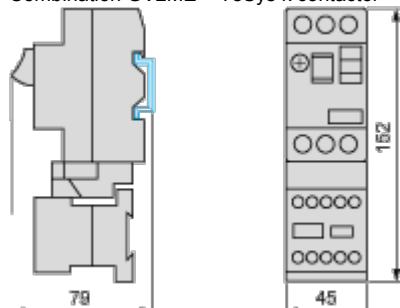

GV2AF3

Combination GV2ME + TeSys d contactor

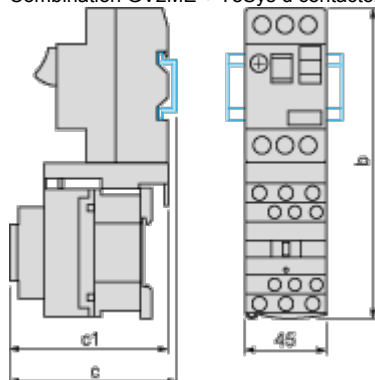

GV2ME +	LC1D09...D18	LC1D25 and D32
b	176.4	186.8
c1	94.1	100.4
c	99.6	105.9


GV2AF4 + LAD311

Combination GV2ME + TeSys d contactor



GV2ME +	LC1D09...D18	LC1D25 and D32
b	176.4	186.8
c1	103.1	136.4
c	135.6	141.9
d1	107	107
d	112.5	112.5

GV2ME + GV1L3 (Current Limiter)

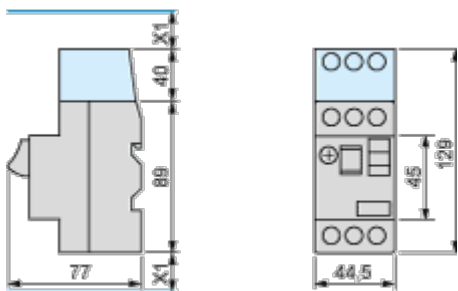

X1 = 10 mm for Ue = 230 V or 30 mm for 230 V < Ue ≤ 690 V

Connections and Schema

GV2ME•• and GV2RT



Connection of Undervoltage Trip for Dangerous Machines (Conforming to INRS) on GV2ME Only



Technical Illustration

Wiring diagram



REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Offer Marketing Illustration

Product benefits / Features

TeSys Deca

Motor Circuit Breakers

GV2ME07



The image shows a TeSys Deca GV2ME07 Motor Circuit Breaker. It is a black, three-pole device with a red handle in the 'OFF' position. The handle has 'ON', 'STOP', and 'START' markings. A QR code is visible on the front panel. The top terminals are labeled 1L1, 3L2, and 5L3. The bottom terminals are labeled 2T1, 4T2, and 6T3.

Number of poles

3P

Network type

AC

Network frequency

50/60Hz

Trip unit

Thermal-magnetic

Thermal protection adjustment range

1.6-2.5A

Breaking capacity

100 kA Icu

Offer Marketing Illustration

Product benefits / Features



TeSys Deca Motor
Circuit Breakers

Range Accessories



Energy Sensor



Mounting and adapters



Terminal block



Combination block



Motor starter
adapter plate



Current limiter



Comb busbar



Auxiliary
contact blocks

Offer Marketing Illustration

Product benefits / Features

TeSys Deca

Motor Circuit Breakers



A black TeSys Deca Motor Circuit Breaker with a red handle and a green Schneider logo at the bottom.



Universal Integration
Can be used for all type of applications across industry, infrastructure and buildings.



Complete protection
Provide short circuit protection, overload protection, motor (ON/OFF) control, all in a single product.



Standard Sync
Compliant to motor control and protection, in accordance with standards.

10 dic 2025

Life Is On | Schneider Electric

15

Offer Marketing Illustration

Product benefits / Features



The image shows a TeSys Deca Motor Circuit Breaker, a black rectangular device with a red handle. It has three screw terminals at the top labeled 1, 2, and 3, and three at the bottom labeled 2, 4, and 6. The front panel features a red handle with 'ON' and 'OFF' markings, a 'RESET' button, and a 'STOP' button. A QR code is visible on the front panel. The device is set against a green circular background.

TeSys Deca Motor Circuit Breakers

Technical Benefits

- High breaking capacity up to 100 kA.
- Screw clamp for the connection, with lug and spring terminals.
- Easily identify the tripped breaker.
- Padlockable in all versions.
- Sealable thermal overload settings without additional accessories.
- Short circuit indication for better diagnostics when a trip occurs.
- Maximum 15 current ratings to cover from 0.1 A to 32 A motor current with a IP20 level for finger safety.

Offer Marketing Illustration

Product benefits / Features



TeSys Deca Motor
Circuit Breakers

Range Accessories




Energy Sensor



Mounting and adapters



Terminal block



Combination block



Motor starter
adapter plate



Current limiter



Comb busbar



Auxiliary
contact blocks

Offer Marketing Illustration

Product benefits / Features



The image shows a TeSys Deca Motor Circuit Breaker, a black rectangular device with a red handle and a green button. It has three screw terminals at the top labeled 1, 2, and 3, and three at the bottom labeled 2, 4, and 6. A digital display on the front shows '18.23A' and '100kA'. A QR code is visible on the front panel. The device is set against a green circular background.

TeSys Deca Motor Circuit Breakers

Technical Benefits

- High breaking capacity up to 100 kA.
- Screw clamp for the connection, with lug and spring terminals.
- Easily identify the tripped breaker.
- Padlockable in all versions.
- Sealable thermal overload settings without additional accessories.
- Short circuit indication for better diagnostics when a trip occurs.
- Maximum 15 current ratings to cover from 0.1 A to 32 A motor current with a IP20 level for finger safety.

Offer Marketing Illustration

Product benefits / Features

TeSys Deca

Motor Circuit Breakers



Universal Integration
Can be used for all type of applications across industry, infrastructure and buildings.



Complete protection
Provide short circuit protection, overload protection, motor (ON/OFF) control, all in a single product.



Standard Sync
Compliant to motor control and protection, in accordance with standards.



Image of product / Alternate images

Alternative

