

Catalog V2.12 - 19 December 2024

Multistandard protection for OEM applications

se.com

Life Is On Schneider

Multistandard circuit protection for OEM

About the Book

Legal information

The information provided in this Catalog contains description of Schneider Electric products, solutions and services ("Offer") with technical specifications and technical characteristics of the performance of the corresponding Offer.

The content of this document is subject to revision at any time without notice due to continued progress in methodology, design and manufacturing.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any type of damages arising out of or in connection with (i) informational content of this Catalog not conforming with or exceeding the technical specifications, or (ii) any error contained in this Catalog, or (iii) any use, decision, act or omission made or taken on basis of or in reliance on any information contained or referred to in this Catalog.

SCHNEIDER ELECTRIC MAKES NO WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO WHETHER THIS CATALOG OR ANY INFORMATION CONTAINED THEREIN SUCH AS PRODUCTS AND SERVICES WILL MEET REQUIREMENTS, EXPECTATIONS OR PURPOSE OF ANY PERSON MAKING USE THEREOF.


Schneider Electric brand and any trademarks of Schneider Electric and its subsidiaries referred to in this Catalog are property of Schneider Electric or its subsidiaries. All other brands are trademarks of their respective owners.

This Catalog and its content are protected under applicable copyright laws and provided for informative use only. No part of this Catalog may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Copyright, intellectual, and all other proprietary rights in the content of this Catalog (including but not limited to software, audio, video, text, and photographs) rests with Schneider Electric or its licensors. All rights in such content not expressly granted herein are reserved. No rights of any kind are licensed or assigned or shall otherwise pass to persons accessing this information.

Trademarks

QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries.

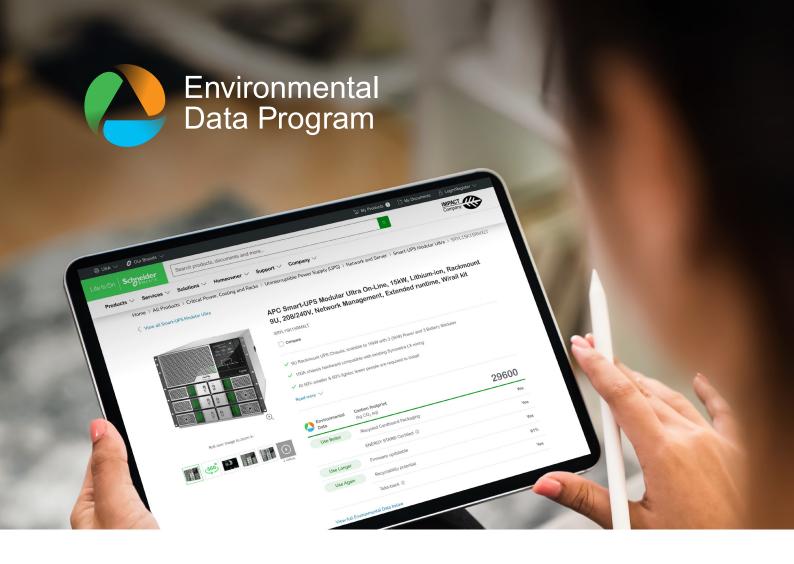


Next-level transparency for better-informed product choices

The Environmental Data Program is a framework for how we measure, categorize, and compare the environmental attributes and footprint of our products.

Using a rigorous, fact-based methodology, the program provides environmental data from across the product lifecycle.

Five data categories across the product lifecycle

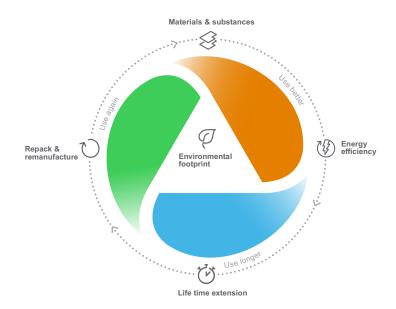

Use Better: How sustainable a product is, including environmental footprint, materials and substances, packaging, and energy efficiency.

Use Longer: How a product's life time can be effectively extended in terms of repairability and updatability.

Use Again: How a product can be reused, from dismantling and remanufacturing to recyclability and manufacturer take back.

With this transparent, verified data, customers and partners are empowered to make conscious environmental choices and accurately evaluate and report on sustainability performance.

All our hardware offers have an associated environmental data available on se.com product pages.



Learn more about the Environmental Data Program



A comprehensive range for enhanced protection against electrical threats.

Multi9™ is a range of DIN rail modular devices, a solution offering great performance. Multi9 range is built to meet the major standards for industry applications. Designed to meet your needs for most types of machines, it offers a wide range of modular devices providing protection, signalling functions and accessories.

Renowned quality


World leader's proven technology and experience.

Available worldwide

Sold under the same commercial reference.

Optimized

Small footprint to reduce your panel size, cost effective, less commercial references.

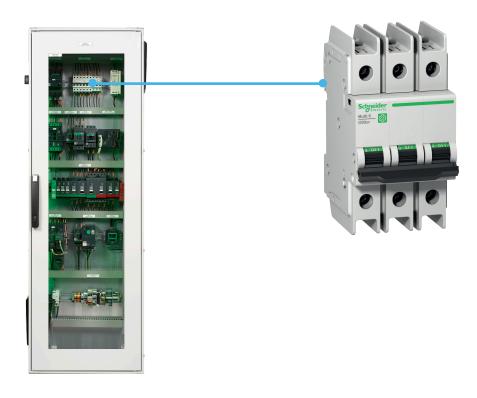



Multi-standard

Multi9 covers all standards for industry application: UL/CSA for North America, IEC, EAC, CCC and others for the rest of the world. It allows a unique panel design



Optimized references which is easy to select

- · Time-saving
- Easy to procure and install
- Meaningful commercial references



Wide range of offers to cover all functions in a control panel

Wide range of solutions that are customized to fit your efficiency and sustainability needs

Multi-standard

Multi9 - range with advanced protection

Designed to offer enhanced protection by preventing and protecting people and equipment from electrical threats such as short circuits, earth leakages, overloads and more.



Miniature Circuit Breakers

Protection against short circuits and overcurrent faults ensuring uninterrupted functionality.

- Ensures no accidental contact with live part – Finger-proof IP-20 terminals
- Avoids false insertion of cables and loose termination with Pull up terminals
- Total Flexibility: Line-Load reversibility
- Low cost with higher performance: Cascading. Cascading charts available From ACB-MCCB-MCB level.
- Reduce Downtime:
 Discrimination.
 Discrimination charts
 available From ACB-MCCB-MCB level
- Easy Installation: Bi connect terminals
- Increased service life: Fast Closing mechanism
- 100% recyclable & recoverable materials.



Residual Current Devices

Reliable protection against earth fault, fire protection and electrocution ensuring people's safety, delivering efficiency and service continuity.

- Easy monitoring: Earth fault indication on front face
- Immunity against nuisance tripping
- New SI RCDs offers enhanced immunity to electrical disturbances and polluted & corrosive environments
- Easy Installation: bi-connect terminals
- Field fittable auxiliaries for advanced protection & monitoring



Surge Protective Devices

Surge protection, harmonic filtering and voltage regulation from home to the data center to industrial environments.

- Affordable An affordable way to protect your infrastructure from potential hazards
- Easy Repair & Replacement

 Surge Protective Devices
 protect your electrical
 devices from burnout and
 expand their lifespan.
- Reduced Maintenance
 Costs Because surge
 Protective Devices limit
 excessive voltage, they can
 protect your appliances,
 HVAC system, and more.
 Thus reducing the number
 of maintenance calls you
 make.



Indication and Tripping Auxiliaries

OF, SD, OF/SD+OF for standard (from 100 mA to 6 A) and advanced (from 2 mA to 100 mA) applications.

- Compliant in harsh environments with low current auxiliaries.
- Optimize your wiring (less wires and wiring time) inside a panel with the daisy chain architecture with low current auxiliaries.
- Monitor up to 100 protective devices (permanently closed) under the daisy chain
- Tripping auxiliaries: MN, MX
- Instantaneous or delayed option: independent of the supply voltage.





Wide range of offers to cover all functions in a Control Panels

Fully compliant with all industry standards, Multi**9** is ideally suited for all types of machine and equipment, providing you not only with protection but plenty of accessories as well as signaling functions.



Time saving



Easy to buy from same vendor and install



Easy coordination



Easy warranty and maintenance



PLC (Programmable Logic Controllers)

Control and monitor industrial operations in a sustainable, flexible, efficient and protected way. Our PLCs and PACs supply edge technology, augmenting it with Ethernet connectivity, built-in cybersecurity, and processing power needed to handle Big Data analysis and protecting against new vulnerabilities among connected industrial assets, across devices or into the cloud.



Push buttons

Ensure robust, ergonomic and easy control of machines and manufacturing lines delivering efficiency and effectiveness.



НМІ

Simple and effective means of connecting systems, collecting data and presenting information. Perform diagnostics, add control and adjust system settings on simple or compact applications from the smallest text display to the most sophisticated industrial PC.



Speed drives

Powerful and reliable combination for your motor control solutions made to the highest quality level to meet your needs in various applications, such as industrial processes, machines or buildings.

Multi9 Range Highlights



C60BP

Miniature circuit breaker for Branch Protection

- UL 489, CSA, IEC and CCC certified,
- UL 489 performances: up to 35 A in 480Y/277V and up to 63 A in 240 V.
- New optimized design and smaller footprint (103 mm / 4,05 in): each references up to 35 A, cover both 480Y/277V and 240 V power supplies,
- In addition to the accessories range, the UL cuttable combs are now available.



C60SP

Miniature Circuit Breaker for Supplementary Protection

- · UL 1077, CSA, IEC and CCC certified
- UL 1077 performances: up to 63A in 480 Y/277 V
- B, C & D curves



C60H-DC

Miniature circuit breaker, "H" breaking capacity for Direct Current applications

- · UL1077, IEC, CCC certified,
- To protect your direct current applications up to 500 V DC
- B, C & K curves



C60BPR

Miniature circuit breaker for Branch Protection with Ring terminal

- UL 489, CSA, IEC and CCC certified,
- UL 489 performances: up to 35 A in 480Y/277V and up to 63 A in 240 V.
- New optimized design and smaller footprint: each references up to 35 A cover both 480Y/277V and 240 V power supplies,
- · Ring tongue terminal ready to wire as delivered open.



C60N/H/L

Miniature Circuit Breaker for IEC zone

- IEC/EN 60947-2 and CCC certified
- Up to 20 kA (440 V)
- B, C & D curves



Vigi C60

Residual Current Device

• IEC/EN 61009-1

Multi9 Range Highlights



Surge Protective Devices

Surge protection, harmonic filtering and voltage regulation from home to the data center to industrial environments.

• UL 1449 4th Edition Recognized, CSA C22.2 No. 269.4-17, 1st Edition





PowerTag Energy is a wireless-communication energy sensor

PowerTag Energy is designed specifically for Energy Management, Load Monitoring and Power Availability applications. Associated to a concentrator or a gateway, PowerTag Energy provides a full wireless class 1 solution to monitor energy at any level of a distribution panel.

Suitable for industrial and machine applications, PowerTag Energy sensor incorporates all features required to perform accurate real-time measurements (U, V, I, P, PF) and energy values up to 160 A.

Advantages:

- Wireless-communication
- Voltage loss alarming
- Class 1 accuracy
- Compact design
- Easy installation and commissioning
- Scalable solution
- · Perfect for retrofit or new panels

See PowerLogic Catalog PLSED309005EN



Click on QR Code or scan to download



1

Multi9

Multistandard circuit protection for OEM

Miniature Circuit Breakers UL/CSA + IEC/EN 60947-2 + GB/T 14048.2 Multi9 C60BP - Z, C, D curves – Tunnel terminals Multi9 C60BPR - Z, C, D curves – Ring-tongue terminals Multi9 C60SP - B, C, D curves – Tunnels terminals Multi9 C60H-DC - B, C, K curves – Tunnels terminals for DC circuits only IEC/EN 60947-2 + GB/T 14048.2 Multi9 C60N - B, C, D curves Multi9 C60H - B, C, D curves Multi9 C60L - C curve Multi9 C60CTRL - Z, C curves – For control circuits protection Multi9 N40N - C curve	12 12 14 16 19 22 24 26 28 30
Residual Current Devices UL + IEC/EN Multi9 GFP - Ground Fault Protector IEC/EN Acti9 iID B-SI type Residual Current Circuit Breakers (RCCB) Acti9 RCCB-ID 125 A Residual Current Circuit Breakers (AC, A, A-SI, B types) IEC/EN Multi9 RCCB ID - Residual Current Circuit Breakers (AC, A-SI types) Multi9 Vigi C60 - Residual Current Devices - Add-on for C60 Multi9 Vigi N40 - Residual Current Devices - Add-on for N40 Multi9 N40 Vigi - Residual Current circuit Breakers with Overcurrent protection	32 32 32 34 34 37 40 40 42 44 46
Surge Protective Devices UL 1449 4th Edition + CSA C22.2 No. 269.4-17 Multi9 PRD1 75r	48 48 48
Auxiliaries and accessories Multi9 Electrical auxiliaries for MCB and RCD, except Acti9 iID RCCB Electrical auxiliaries for Acti9 iID RCCB up to 80 A Electrical auxiliaries for Acti9 iID RCCB 125 A Accessories for MCB and RCD, except Acti9 iID RCCB Accessories for Acti9 iID RCCB up to 80 A Accessories for Acti9 iID RCCB 125 A Comb busbars for C60BP Comb busbars for C60SP Comb busbars for C60N, C60H, C60L (18 mm / 0.71 in pitch) Comb busbars for N40N, N40 Vigi (9 mm / 0.35 in pitch) Linergy DS screw distribution blocks	53 53 61 69 70 75 80 81 83 84 86 88
Technical information Breaker and Residual Current Device standards The standards and their applications Circuit breakers tripping curves Influence of ambient temperature Dissipated power, Impedance and Voltage drop Short-circuit current limiting Clearance between device and bare sheet metal Copper Multi-cables connection	92 92 95 96 100 104 105 112
Control panel technical guides library	115

6

Multi9 C60BP - Z, C, D curves - Tunnel terminals



UL 489, CSA C22.2 No 5, IEC/EN 60947-2, GB/T 14048.2

As per the above standards:

C60BP are multi-standard miniature circuit breakers and branch circuit protection as defined by UL 489. It combines following functions:

- circuit protection against short-circuit currents
- circuit protection against overload currents
- tripping and electrical fault indication by the addition of auxiliaries.



Number of 18 mm (0.71 in) poles		Breaking capacity (kA rms) AIR UL 489 / CSA C22.2 No 5			Icu IEC 609	47-2			
	Voltage (Ue)	277 V \sim	240 V \sim	120 V \sim	60 V	440 V \sim	415 V \sim	240 V \sim	60 V
1P	0.5 to 35	10	14	14	10	-	3	10	20
	40 to 63	-	10	10	10	-	3	10	20
	Voltage (Ue)	480Y/277	7 V \sim	240 V \sim	125 V	440 V \sim	415 V \sim	240 V \sim	125 V
2P	1 to 25	10		14	10	6	10	20	10
	30 to 35	10		14	-	6	10	20	-
3P	1 to 35	10		14	-	6	10	20	-
2P/3P	40 to 63	-		10	-	6	10	20	-



Electrical diagrams

	1P	2	2P			3P	
DB408609	C 60 V 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	0.980PBQ	~ 1 3 * * 2 4	125 V 1 3 * * * * * * * * * * * * * * * * * * *	DB408611	~ 1 3 5 * * * * * * * * * *	

- same g manners											
Tunnel terr	Tunnel terminal connection										
Туре	UL489 and CSA voltages	1P				2P			3P		
		Curve			Width in	Curve		Width in	Curve		Width in
Rating (In)		z	С	D (=K)	9 mm (0.35 in) modules	С	D (=K)	9 mm (0.35 in) modules	С	D (=K)	9 mm (0.35 in) modules
C60BP											
0.5		M9F44170	M9F42170	M9F43170	2	-	-	4	-	-	6
1	1	M9F44101	M9F42101	M9F43101		M9F42201	M9F43201	1	M9F42301	M9F43301	1
2		M9F44102	M9F42102	M9F43102		M9F42202	M9F43202	1	M9F42302	M9F43302	1
3		M9F44103	M9F42103	M9F43103		M9F42203	M9F43203	1	M9F42303	M9F43303	
4	>	M9F44104	M9F42104	M9F43104		M9F42204	M9F43204	1	M9F42304	M9F43304	1
5	64	M9F44105	M9F42105	M9F43105		M9F42205	M9F43205]	M9F42305	M9F43305]
6	and 240 V	M9F44106	M9F42106	M9F43106		M9F42206	M9F43206	1	M9F42306	M9F43306	1
7		-	M9F42107	-		M9F42207	-		-	-	
8	480Y/277 V	M9F44108	M9F42108	M9F43108		M9F42208	M9F43208	1	M9F42308	M9F43308	1
10	727	M9F44110	M9F42110	M9F43110		M9F42210	M9F43210]	M9F42310	M9F43310	
13	<u>`</u>	-	M9F42113	-		M9F42213	-	1	-	-	
15	84	M9F44115	M9F42115	M9F43115		M9F42215	M9F43215]	M9F42315	M9F43315	
20		M9F44120	M9F42120	M9F43120		M9F42220	M9F43220	1	M9F42320	M9F43320	1
25		M9F44125	M9F42125	M9F43125		M9F42225	M9F43225		M9F42325	M9F43325	
30		M9F44130	M9F42130	M9F43130		M9F42230	M9F43230	J	M9F42330	M9F43330	J
35		M9F44135	M9F42135	M9F43135		M9F42235	M9F43235		M9F42335	M9F43335	
40	출	M9F44140	M9F42140	M9F43140	2	M9F42240	M9F43240	4	M9F42340	M9F43340	6
45	240 V only	M9F44145	M9F42145	-		M9F42245	-]	M9F42345	-	
50	2	M9F44150	M9F42150	-		M9F42250	-		M9F42350	-	
63	24	M9F44163	M9F42163	-		M9F42263	-		M9F42363	-	
Auxiliaries	exiliaries Remote indication and tripping, see page 53										
Accessories See page 70											

Multi9 C60BP - Z, C, D curves - Tunnel terminals (cont.)

Conformity with product standards

- UL 489 branch circuit protection, document #E215117.
- CSA C22.2 No 5 branch circuit protection, document #E179014.
- IEC/EN 60947-2.
- GB/T 14048.2.


UL 486A connections for copper cables, Without accessory document #E216919 Rating Tightening torque Copper cables (*) Rigid, flexible or with ferrule 14 mm 14 mm (0.55 in) (0.26 in) 몵 IEC 60947-2 UL 486A-B 0.5 to 25 A 2.5 N.m (22 lb.in) 1 to 25 mm² AWG #18 to #8 PZ2 30 to 63 A 3.5 N.m (31 lb.in) 1 to 35 mm² AWG #18 to #2

(*) See Copper Multi-cable connection chapter for more information, page 113.


Weight (g / oz)

Circuit breaker	
Туре	C60BP
1P	130 g / 4.58 oz
2P	260 g / 9.17 oz
3P	390 g / 13.76 oz


Dimensions (mm / inches)

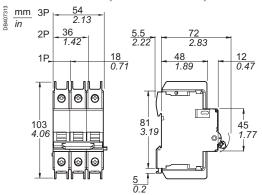

C60BP Tunnel terminal



Indifferent position of Clip on DIN rail 35 mm (1.38 in) installation.



LVCATM90EM_EN

	IP40
B	

Technical data

Main character	istics				
Insulation voltage (Ui)		500 V		
Service breaking ca	apacity (Ics) In alternating current	75 % of Icu		
		In direct current	100 % of Icu		
Pollution degree			3		
Rated impulse with	stand volta	ge (Uimp)	6 kV		
Thermal tripping	Reference	e temperature	25°C / 77°F		
Magnetic tripping	Z curve	In alternating current	3 ln ± 20 %		
		In direct current	4.2 In ± 20 %		
	C curve	In alternating current	8.5 ln ± 20 %		
		In direct current	12 In ± 20 %		
	D curve	In alternating current	12 ln ± 20 %		
	(=K curve	n direct current	17 In ± 20 %		
Additional char	racteristi	cs			
Degree of protectio	n Device o	nly	IP20		
(IEC 60529)	Device in	modular enclosure	IP40 Insulation class II		
Endurance (O-C)	Electrical		10,000 cycles		
	Mechanic	cal	20,000 cycles		
Operating temperar	ture		-30°C to +70°C / -22°F to 158°F		
Storage temperatur	re		-40°C to +80°C / -40°F to 176°F		
Tropicalization (IEC	C 60068-1)		Treatment 2 (relative humidity 95 % at 55°C / 131°F)		
Dissipated power			See page 104		

Railways 🚬					
Туре	1P	2P	3P		
Mass of combustible material	46.4 g / 1.64 oz	93.8 g / 3.31 oz	139.2 g / 4.91 oz		
Type of combustible material	PA66 GF25	FR			
Fire and smoke requirements (EN 45545-2) HL3 R22 / HL3 R23					
Resistance to shocks and vibrations (IEC 61373)	■ Category ■ Class B	/ 1			

Multi9 C60BPR - Z, C, D curves - Ring-tongue terminals



UL 489, CSA C22.2 No 5, IEC/EN 60947-2, GB/T 14048.2

As per the above standards:

C60BPR are multi-standard miniature circuit breakers and branch circuit protection as defined by UL 489. It combines following functions:


- circuit protection against short-circuit currents
- circuit protection against overload currents
- tripping and electrical fault indication by the addition of auxiliaries
- IP2X ring tongue terminal connection.



Number of 18 mm (0.71 in) poles	mm (0.71 in) 25°C/77°F			Breaking capacity (kA rms) AIR Icu UL 489 / CSA C22.2 No 5 IEC 60947-2			47-2		
	Voltage (Ue)	277 V \sim	240 V \sim	120 V \sim	60 V	440 V \sim	415 V \sim	240 V \sim	60 V
1P	1 to 35	10	14	14	10	-	3	10	20
	40 to 63	-	10	10	10	-	3	10	20
	Voltage (Ue)	480Y/277	$^{\prime}$ V \sim	240 V \sim	125 V	440 V \sim	415 V \sim	240 V \sim	125 V
2P	1 to 25	10		14	10	6	10	20	10
	30 to 35	10		14	-	6	10	20	-
3P	1 to 35	10		14	_	6	10	20	-
2P/3P	40 to 63	-		10		6	10	20	-



Electrical diagrams

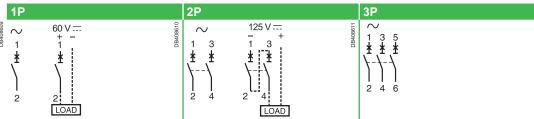

Typo	UL489 and	1P				2P			3P		
Туре	CSA voltages	TP .				2P			35		
Rating (In)		Curve Z	С	D (=K)	Width in 9 mm (0.35 in) modules	Curve	D (=K)	Width in 9 mm (0.35 in) modules	Curve	D (=K)	Width in 9 mm (0.35 in) modules
C60BPR											
1		-	M9F52101	M9F53101	2	M9F52201	M9F53201	4	M9F52301	M9F53301	6
2		-	M9F52102	-	1	M9F52202	M9F53202		M9F52302	M9F53302	1
4	2	-	M9F52104	M9F53104	1	M9F52204	M9F53204		M9F52304	M9F53304	1
6	and 240 V	-	M9F52106	M9F53106	1	M9F52206	M9F53206		M9F52306	M9F53306	1
8	2	-	M9F52108	M9F53108		M9F52208	M9F53208		M9F52308	M9F53308	1
10	>	-	M9F52110	M9F53110	1	M9F52210	M9F53210		M9F52310	M9F53310	1
15	480Y/277	-	M9F52115	M9F53115	1	M9F52215	M9F53215	1	M9F52315	M9F53315	1
20	ž	-	M9F52120	M9F53120	1	M9F52220	M9F53220	1	M9F52320	M9F53320	1
25	84	-	M9F52125	M9F53125	1	M9F52225	M9F53225	1	M9F52325	M9F53325	1
30		-	M9F52130	M9F53130	1	M9F52230	M9F53230	1	M9F52330	M9F53330	1
35		-	M9F52135	M9F53135	1	M9F52235	M9F53235		M9F52335	M9F53335	1
40	≥	M9F54140	M9F52140	M9F53140	2	M9F52240	M9F53240	4	M9F52340	M9F53340	6
45	240 V only	-	M9F52145	-	1	M9F52245	-		M9F52345	-	1
50		-	M9F52150	-	1	M9F52250	-		M9F52350	-	
63	24	-	M9F52163	-		M9F52263	-		M9F52363	-	
Auxiliaries		Remote ind	ication and	ripping, see	page 53						

Multi9 C60BPR - Z, C, D curves - Ring-tongue terminals (cont.)

Conformity with product standards

- UL 489 branch circuit protection, document #E215117.
- CSA C22.2 No 5 branch circuit protection, document #E179014.
- IEC/EN 60947-2.
- GB/T 14048.2.

UL 486A connections for copper wires, document #E216919

With accessory


		,		
Rating	Tightening torque	Screw-on connection for ring	g terminal	
1 to 63 A	2 N.m (18 lb.in)	B Sche (SSZLOPED) Sche (SSZLOPED) C C	DB433410.eps	
		A: Ø 6 mm (Ø 0.24 in) B: 12 mm +0.4/-2 (0.47 in +0.02/-0.08) C: 7.15 mm (0.28 in) minimum value	D: 3 mm (0.12 in) maxi or E: 2 x 1.5 mm (2 x 0.06 ir	n)

Note: Please check instruction sheet QGH7334601 for proper cable insertion

Weight (g / oz)

Circuit breaker	
Туре	C60BPR
1P	130 g / 4.58 oz
2P	260 g / 9.17 oz
3P	390 g / 13.76 oz


Dimensions

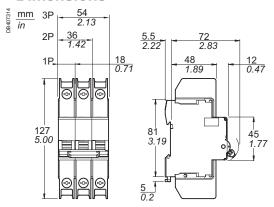


C60BPR Ring tongue terminal

Version: 2.12 - 19/12/2024

LVCATM90EM_EN

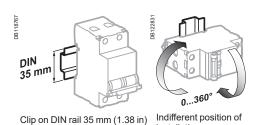

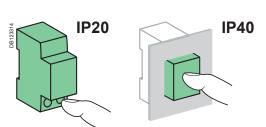

Main characteristics

Technical data

Main Character	ารแบร		
3 (- /			500 V
Service breaking ca	apacity (Ics) In alternating current	75 % of Icu
		In direct current	100 % of Icu
Pollution degree			3
Rated impulse with	stand volta	ge (Uimp)	6 kV
Thermal tripping	Referenc	e temperature	25°C / 77°F
Magnetic tripping	Z curve	In alternating current	3 ln ± 20 %
		In direct current	4.2 In ± 20 %
	C curve	In alternating current	8.5 ln ± 20 %
		In direct current	12 In ± 20 %
	D curve	In alternating current	12 In ± 20 %
	(=K curve)	In direct current	17 In ± 20 %
Additional cha	racteristic	cs	
Degree of protection	n Device or	nly	IP20
(IEC 60529)	Device in	modular enclosure	IP40
			Insulation class II
Endurance (O-C)	Electrical		10,000 cycles
	Mechanic	al	20,000 cycles
Operating tempera	ture		-30°C to +70°C / -22°F to 158°F
Storage temperatu	re		-40°C to +80°C / -40°F to 176°F
Tropicalization (IEC 60068-1)			Treatment 2 (relative humidity 95 % at 55°C / 131°F)
Dissipated power			See page 104

Railways 🚬					
Туре	1P	2P	3P		
Mass of combustible material	46.4 g / 1.64 oz	93.8 g / 3.31 oz	139.2 g / 4.91 oz		
Type of combustible material	PA66 GF25	FR			
Fire and smoke requirements (EN 45545-2)	HL3 R22 / H	HL3 R22 / HL3 R23			
Resistance to shocks and vibrations (IEC 61373)	CategoryClass B	1			

Multi9 C60SP - B, C, D curves - Tunnels terminals



UL 1077, CSA C22.2 No 235, IEC/EN 60947-2, GB/T 14048.2

As per the above standards:

C60SP are multi-standard miniature circuit breakers and supplementary protection as defined by UL 1077. It combines following functions:

- circuit protection against short-circuit currents
- circuit protection against overload currents
- tripping and electrical fault indication by the addition of auxiliaries.



Number of	Rating (A)	Breaking capacity (kA rms)							
18 mm (0.71 in)	25°C/77°F	AIR				Icu			
poles		UL 1077	// CSA C	22.2 No	235	IEC 609	47-2		
	Voltage (Ue)	277 V \sim	240 V \sim	120 V \sim	65 V	440 V \sim	415 V \sim	240 V \sim	60 V
1P	0.5 to 32	10	14	14	10	-	3	10	20
	40 to 63	5	10	10	10	-	3	10	20
	Voltage (Ue)	480Y/277	7 V \sim	240 V \sim	125 V	440 V \sim	415 V \sim	240 V \sim	125 V
2P	1 to 25	10		14	10	6	10	20	10
	32	10		14	-	6	10	20	-
3P/4P	2 to 32	10		14	-	6	10	20	-
2P/3P/4P	40 to 63	5		10	Ц	6	10	20	-



Electrical diagrams

1P		2P	3P	4P
C + 2 DB408642	65 V \$ 88080 800 \$ 21 \$ 1 \$ 1 \$ 1 \$ 1 \$ 1 \$ 1 \$ 1 \$ 1 \$	125 V 1 3 1 3 * * * * * * * * * * * * * * * * * * *	1 3 5 * * * * * * * * * * * * * * * * * *	1 3 5 7 * * * * 2 4 6 8

Tunnel termi	nal connectior	1						
Туре	1P				2P			
	Curve			Width in	Curve			Width in
Rating (In)	В	С	D (=K)	9 mm (0.35 in) modules	В	С	D (=K)	9 mm (0.35 in) modules
C60SP								
0.5	M9F21170	M9F22170	M9F23170	2	-	-	-	4
1	M9F21101	M9F22101	M9F23101		M9F21201	M9F22201	M9F23201	
2	M9F21102	M9F22102	M9F23102		M9F21202	M9F22202	M9F23202	
3	M9F21103	M9F22103	M9F23103		M9F21203	M9F22203	M9F23203	
1	M9F21104	M9F22104	M9F23104		M9F21204	M9F22204	M9F23204	
5	M9F21105	M9F22105	M9F23105		M9F21205	M9F22205	M9F23205	
3	M9F21106	M9F22106	M9F23106		M9F21206	M9F22206	M9F23206	
3	M9F21108	M9F22108	M9F23108		M9F21208	M9F22208	M9F23208	
10	M9F21110	M9F22110	M9F23110		M9F21210	M9F22210	M9F23210	
13	M9F21113	M9F22113	M9F23113		M9F21213	M9F22213	M9F23213	
16	M9F21116	M9F22116	M9F23116		M9F21216	M9F22216	M9F23216	
20	M9F21120	M9F22120	M9F23120		M9F21220	M9F22220	M9F23220	
25	M9F21125	M9F22125	M9F23125		M9F21225	M9F22225	M9F23225	
32	M9F21132	M9F22132	M9F23132		M9F21232	M9F22232	M9F23232	
40	M9F21140	M9F22140	M9F23140		M9F21240	M9F22240	M9F23240	
45	M9F21145	M9F22145	-		M9F21245	M9F22245	-	
50	M9F21150	M9F22150	-		M9F21250	M9F22250	-	
33	M9F21163	M9F22163	-		M9F21263	M9F22263	-	
Auxiliaries	Remote indic	ation and trippin	g, see page 53					
Accessories	See page 70							

Multi9 C60SP - B, C, D curves - Tunnels terminals (cont.)

Conformity with product standards

- UL 1077 supplementary protection, document #E90509.
- CSA C22.2 No. 235 supplementary protection, document #E179014.
- IEC/EN 60947-2.
- GB/T 14048.2.


UL 486A connections for copper cables, Without accessory document #E216919 Rating Tightening torque Copper cables (*) 14 mm (0.55 in) 6.5 mm (0.26 in) Rigid, flexible or with ferrule IEC 60947-2 UL 486A-B 0.5 to 25 A 2.5 N.m (22 lb.in) 1 to 25 mm² AWG #18 to #8 PZ2 AWG #18 to #2 3.5 N.m (31 lb.in) 1 to 35 mm² 30 to 63 A

mm in

Weight (g / oz)

Circuit-breaker	
Туре	C60SP
1P	120 g / 4.23 oz
2P	240 g / 8.46 oz
3P	360 g / 12.70 oz
4P	480 g / 16.93 oz

Dimensions (mm / inches)

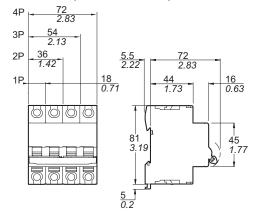

C60SP Tunnel terminal connection


3P				4P			
Curve			Width in	Curve			Width in
В	С	D (=K)	9 mm (0.35 in) modules	В	С	D (=K)	9 mm (0.35 in) modules
-	-	-	6	-	-	-	8
-	-	-		-	-	-	
M9F21302	M9F22302	M9F23302		M9F21402	M9F22402	M9F23402	
-	-	-		-	-	-	
-	-	-		-	-	-	
-	-	-	\neg	-	-	-	
M9F21306	M9F22306	M9F23306		M9F21406	M9F22406	M9F23406	
M9F21308	M9F22308	M9F23308		M9F21408	M9F22408	M9F23408	
M9F21310	M9F22310	M9F23310		M9F21410	M9F22410	M9F23410	
M9F21313	M9F22313	M9F23313		M9F21413	M9F22413	M9F23413	
M9F21316	M9F22316	M9F23316		M9F21416	M9F22416	M9F23416	
M9F21320	M9F22320	M9F23320		M9F21420	M9F22420	M9F23420	
M9F21325	M9F22325	M9F23325		M9F21425	M9F22425	M9F23425	
M9F21332	M9F22332	M9F23332		M9F21432	M9F22432	M9F23432	
M9F21340	M9F22340	M9F23340		M9F21440	M9F22440	M9F23440	
M9F21345	M9F22345	-		M9F21445	M9F22445	-	
M9F21350	M9F22350	-		M9F21450	M9F22450	-	
M9F21363	M9F22363	-		M9F21463	M9F22463	-	

^(*) See Copper Multi-cable connection chapter for more information, page 113.

Multi**9** C60SP - B, C, D curves – Tunnels terminals (cont.)




Clip on DIN rail 35 mm (1.38 in)



Indifferent position of installation.





Technical data

Main character	ristics		
Insulation voltage ((Ui)		500 V
Service breaking c	apacity (Ics)	In alternating current	75 % of Icu
		In direct current	100 % of Icu
Pollution degree			3
Rated impulse with	stand voltage	e (Uimp)	6 kV
Thermal tripping	Reference	temperature	25°C / 77°F
Magnetic tripping	B curve	In alternating current	4 ln ± 20 %
		In direct current	5.7 ln ± 20 %
	C curve	In alternating current	8.5 ln ± 20 %
		In direct current	12 In ± 20 %
	D curve (=K curve)	In alternating current	12 In ± 20 %
		In direct current	17 In ± 20 %
Additional cha	racteristics	S	
Degree of	Device only	/	IP20
protection	Device in m	nodular enclosure	IP40
(IEC 60529)			Insulation class II
Endurance (O-C)	Electrical		10,000 cycles
	Mechanica		20,000 cycles
Operating tempera	ture		-30°C to +70°C / -22°F to 158°F
Storage temperature			-40°C to +80°C / -40°F to 176°F
Tropicalization (IEC 60068-1)			Treatment 2 (relative humidity 95 % at 55°C / 131°F)
Dissipated power			See page 104

Railways				
Туре	1P	2P	3P	4P
Mass of combustible material	46.4 g / 1.64 oz	93.8 g / 3.31 oz	139.2 g / 4.91 oz	185.6 g / 6.55 oz
Type of combustible material	PA66 GF	25 FR		
Fire and smoke requirements (EN 45545-2)	HL3 R22 / HL3 R23			
Resistance to shocks and vibrations (IEC 61373)	■ Catego	•		

Multi9 C60H-DC - B, C, K curves – Tunnels terminals For DC circuits only



IEC/EN 60947-2, GB/T 14048.2, UL1077

As per the above standards:

C60H-DC are multi-standard miniature circuit breakers and supplementary protection as defined by UL 1077 dedicated to direct current. It combines following functions:

- circuit protection against short-circuit currents,
- circuit protection against overload currents,
- tripping and electrical fault indication by the addition of auxiliaries.



		Breaking capacity (kA rms)						
, , , , , , , , , , , , , , , , , , ,	25°C/77°F	AIR	lcu					
poles		UL 1077	IEC 60947-2					
Voltage (Ue)		12250 V	110 V	220 V	250 V			
1P	0.5 to 63	5	20	10	6			
Voltage (Ue)		12500 V		220 V	440 V	500 V		
2P	0.5 to 63	5	-	20	10	6		



Electrical diagrams

1P	2P	
1 X 2 + + + + + + + + + + + + + + + + + +	1 3 ± ± ± ± ± ± ± ± ± ± ± ± ± ± ± ± ± ±	1 3 <u>*</u>
Supply from above or below, observing the polarity	Supply from above or	Supply from below

C60H-DC							
Туре	1P			2P			
Rating (In)	Curve		Width in 9 mm (0.35 in) modules	Curve B C		D (=K)	Width in 9 mm (0.35 in) modules
C60H-DC	'		'				
0.5	M9U21170	-	2	-	M9U21270	-	4
1	M9U21101	-		-	M9U21201	-	
2	M9U21102	-		-	M9U21202	-	
3	M9U21103	-		-	M9U21203	-	
4	M9U21104	-		-	M9U21204	-	
6	M9U21106	-		M9U11206	M9U21206	M9U31206	
10	M9U21110	-		M9U11210	M9U21210	M9U31210	
13	M9U21113	-		M9U11213	M9U21213	-	
16	M9U21116	-		M9U11216	M9U21216	-	
20	M9U21120	-		-	M9U21220	M9U31220	
25	M9U21125	-		-	M9U21225	M9U31225	
32	M9U21132	-		M9U11232	M9U21232	M9U31232	
40	M9U21140	M9U31140		-	M9U21240	M9U31240	
50	M9U21150	-		M9U11250	M9U21250	M9U31250	
63	M9U21163	M9U31163		-	M9U21263	M9U31263	
Auxiliaries	Remote indica	tion and tripping, s	ee page 53				
Accessories	See page 70						

Multi9 C60H-DC - B, C, K curves – Tunnels terminals For DC circuits only (cont.)




Clip on DIN rail 35 mm (1.38 in)



Indifferent position of installation.





Weight (g / oz)

Circuit breaker				
Туре	C60H-DC			
1P	128 g / 4.51 oz			
2P	256 g / 9.03 oz			

Technical data

Main characterist	ics			
Insulation voltage (Ui)		500 V DC		
Rated service breaking	g capacity (Ics)	75 % of Icu		
Pollution degree		3		
Rated impulse withsta under frame	nd voltage (Uimp)	6 kV		
Thermal tripping	Reference temperature	25°C / 77°F		
Magnetic tripping (li)	B curve	Between 3 and 7 In		
	C curve	Between 7 and 10 In		
	D curve (=K curve)	Between 10 and 14 In		
Additional charac	teristics			
Degree of protection	Device only	IP20		
(IEC 60529)	Device in modular enclosure	IP40 Insulation class II		
Endurance (O-C)	Electrical	3,000 cycles (where L/R=2 ms)		
		6,000 cycles where the circuit is resistive		
	Mechanical	20,000 cycles		
Utilization category		A (no delay in accordance with IEC/EN 60947-2 standards)		
Operating temperature	•	-25°C to 70°C / -13°F to 158°F		
Storage temperature		-40°C to 85°C / -40°F to 185°F		
Tropicalization (IEC 60	0068-1)	Treatment 2 (relative humidity 95 % at 55°C / 131°F)		
Dissipated power		See page 104		




Failure to match polarity during connection may lead to a fire hazard and/or serious injury.

- The connection polarity must be observed (marked on the front panel).
- Use only with direct current.

Without accessory

■ If two poles are used in series for the American network, use at least a 12 inch / 30 cm cable.


Connection




Rating	Tightening torque	Copper cables (*)	
		Rigid, flexible or with ferr	rule
	DB122845	DB6122946	
		IEC 60947-2	UL 486A-B
0.5 to 25 A	2.5 N.m (22 lb.in)	1 to 25 mm ²	AWG #18 to #8
30 to 63 A	3.5 N.m (31 lb.in)	1 to 35 mm ²	AWG #18 to #2

(*) See Copper Multi-cable connection chapter for more information, page 113.

Dimensions (mm / inches)





1P	2P		
39.3 g / 1.39 oz	78.6 g / 2.77 oz		
PA6 GF20 FR			
HL2 R22 / HL2 R23			
Category 1			
■ Class B			
	39.3 g / 1.39 oz PA6 GF20 FR HL2 R22 / HL2 R23 Category 1		

C60H-DC



Multi9 C60N - B, C, D curves







C60N 1P

C60N 3P





C60N 2P

C60N 4P

IEC/EN 60947-2, GB/T 14048.2

As per the above standards:

- C60N circuit breakers are circuit breakers which combine the following functions:
- □ circuit protection against short-circuit currents,
- □ circuit protection against overload currents,
- □ breaking and industrial disconnection as per standards IEC/EN 60947-2.
- A green strip on the toggle indicates full opening of all the poles allowing downstream maintenance operation.
- Increased product service life thanks:
- □ overvoltage resistance,
- □ high performance limitation,
- □ to fast closing independent of the speed of actuation of the toggle.
- Upstream or downstream connection.
- Sompatible with PowerTag Energy (for 2P, only 200... 240 V AC)

Positive contact indication

■ Suitability for isolation in accordance with the IEC/EN 60947-2 standard.

Alternating current (AC) 50/60 Hz								
Ultimate l	Service							
	breaking							
Ph/Ph (2P,	3P, 4P)	240 V	415 V	-	440 V	capacity		
Ph/N (1P)		-	240 V	415 V	-	(Ics)		
Rating (In)	1 to 63 A	20 kA	10 kA	3 kA ^(*)	6 kA	75 % of Icu		
i _{rr}		1.2 x 12 ln						

(*) Breaking capacity under 1 pole with IT isolated neutral system (case of double fault).


Direct current (DC)								
Breaking capacity (Icu) according to IEC/EN 60947-2 Service								
Voltage (Ue)					breaking			
Between +/-	≤72 V	≤ 125 V	≤ 180 V	≤ 250 V	capacity			
Number of poles	1P	2P	3P	4P	(lcs)			
Rating (In) 1 to 63 A	15 kA	20 kA	30 kA	40 kA	100 % of Icu			

C60N circuit breaker												
Туре	1P			2P			3P			4P		
E46082	*		E45094	* * 		E45095	* * *		E45097	* * *	* *	
Rating (In)	Curve			Curve			Curve			Curve		
	В	С	D	В	С	D	В	С	D	В	С	D
1 A	-	M9F11101	M9F12101	-	M9F11201	-	-	M9F11301	-	-	-	-
2 A	M9F10102	M9F11102	M9F12102	-	M9F11202	M9F12202	-	M9F11302	M9F12302	-	-	-
3 A	-	M9F11103	M9F12103	-	M9F11203	M9F12203	-	M9F11303	-	-	M9F11403	-
4 A	M9F10104	M9F11104	M9F12104	-	M9F11204	M9F12204	-	M9F11304	M9F12304	M9F10404	-	-
6 A	-	M9F11106	M9F12106	M9F10206	M9F11206	M9F12206	-	M9F11306	M9F12306	-	-	-
10 A	M9F10110	M9F11110	M9F12110	M9F10210	M9F11210	M9F12210	-	M9F11310	M9F12310	-	M9F11410	M9F12410
13 A	-	-	-	M9F10213	-	-	-	-	M9F12313	-	-	-
16 A	M9F10116	M9F11116	-	M9F10216	M9F11216	M9F12216	-	M9F11316	M9F12316	M9F10416	M9F11416	M9F12416
20 A	-	M9F11120	-	M9F10220	M9F11220	M9F12220	-	M9F11320	M9F12320	M9F10420	M9F11420	-
25 A	-	M9F11125	M9F12125	-	M9F11225	M9F12225	-	M9F11325	M9F12325	M9F10425	M9F11425	-
32 A	-	M9F11132	-	-	M9F11232	M9F12232	M9F10332	M9F11332	M9F12332	M9F10432	M9F11432	-
40 A	-	M9F11140	-	M9F10240	M9F11240	M9F12240	-	M9F11340	-	-	M9F11440	-
50 A	-	M9F11150	-	-	M9F11250	-	M9F10350	M9F11350	-	M9F10450	M9F11450	-
63 A	-	M9F11163	-	-	M9F11263	-	M9F10363	M9F11363	-	M9F10463	M9F11463	-
Width in 9-mm (0.35 in) mod.	2			4			6			8		
Vigi C60	See page 4	2										
Auxiliaries	See page 5	3										
Accessories	See page 7	0										
PowerTag energy sensors	See Power	Logic catalo	og: PLSED3	09005EN								

Multi9 C60N - B, C, D curves (cont.)

Co	onnection			Without accesso	ry
123060		Rating	Tightening torque	Copper cables (*)	
08	14 mm				ule
(0.26 in) (0.26 in)		DB 1722445	DB 1723946		
	1 to 25 A	2.5 N.m / 22 lb.in	1 to 25 mm ²	AWG #18 to #8	
PZ2		32 to 63 A	3.5 N.m / 31 lb.in	1 to 35 mm ²	AWG #18 to #2

^(*) See Copper Multi-cable connection chapter for more information, page 113.




Clip on DIN rail 35 mm (1.38 in)



Indifferent position of installation.






Technical data

According to IEC	EN 6094	47-2		
Insulation voltage (Ui)		500 V AC	
Pollution degree			3	
Rated impulse withst	and voltag	6 kV		
Thermal tripping	Reference	e temperature	50°C / 122°F	
Magnetic tripping (Ii)	B curve	in alternative current	4 ln ± 20 %	
		in direct current	5.7 In (± 20 %)	
	C curve	in alternative current	8.5 ln ± 20 %	
		in direct current	12 In (± 20 %)	
	D curve	in alternative current	12 In ± 20 %	
		in direct current	17 In (± 20 %)	
	According	g to current frequency	50/60 Hz	
Utilization category			A	
Additional chara	cteristic	s		
Degree of protection	Device or	nly	IP20	
(IEC 60529)	Device in	modular enclosure	IP40	
			Insulation class II	
Endurance (O-C)	Electrical		10,000 cycles	
	Mechanic	cal	20,000 cycles	
Service temperature			-30°C to +70°C / -22°F to 158°F	
Storage temperature	Storage temperature		-40°C to +80°C / -40°F to 176°F	
Tropicalization (IEC 60068-1)		Treatment 2 (relative humidity 95 % at 55°C / 131°F)		
Dissipated power			See page 104	

Weight (g / oz)

Circuit breaker	
Туре	C60N
	120 g / 4.23 oz
	240 g / 8.46 oz
3P	360 g / 12.70 oz
4P	480 g / 16.93 oz

Dimensions (mm / inches)

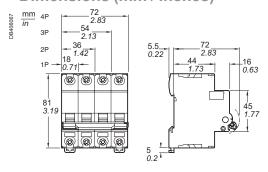

Multi9 C60H - B, C, D curves







C60H 1P

C60H3P





C60H 2P

C60H4P

IEC/EN 60947-2, GB/T 14048.2

As per the above standards:

- C60H circuit breakers are circuit breakers which combine the following functions:
- □ circuit protection against short-circuit currents,
- □ circuit protection against overload currents,
- □ breaking and industrial disconnection as per standards IEC/EN 60947-2.
- A green strip on the toggle indicates full opening of all the poles allowing downstream maintenance operation.
- Increased product service life thanks:
- □ overvoltage resistance,
- □ high performance limitation,
- □ to fast closing independent of the speed of actuation of the toggle.
- Upstream or downstream connection.
- Compatible with PowerTag Energy

Positive contact indication

■ Suitability for isolation in accordance with the IEC/EN 60947-2 standard.

Alternating current (AC) 50/60 Hz								
Ultimate b	Service							
	breaking							
Ph/Ph (2P,	3P, 4P)	240 V	415 V	-	440 V	capacity		
Ph/N (1P)		-	240 V	415 V	-	(Ics)		
Rating (In)	1 to 40 A	30 kA	15 kA	3 kA ^(*)	10 kA	50 % of Icu		
i _{rr}		1.2 x 12 ln						

(*) Breaking capacity under 1 pole with IT isolated neutral system (case of double fault).

Direct current (DC)							
Breaking capacity (Icu) according to IEC/EN 60947-2 Service							
	Voltage (Ue	breaking					
Between +/-	≤72 V	≤ 125 V	≤ 180 V	≤ 250 V	capacity (Ics)		
Number of poles	1P	2P	3P	4P	(ICS)		
Rating (In) 1 to 40 A	20 kA	25 kA	40 kA	50 kA	100 % of Icu		

Catalog numbers


C60H circuit b			an.	an.			4D		
Туре	1P		2P	3P			4P		
	E45082	F 4 4704	* * * * * * * * * * * * * * * * * * *	1 3 5 * * * *		E45097	1 3 5 X * * * 2		
Rating (In)	Curve		Curve	Curve			Curve		
	С	D	С	В	С	D	В	С	D
2 A	M9F14102	-	-	-	-	M9F15302	M9F13402	-	-
Α	M9F14106	-	M9F14206	-	M9F14306	-	-	M9F14406	M9F15406
0 A	M9F14110	-	M9F14210	M9F13310	M9F14310	M9F15310	M9F13410	-	-
6 A	-	-	M9F14216	-	M9F14316	-	M9F13416	-	-
20 A	-	M9F15120	M9F14220	-	M9F14320	M9F15320	-	-	-
25 A	-	-	M9F14225	-	-	-	-	M9F14425	-
32 A	-	-	M9F14232	-	M9F14332	-	M9F13432	M9F14432	-
10 A	-	-	M9F14240	-	-	-	-	-	-
Vidth in 9-mm (0.35 i nod.	n) 2		4	6			8		
Vigi C60	See page 42								
Auxiliaries	See page 53								
Accessories	See page 70								
PowerTag energy sensors		ogic catalog: PL	.SED309005EN						

2)


Multi9 C60H - B, C, D curves (cont.)

	Connection		Without accessory		
23060		Rating	Tightening torque	Copper cables (*)	
08	14 mm (0.55 in) 6.5 mm (0.26 in)			Rigid, flexible or with ferr	ule
			DB:122945	DB 1728946	
		1 to 25 A	2.5 N.m / 22 lb.in	1 to 25 mm ²	AWG #18 to #8
	PZ2	32 and 40 A	3.5 N.m / 31 lb.in	1 to 35 mm ²	AWG #18 to #2

^(*) See Copper Multi-cable connection chapter for more information, page 113.



Clip on DIN rail 35 mm (1.38 in)



Indifferent position of installation.






Technical data

According to IEC	/EN 6094	7-2		
Insulation voltage (Ui)		500 V AC	
Pollution degree			3	
Rated impulse withsta	and voltage	(Uimp)	6 kV	
Thermal tripping	hermal tripping Reference temperature		50°C / 122°F	
Magnetic tripping (Ii)	B curve	in alternative current	4 In ± 20 %	
		in direct current	5.7 In (± 20 %)	
	C curve	in alternative current	8.5 ln ± 20 %	
		in direct current	12 In (± 20 %)	
	D curve	in alternative current	12 ln ± 20 %	
		in direct current	17 In (± 20 %)	
	According	to current frequency	50/60 Hz	
Utilization category			Α	
Additional chara	cteristics			
Degree of protection	Device onl	у	IP20	
(IEC 60529)	Device in r	nodular enclosure	IP40	
			Insulation class II	
Endurance (O-C)	Electrical		10,000 cycles	
	Mechanica	al	20,000 cycles	
Service temperature			-30°C to +70°C / -22°F to 158°F	
Storage temperature			-40°C to +80°C / -40°F to 176°F	
		Treatment 2 (relative humidity 95 % at 55°C / 131°F)		
Dissipated power			See page 104	

Weight (g / oz)

Circuit breaker				
Туре	C60H			
1P	120 g / 4.23 oz			
2P	240 g / 8.46 oz			
3P	360 g / 12.70 oz			
4P	480 g / 16.93 oz			

Dimensions (mm / inches)

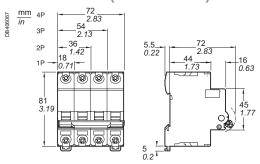

Multi9 C60L - C curve











IEC/EN 60947-2

As per the above standards:

- C60L circuit breakers are circuit breakers which combine the following functions:
- □ circuit protection against short-circuit currents,
- □ circuit protection against overload currents,
- □ breaking and industrial disconnection as per standards IEC/EN 60947-2.
- A green strip on the toggle indicates full opening of all the poles allowing downstream maintenance operation.
- Increased product service life thanks:
- □ overvoltage resistance,
- □ high performance limitation,
- □ to fast closing independent of the speed of actuation of the toggle.
- Upstream or downstream connection.
- Compatible with PowerTag Energy

Positive contact indication

■ Suitability for isolation in accordance with the IEC/EN 60947-2 standard.

Alternating current (AC) 50/60 Hz						
Ultimate breaking capacity (Icu) as per IEC/EN 60947-2						
Voltage (Ue)				breaking		
Ph/Ph (2P, 3P, 4P)		240 V	415 V	-	440 V	capacity
Ph/N (1P)		-	240 V	415 V	-	(Ics)
Rating (In)	1 to 25 A	50 kA	25 kA	3 kA ^(*)	20 kA	50 % of Icu
i,,		1.2 x 8.5 ln				

(*) Breaking capacity under 1 pole with IT isolated neutral system (case of double fault).


Direct current (DC)						
Breaking capacity (Icu) according to IEC/EN 60947-2 Service						
	Voltage (Ue)					
Between +/-	≤ 72 V	≤ 125 V	≤ 180 V	≤ 250 V	capacity (Ics)	
Number of poles	1P	2P	3P	4P	(ICS)	
Rating (In) 1 to 25 A	25 kA	30 kA	50 kA	60 kA	100 % of Icu	

C60L circuit breaker					
Туре	1P	2P	3P	4P	
E44082	T * 1	* * *	1 3 5 * * * *	* * * * * 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	
Rating (In)	Curve C	Curve C	Curve C	Curve C	
1 A	M9F17101	M9F17201	M9F17301	M9F17401	
2 A	M9F17102	M9F17202	M9F17302	M9F17402	
3 A	M9F17103	M9F17203	M9F17303	M9F17403	
4 A	M9F17104	M9F17204	M9F17304	M9F17404	
6 A	M9F17106	M9F17206	M9F17306	M9F17406	
10 A	M9F17110	M9F17210	M9F17310	M9F17410	
16 A	M9F17116	M9F17216	M9F17316	M9F17416	
20 A	M9F17120	M9F17220	M9F17320	M9F17420	
25 A	M9F17125	M9F17225	M9F17325	M9F17425	
Width in 9-mm (0.35 in) modules	2	4	6	8	
Vigi C60	See page 42				
Auxiliaries	See page 53				
Accessories	See page 70				
PowerTag energy sensors	See PowerLog	ic catalog: PLSE	ED309005EN		


Multi9 C60L - C curve (cont.)

Connection		Without acc	essory		
23060	Rating	Tightening torque	Copper cables (Copper cables (*)	
14 mm (0.55 in) 6.5 mm (0.26 in)			Rigid, flexible or with ferrule		
			DB 1222945	SP622180	
	1 to 25 A	2.5 N.m / 22 lb.in	1 to 25 mm ²	AWG #18 to #8	


(*) See Copper Multi-cable connection chapter for more information, page 113.



Clip on DIN rail 35 mm (1.38 in)



Indifferent position of installation.




Technical data

According to IEC	/EN 6094	7-2		
Insulation voltage (Ui))	500 V AC		
Pollution degree		3		
Rated impulse withsta	and voltage	(Uimp)	6 kV	
Thermal tripping	Reference temperature		50°C / 122°F	
Magnetic tripping (li) C curve in alternative current		in alternative current	8.5 In ± 20 %	
		in direct current	12 In (± 20 %)	
	According	to current frequency	50/60 Hz	
Utilization category		Α		
Additional charac	cteristics			
Degree of protection	Device only		IP20	
(IEC 60529)	Device in modular enclosure		IP40	
			Insulation class II	
Endurance (O-C)	Electrical		10,000 cycles	
	Mechanic	al	20,000 cycles	
Service temperature			-30°C to +70°C / -22°F to 158°F	
Storage temperature			-40°C to +80°C / -40°F to 176°F	
Tropicalization (IEC 60068-1)			Treatment 2	
			(relative humidity 95 % at 55°C / 131°F)	
Dissipated power			See page 104	

Weight (g / oz)

Circuit breaker				
Туре	C60L			
1P	120 g / 4.23 oz			
2P	240 g / 8.46 oz			
3P	360 g / 12.70 oz			
4P	480 g / 16.93 oz			

Dimensions (mm / inches)

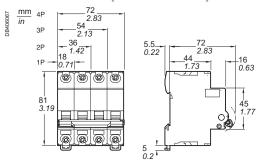

Multi9 C60CTRL - Z, C curves For control circuits protection







IEC/EN 60947-2

As per the above standards:

"C60CTRL circuit breakers for the protection of control circuits" protect and isolate:

- control circuits for industrial equipment with contactor coils, transformers, small motors, etc.
- programmable controllers (PLCs), voltage presence indicators, measuring and monitoring instruments, etc.
- single-phase auxiliary circuits such as solenoid valves, battery chargers, etc.
- C60CTRL circuit breakers combine the following features:
- □ protection of circuits against short-circuit and overload currents,
- $\hfill\Box$ breaking and isolation capability in the industrial sector to IEC/EN 60947-2.
- A green strip on the toggle indicates full opening of all the poles allowing downstream maintenance operation.
- The service life of the products is improved by:
- □ good overvoltage withstand capacity,
- ☐ fast closure, independent of handle operating speed.
- They can be connected upstream and downstream.

Alternatin	Alternating current (AC) 50/60 Hz					
Breaking ca	Breaking capacity (Icu) to IEC/EN 60947-2 Service breaking					
Voltage (Ue)				capacity (Ics)		
Ph/Ph (2P)		240 V	415 V			
Ph/N (1P)		-	240 V			
Rating (In)	1 to 3 A	100 kA	100 kA	50 % of Icu		

Direct current (DC)						
Breaking capacity (Icu) to IEC/EN 60947-2 Service breaking						
Voltage (Ue)			capacity (Ics)			
Between +/-		60 V	125 V			
Number of poles		1P	2P			
Rating (In)	1 to 3 A	25 kA	30 kA	100 % of Icu		

C60CTRL circuit breakers for the protection of control circuits				
Туре	1P	2P		
E44002	1 **	* * * *		
Rating (In)	Z curve	C curve		
1 A	M9C02301	-		
3 A	-	M9C01203		
Width in 9 mm (0.35 in) modules	2	4		
Vigi C60	See page 42			
Auxiliaries	See page 53			
Accessories	See page 70			


Multi9 C60CTRL - Z, C curves For control circuits protection (cont.)

C	onnection			Without accesso	ry
DB123060		Rating		Copper cables (*)	
8	14 mm			Rigid, flexible or with ferro	ıle
(0.2 (0.2 (0.2 (0.2 (0.2 (0.2 (0.2 (0.2	(0.55 in) 6.5 mm (0.26 in)		DB 172845	D8 172846	
0	1 to 4 A	1 to 4 A	2.5 N.m / 22 lb.in	1 to 25 mm ²	AWG #18 to #8

^(*) See Copper Multi-cable connection chapter for more information, page 113.




Clip on DIN rail 35 mm.



Indifferent position of installation.






Technical data


According to IEC	/EN 609	47-2	
Insulation voltage (Ui)			500 V AC
Pollution degree			1
Rated impulse withsta	and voltag	ge (Uimp)	6 kV
Thermal tripping	Referen	ce temperature	50°C / 122°F
Magnetic tripping (li)	C curve	in alternative current	8.5 ln ± 20 %
		in direct current	12 In (± 20 %)
	Z curve	in alternative current	3 ln ± 20 %
		in direct current	4.2 In (± 20 %)
	Accordin	ng to current frequency	50/60 Hz
Utilization category			Α
Additional characteristics			
Degree of protection	Device only		IP20
(IEC 60529)	Device in	n modular enclosure	IP40 Insulation class II
Endurance (O-C)	Electrica	ıl	10,000 cycles
	Mechani	ical	20,000 cycles
Operating temperature			-30°C to +70°C / -22°F to 158°F
Storage temperature			-40°C to +80°C / -40°F to 176°F
Tropicalization (IEC 60068-1)			Treatment 2 (relative humidity 95 % at 55°C / 131°F)
Dissipated power			See page 104

Weight (g / oz)

Circuit breakers	
Туре	C60CTRL
1P	120 g / 4.23 oz
2P	240 g / 8.46 oz

Dimensions (mm / inches)





29

Multi9 N40N - C curve







IEC/EN 60947-2

As per the above standards:

- N40N circuit breakers are circuit breakers which combine the following functions:
- □ circuit protection against short-circuit currents,
- □ circuit protection against overload currents,
- □ breaking and industrial disconnection as per standards IEC/EN 60947-2.
- A green strip on the toggle indicates full opening of all the poles allowing downstream maintenance operation.
- Increased product service life thanks:
- □ overvoltage resistance,
- □ high performance limitation,
- $\hfill\Box$ to fast closing independent of the speed of actuation of the toggle.
- Upstream or downstream connection.

Positive contact indication


■ Suitability for isolation in accordance with the IEC/EN 60947-2 standard.

Alternating current (AC) 50/60 Hz				
Ultimate breaking capacity (Icu) as per IEC/EN 60947-2 Service				
Voltage (Ue)		breaking		
Ph/Ph (3P+N)	415 V	capacity		
Ph/N (1P+N)	240 V	(lcs)		
Rating (In) 1 to 40 A	10 kA	75 % of Icu		
i _π 1.2 x 8.5 ln				

Outding frameers						
N40N circuit breakers						
	10 kA					
Туре	1P+N	3P+N				
DB123389	X X X	* * * * * * * * * * * * * * * * * * *				
Rating (In)	C curve	C curve				
1 A	M9P22601	-				
2A	M9P22602	-				
3 A	M9P22603	-				
4 A	M9P22604	-				
6 A	M9P22606	-				
10 A	M9P22610	M9P22710				
16 A	M9P22616	M9P22716				
20 A	M9P22620	M9P22720				
25 A	M9P22625	M9P22725				
32 A	-	M9P22732				
40 A	-	M9P22740				
Width in 9-mm (0.35 in) mod.	2	6				
Vigi	See page 44					
Auxiliaries	See page 53					
Accessories	See page 70					
PowerTag energy sensors	See PowerLogic catalog: PLSED30	09005EN				


Multi9 N40N - C curve (cont.)

Connection

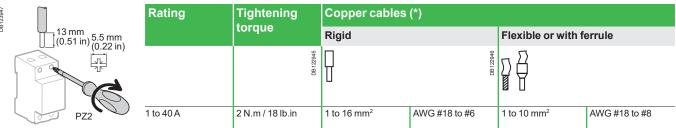


(*) See Copper Multi-cable connection chapter for more information, page 113.


Connection by comb busbar or cables (as per EN 50027).



Clips on to 35 mm (1.38 in) DIN rail



Indifferent position of installation.






Technical data

Main characteristics				
According to IEC/EN 60947-2				
Insulation voltage (Ui)	Phase-to-	phase	240415 V AC	
Thermal tripping	Reference	temperature	50°C / 122°F	
Magnetic tripping	C curve		8.5 ln (± 20 %)	
Rated impulse withstand	voltage (Uir	np)	4 kV	
Pollution degree			3	
Additional characteristics				
Degree of protection	Device only		IP20	
(IEC 60529)	Device in modular enclosure		IP40	
			Insulation class II	
Endurance (O-C)	Electrical	≤20 A	20,000 cycles	
		≥ 25 A	10,000 cycles	
	Mechanica	al	20,000 cycles	
Operating temperature			-25°C to +70°C / -13°F to 158°F	
Storage temperature			-40°C to +70°C / -40°F to 158°F	
Tropicalization (IEC 60068-1)		Treatment 2 (relative humidity 95 % at 55°C / 131°F)		
Dissipated power			See page 104	

Dimensions (mm / inches)

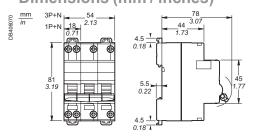

Weight (g / oz)

Circuit breakers	
Туре	N40N
1P+N	115 g / 4.06 oz
3P+N	322 g / 11.35 oz

31

Multi9 GFP - Ground Fault Protector







UL 1053 IEC/EN 61008-1

As per the above standards:

UL 1053 residual current circuit breakers already protected upstream by a circuit breaker device are used for:

- control and disconnection of electric circuits
- protection of people against electric shock by direct and indirect contacts
- protection of installations against insulation faults
- enhanced continuity of supply, during a series of close lightning strokes, IT earthing system, equipment including interference suppression filters, variable speed controllers, frequency converters, electronic ballasts for lighting
- enhanced earth leakage protection: in presence of harmonics or high frequency rejections.

They comply with RCD standards UL 1053 and IEC/EN 61008.

A-SI type GFPs are ideal for operation in environments with a humid atmosphere and/or polluted by aggressive agents: swimming pools, marinas, agri-food industries, water treatment stations, industrial sites, etc.


Catalog numbers

GFP UL 1053 A-SI type 🗻						
A-SI type	Rating (A)	Sensitiv (mA)	vity	Cat. no.		Width in mod.
		UL 1053	IEC/ EN 61008	120 or 240 V 230 or 240 V	240 V 480Y/277 V 230/400 or 240/415 V	of 9 mm (0.35 in)
2P						
N 1 3	25	26	30	M9R81225	M9R41225	4
^{≅ ⊥}		86	100	M9R12225	-	
		260	300	M9R84225	M9R44225	
* 'A ()	40	26	30	M9R81240	M9R41240	
		260	300	M9R84240	-	
N 2 4	63	26	30	M9R81263	-	
4P						
N 1 3 5 7	25	26	30	-	M9R81425	8
		86	100	-	M9R12425	
7 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		260	300	-	M9R84425	
° '7 (D-G	40	26	30	-	M9R81440	
<u> </u>		260	300	-	M9R84440	
NI2 4 6 8	63	26	30	-	M9R81463	
		86	100	-	M9R12463	
	100	86	100	-	M9R12491	
		260	300	-	M9R84491	
Auxiliaries	2P: with	out auxi	liaries			
	4P: see page 53					
Accessories	See pag					
Voltage rating 2P	230 - 24					
(Ue) 4P 400 - 415 V						
Operating frequency 50/60 Hz						

UL 486A connections for copper cables, document #E216919			Without acce	Without accessory		
14 mm	Rating	Tightening torque	Copper cables (*)			
14 mm (0.55 in) 6.5 mm (0.26 in)			Rigid, flexible or wi	th ferrule		
			DB172048	08172946		
570			IEC/EN 61008-1	UL 486A-B		
PZ2	25 to 100 A	3.5 N.m / 31 lb.in	1 to 35 mm ²	AWG #18 to #2		
			(*) O O M III I			

(*) See Copper Multi-cable connection chapter for more information, page 113.

Multi9 GFP - Ground Fault Protector (cont.)




Clip on DIN rail 35 mm (1.38 in)



Indifferent position of installation.






Technical data


Technical data		
Insulation voltage (Ui)		440 V
Pollution degree		3
Making and breaking caparated residual current (I∆m		1 500 A
Rated impulse withstand vo (Uimp)	oltage	6 kV
Utilisation category		AC 23A
Level of immunity		In current wave 8/20 µs: 3 kÂ
		In dampened recurrent current wave 0.5 µs/100 kHz: 200 A
Short-circuit current withsta	and (I∆c = Inc)	10 kA with 100 A gG upstream fuse
Test button minimum	2P	113 V AC
operating voltage	4P	189 V AC
Phase-to-phase test circuit		To avoid external bridging on use on three-phase network without neutral
Locking possible in "tripped position	"	By padlocking facility (not supplied)
Release with fixed sensitivi for all ratings	ty	Instantaneous release: UL 1053 : ±15 % IEC/EN 61008 : +0 %, -50 %
Behaviour in case of voltage drop	Nit	Residual current protection down to 0 V according to IEC/EN 61008-1 § 3.3.4
Earth fault indication		On front face by red mechanical indicator
Number of cycles (O-C)		20,000 cycles
Degree of protection	Device only	IP20
(IEC 60529)	Device in modular enclosure	IP40 Insulation class II
Operating temperature		-25°C to +60°C / -13°F to 140°F
Storage temperature		-40°C to +70°C / -40°F to 158°F
Tropicalization (IEC 60068	-1)	Treatment 2 (relative humidity 95 % at 55°C / 131°F)
Dissipated power		See page 104

Weight (g / oz)

GFP UL 1053 A-SI type 🏡		
Туре	GFP	
2P	220 g / 7.76 oz	
4P	450 g / 15.87 oz	


Dimensions (mm / inches)





33

Acti9 iID B-SI type Residual Current Circuit Breakers (RCCB)

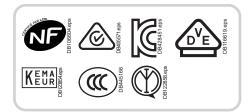





IEC/EN 61008-2-1, IEC/EN 62423 IEC 61543, VDE 0664

As per the above standards:

- The Acti9 iID B-SI type residual current circuit breakers provide:
- □ protection of persons against electric shock by direct contact (30 mA),
 □ protection of persons against electric shock by indirect contact (≥ 300 mA),
- □ protection of installations against the risk of fire (300 mA or 500 mA).

B-SI type The Acti9 iID B-SI type residual current circuit breakers provide: protection in the event of a continuous earth fault current on networks generated by:

- controllers and variable speed drives,
- battery chargers and inverters, such as used in photovoltaic application,
- □ backed-up power supplies.
- They include protection against earth fault currents:
- sinusoidal AC residual currents (AC type),
- □ pulsed DC residual currents (A type),
 □ multi frequency residual current (F type).
- The use of Acti9 iID B-SI type residual current circuit breaker can be made mandatory, according to standards applicable in country.
- For applications using 3-poles drives, such as:
- □ crane,
- □ lift,
- □ HÝAC,
- pumping system.
- B type is needed.

For more information, see Earth Fault Protection guide (CA908066E).


- The Acti9 iID B-SI type works optimally with the variable speed drives manufactured by Schneider Electric, even with a long cable length between motor and variable speed drive (up to 50 m).
- SI technology is embedded in Acti9 iID B-SI type residual current circuit breaker, providing increased immunity from electrical interference and polluted environments.
- The Acti9 iID B-SI type is compatible with Schneider Electric AC and A types wired in parallel or in series in the installation, following coordination tables (refer to Earth Fault Protection guide CA908066E).



Compatible with PowerTag Energy

- 4.4								
Acti9 iID B-SI type residual curre	ent circu	uit breakers						
			B-SI SI SI				Width in 9 mm (0.35 in) mod.	
2P			Sensitivity	30 mA	300 mA	300 mA S	500 mA	
N 1	Rating	25 A		A9Z61225	A9Z64225	-	-	8
		40 A		A9Z61240	A9Z64240	-	-	1
T L N 2		63 A		A9Z61263	A9Z64263	-	-	
Voltage rating (Ue)				230 V				
Operating frequency				50 Hz				
4P			Sensitivity	30 mA	300 mA	300 mA S	500 mA	
Rat 25 4 6 6	Rating	25 A		A9Z61425	A9Z64425	-	-	8
		40 A		A9Z61440	A9Z64440	A9Z65440	A9Z66440	
		63 A		A9Z61463	A9Z64463	A9Z65463	A9Z66463	
		80 A		A9Z61480	A9Z64480	A9Z65480	A9Z66480	
Voltage rating (Ue)	400 V							
Operating frequency	50 Hz							
PowerTag energy sensors	See PowerLogic catalog: PLSED309005EN							


Acti9 iID B-SI type Residual Current Circuit Breakers (RCCB) (cont.)



Clip on DIN rail 35 mm (1.38 in)




Indifferent position of installation.

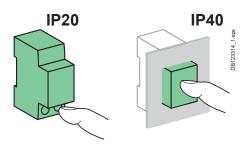


Technical data

Electrical characteristics					
Insulation voltage (Ui)			250 V		
		4P	500 V		
Pollution degree		3			
Rated impulse withstand voltage (6 kV				
According to IEC/EN 61008-2-1					
Making and breaking capacity (Im	1500 A				
Surge current withstand (8/20 µs)	No selective S]	3 kÂ		
without tripping	Selective S		5 kÂ		
Conditional rated short-circuit current (Inc/I∆c)	With 100 AgG	fuse	10,000 A		
Additional characteristics					
Degree of protection	Device only		IP20		
(IEC 60529)	Device in modular enclosure		IP40 Insulation class II		
Endurance (O-C)	Electrical	≤63 A	15,000 cycles		
, ,		> 63 A	10,000 cycles		
	Mechanical		20,000 cycles		
Range of test button	30 mA	2P	180270 V AC		
operating voltage		4P	300450 V AC		
	300, 500 mA	2P	140330 V AC		
		4P	220450 V AC		
Impulse withstand according to IE	15 g				
Vibration withstand according to IE	3 g				
Electromagnetic compatibility	According to IEC 61543				
Operating temperature	-25°C to +60°C / -13°F to +140°F				
Storage temperature	-40°C to +85°C / -40°F to +185°F				
Dissipated power	See page 104				

Dielectric test






⚠ To perform any dielectric test,

disconnect terminals: 4P: 1, 3, 5 and 2, 4, 6 2P: 1 and 2 Except for insulation resistance test at 500 V DC between L1, L2, L3 & N all connected, and the earth circuit.


Weight (g / oz)

Residual current circuit breakers				
Туре	iID			
2P	350 g / 12.35 oz			
4P	415 g / 14.64 oz			


Dimensions (mm / inches)

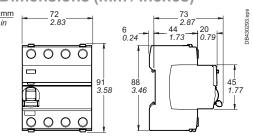

Acti9 iID B-SI type Residual Current Circuit Breakers (RCCB) (cont.)

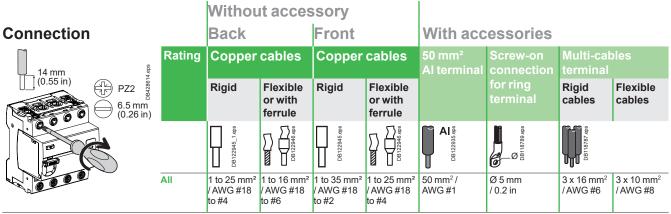

Accessories: see page 75

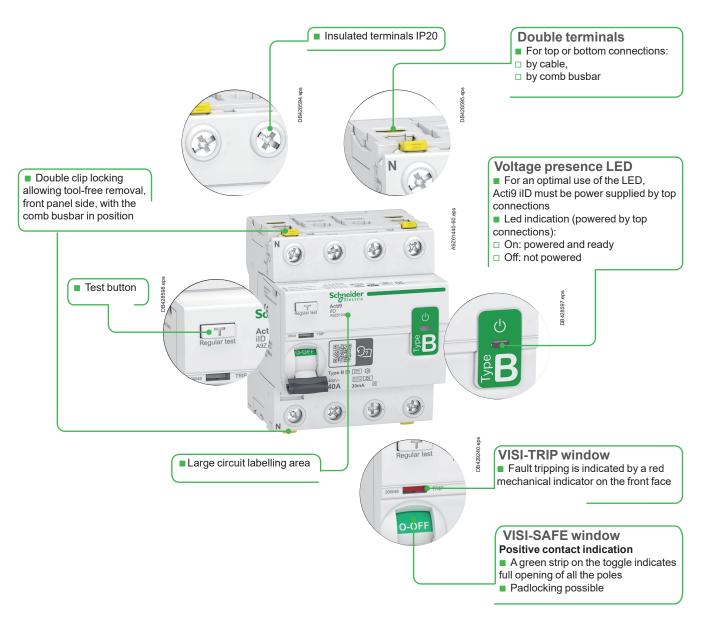

Acti 9 RCCB-ID 125 A Residual Current Circuit Breakers (AC, A, A-SI, B types)













IEC/EN 61008-1 IEC/EN 61008-2-1 IEC/EN 62423 VDE 0664

As per the above standards:

- The Acti9 RCCB-ID 125 A Residual Current Circuit Breakers provide:
- □ protection of persons against electric shock by direct contact (30 mA),
- □ protection of persons against electric shock by indirect contact (≥ 100 mA),
- protection of installations against the risk of fire (300 mA or 500 mA).

A-SI type

It provides increased immunity from electrical interference and polluted or corrosive environments.

B type

- B type RCCBs provide protection against earth fault currents:
- □ sinusoidal AC residual currents (AC type),
- □ pulsed DC residual currents (A type),
- □ multi frequency residual current (F type).
- In addition they protect against smooth direct currents and high frequency alternating currents.
- These earth fault currents can be generated by:
- □ controllers and variable speed drives,
- □ battery chargers and inverters,
- □ backed-up power supplies.

Typical applications include cranes, lifts, HVAC, pumping system, EV or PV.

It is compliant with IEC/EN 62423.

Instantaneous

It ensures instantaneous tripping (without time delay).


Selective S

It ensures total discrimination with a non-selective RCD placed downstream.



■ Compatible with PowerTag Energy (4P only)

Electrical diagrams

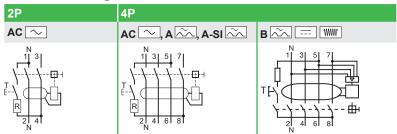

Catalog numbers

Jatan	Catalog Humbers							
RCCB-ID 125 A Residual Current Circuit Breakers								
Туре			2P					Width in 9 mm (0.35 in) mod.
Rating	Sensi	tivity	30 mA	100 mA	300 mA	300 mA S ⁽¹⁾	500 mA	
125 A	AC	\sim	A9R11292	-	-	-	-	4
Туре			4P				Width in 9 mm (0.35 in) mod.	
Rating	Sensi	tivity	30 mA	100 mA	300 mA	300 mA S ⁽¹⁾	500 mA	
125 A	AC	\sim	A9R11492	A9R12492	A9R14492	-	A9R16492	8
	Α	$\hat{\sim}$	A9R21492	-	A9R24492	A9R25492	A9R26492	
	A-SI	r n	A9R31492	-	A9R34492	-	-	
	В	~~ [www	A9R41492	-	A9R44492	A9R45492	A9R46492	
Voltage		2P	230 V AC					
rating (Ue))	4P	400 V AC					
Operating frequency			50 Hz					
PowerTag energy sensors			See PowerLo	gic catalog: PL	SED309005EN			

Acti9 RCCB-ID 125 A Residual Current Circuit Breakers (AC, A, A-SI, B types) (cont.)

A9N16940







OFsp auxiliary

■ Electrical indication: by OFsp auxiliary mounted to the left, it has a double changeover switch indicating the "opened" or "closed" position of the RCCB-ID 125 A.

Accessories

- 2P and 4P sealable screw shield.
- Padlock to lock the RCCB-ID in OFF position.

Catalog numbers

Auxiliary (see	Auxiliary (see page 69)								
Туре			Width in 9 mm (0.35 in) mod.						
Contact OFsp	Voltage	Operating current							
⁹ 22 14 12 14	110 V DC	100 mA to 1 A	A9N16940	1					
12 14 7	230 V AC (AC15)	100 mA to 6 A							

Accessory (see page 80)			
Туре			
Screw shield (set of 10) for upstream or	2P	16938	
downstream	4P	16939	
Padlocking device (set of 4) Diameter of the padlock: 8 mm max		27145	



Indication of the status of the RCCB-ID via the 3-position toggle and front panel indicator


- Opened (toggle in low position and green indicator)
- Closed (toggle in high position and red indicator)
- Tripped on fault (toggle in middle position and green indicator)

OFsp contact status, depending on the position of the Residual **Current Circuit Breaker**

Туре							
RCCB-ID 125 A	Closed	•	-	-			
	Opened	-	•	-			
	Tripped on fault	-	-	•			
Contact OFsp	22/21 12/11	Opened	Closed	Closed			
	14/11	Closed	Opened	Opened			

Connection

By tunnel terminals for:



Туре	Tightening	Copper cables (*)			
	torque	Rigid	Flexible or with ferrule		
	DB112804	DB412805			
RCCB-ID	3 N.m / 26.6 lb.in	1.5 to 50 mm ² / AWG #15 to #1	1.5 to 35 mm ² / AWG #15 to #2		
OFsp	0.8 N.m / 7 lb.in	1 to 1.5 mm ² / AWG #18	to #16		

(*) See Copper Multi-cable connection chapter for more information, page 113.

Acti 9 RCCB-ID 125 A Residual Current Circuit Breakers (AC, A, A-SI, B types) (cont.)

Technical data


Electrical charac				
Insulation voltage (Ui))		400 V AC	
Pollution degree			3	
Rated impulse withsta	and voltage (Uim	4 kV		
According to IEC/E	N 61008-2-1			
Making and breaking	capacity (Im/l∆n	n)	1250 A	
Surge current	AC and A types	(no selective S)	250 Â	
withstand (8/20 µs) without tripping	A-SI and B type	es (no selective S)	3 kÂ	
without tripping	AC, A, A-SI and (selective S)	d B types	3 kÂ	
Conditional rated short circuit current (lnc/l∆c)	With FU 125 A gG fuse		10 000 A	
Behaviour in case of voltage drop	Nit		Residual current protection down to 0 V according to IEC/EN 61008-2-1 § 3.3.4	
Additional charac	cteristics			
Degree of protection	Device only		IP20 IP40 with screw shield	
	Device in modu	ular enclosure	IP40 Insulation class II	
Endurance (O-C)	Electrical		> 2 000 cycles	
	Mechanical		> 5 000 cycles	
Operating temperature	**************************************		-25°C to +40°C / -13°F to +104°F	
Storage temperature	AC, A, A-SI typ	es	-40°C to +85°C / -40°F to +185°F	
	B type		-40°C to +60°C / -40°F to +140°F	
Range of test button	30 mA	2P	160250 V AC	
operating voltage		4P	250440 V AC	
	100, 300, 500 mA	4P	185440 V AC	

Weight (g / oz)

_	Residual Current Circuit Breakers and auxiliary					
Ту	ре	RCCB-ID 125 A	OFsp			
2P		230 g / 8.11 oz	40 g / 1.41 oz			
4P	AC, A and A-SI types	420 g / 14.82 oz	1.41 oz			
	B type	500 g / 17.64 oz				

Dielectric test







⚠ Type B only To perform the dielectric test, disconnect terminals N/1, 3, 5, 7 and N/2, 4, 6, 8.


Weight (g / oz)

Residual current circuit breakers and auxiliary						
Туре	RCCB-ID 125 A	OFsp				
2P	230 g / 8.11 oz	40 g / 1.41 oz				
4P AC, A and A-SI types	420 g / 14.82 oz					
B type	500 g / 17.64 oz					

Dimensions (mm / inches)







Contact OFsp

Life Is On Schneider

Multi9 RCCB-ID Residual Current Circuit Breakers (AC, A-SI types)





IEC/EN 61008-1

As per the above standard:

- RCCB-ID residual current circuit breakers offer the following functions:
- □ protection of persons against electric shock by direct contact (30 mA),
- □ protection of persons against electric shock by indirect contact (300 mA),
- protection of installations against fire risks (300 mA).


A-SI type

The A-SI type provides increased immunity from electrical interference and polluted or corrosive environments.

Catalog numbers

	RCCB-ID residual curre	ent circuit br	eakers				
	Туре		AC ~		A-SI		Width in 9-mm (0.35 in) modules
	2P	Sensitivity	30 mA	300 mA	30 mA	300 mA S	
476	N 1 Rating	25 A	M9R11225	-	-	-	4
DB122476		40 A	M9R11240	M9R14240	M9R31240	M9R35240	
	N 2	63 A	M9R11263	-	-	-	
	4P	Sensitivity	30 mA	300 mA	30 mA	300 mA S	
47.7	N 1 3 5 Rating	40 A	M9R11440	M9R14440	M9R31440	M9R35440	8
DB122477	N 2 4 6	63 A	-	M9R14463	-	M9R35463	
	Voltage rating (Ue)	2P	230 - 240 V				•
		4P	400 - 415 V				
	Operating frequency	50 Hz					
	Auxiliaries	See page 53					
	Accessories		See page 70				
v)	PowerTag energy sensors	See PowerLogic catalog: PLSED309005EN					


Connection

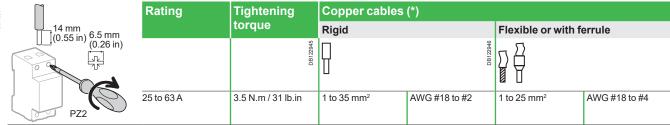


(*) See Copper Multi-cable connection chapter for more information, page 113.

Multi9 RCCB-ID Residual Current Circuit Breakers (AC, A-SI types) (cont.)







Clips on to 35 mm (1.38 in) DIN rail



Any installation position.






Technical data

Main characteris	tics		
Insulation voltage (Ui)	440 V	
Pollution degree		3	
Rated impulse withsta	and voltage (Uimp)	6 kV	
According to IEC/E	N 61008-1		
Making and breaking	capacity (lm/l∆m)	10 ln	
Impulse current	AC type	250 Â	
withstand (8/20 µs) without tripping	A-SI type	3 kÂ	
Rated conditional short-circuit current (Inc/I∆c)	With fuse 100 A	10,000 A	
Behaviour in case of v	voltage drop Vif	Residual current protection down to 0 V according to IEC/EN 61008-1 § 3.3.4	
Additional chara	cteristics		
Degree of protection	Device only	IP20	
(IEC 60529)	Device in modular enclosure	IP40	
		Insulation class II	
Endurance (O-C)	Electrical	2000 cycles	
	Mechanical	20,000 cycles	
Operating	AC type	-5°C to +40°C / 23°F to 104°F	
temperature	A-SI type	-25°C to +40°C / -13°F to 104°F	
Storage temperature		-40°C to +60°C / -40°F to 140°F	
Tropicalization (IEC 6	50068-1)	Treatment 2 (relative humidity 95 % at 55°C / 131°F)	
Dissipated power		See page 104	

Weight (g / oz)

Residual current circuit breakers				
Туре	ID			
2P	230 g / 8.11 oz			
4P 450 g / 15.87 oz				

Dimensions (mm / inches)



Multi9 Vigi C60 – Residual Current Devices – Add-on for C60



IEC/EN 61009-1

As per the above standard:

- Combined with C60 circuit breaker, the Vigi C60 provide:
- □ protection of persons against electric shock by direct contact (30 mA),
- protection of persons against electric shock by indirect contact (300 mA),
- protection of installations against the risk of fire (300 mA).
- The A-SI type provides increased immunity from electrical interference and polluted or corrosive environments.








Catalog numbers


Vigi C60 add-on residual	current devices				
Туре		AC ~		A-SI	Width in 9-mm (0.35 in) modules
2P	Sensitivity	30 mA	300 mA	30 mA	
* * * / / / / / / / / / / / / / / / / /	Rating 63 A	M9V11263	M9V14263	M9V31263	4
3P	Sensitivity	30 mA	300 mA	30 mA	
* * * / / / / / / / / / / / / / / / / /	Rating 63 A	M9V11363	M9V14363	-	7
4P	Sensitivity	30 mA	300 mA	30 mA	
2 4 6 8	Rating 63 A	-	M9V14463	-	7
Voltage rating (Ue)	2P	230 - 240 V		•	•
	3P-4P	400 - 415 V			<u> </u>
Operating frequency		50 Hz			

Connection

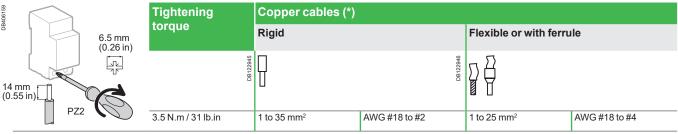

(*) See Copper Multi-cable connection chapter for more information, page 113.

Multi9 Vigi C60 - Residual Current Devices - Add-on for C60 (cont.)

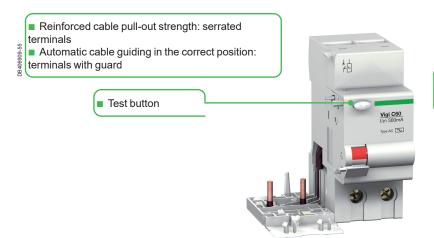

Every circuit breaker combined with a Vigi module remains compatible with the indication and tripping auxiliaries

-40°C to +60°C / -40°F to 140°F

(relative humidity 95 % at 55°C / 131°F)

Treatment 2

See page 104





Indifferent position of installation.





Weight (g / oz)

	Vigi modules 150 g / 4.29 oz	
Туре		
2P	150 g / 4.29 oz	
3P	210 g / 7.40 oz	
4P	210 g / 7.40 oz	

Technical data

Storage temperature


Dissipated power


Tropicalization (IEC 60068-1)


s		
1009-1		
Phase-to-phase	500 V AC	
	3	
l voltage (Uimp)	4 kV	
AC types	250 Â	
A-SI types	3 kÂ	
Nit	Residual current protection down to 0 V according to IEC/EN 61009-1 § 3.3.8	
eristics		
Device only	IP20	
Device in modular enclosure	IP40 Insulation class II	
A-SI types	-25°C to +60°C / -13°F to 140°F	
AC type	-5°C to +60°C / 23°F to 140°F	
	Phase-to-phase I voltage (Uimp) AC types A-SI types Pristics Device only Device in modular enclosure A-SI types	


Railways			
Туре	2P	3P	4P
Mass of combustible material	44.4 g / 1.55 oz	72.6 g / 2.54 oz	72.6 g / 2.54 oz
Type of combustible material	PA6 MD25 FR	& PA6 MD30 FR	
Fire and smoke requirements (EN 45545-2)	HL2 R22 / HL2	R23	
Resistance to shocks and vibrations (IEC 61373)	Category 1Class B		

Dimensions (mm / inches)









Multi9 Vigi N40 – Residual Current Devices – Add-on for N40



Earth leakage protection devices offer the following functions:

- protection of electrical installations against insulation faults
- protection for people against direct and indirect contact
- protection of the installations against fire risks.



IEC/EN 61009-1

As per the above standard:

The Vigi N40N modules, to be combined with a circuit breaker, incorporate in a single enclosure the residual current relay and the toroid.

- The residual current tripping device is electromechanical and operates without an auxiliary source.
- A homogeneous unit in compliance with the EN 61009-1 and EN 61009-2-1 standards, a residual current device retains all the characteristics of the circuit breaker alone; in particular, the thermal tripping threshold of the circuit breaker is retained in the presence of the earth leakage module.

Operation

- When an earth fault occurs, the Vigi module causes automatic opening of the circuit breaker with which it is combined. Fault indication is performed by a red strip on the operating handle for Vigi module resetting.
- Resetting of the earth leakage module is performed, at the user's choice:
- □ either by the reset handle of the circuit breaker (in one operation),
- □ or independently of the circuit breaker (in 2 operations).


A-SI type

The A-SI type provides increased immunity from electrical interference and polluted or corrosive environments.

Catalog numbers

Vigi N40 add-on residual current devices					
Туре	AC ~		A-SI 📉		Width in 9-mm (0.35 in) modules
3P+N Sensitivi	ty 30 mA	300 mA	30 mA	300 mA	
Rating 40 A	-	M9Y14740	M9Y31740	M9Y34740	4
Voltage rating (Ue)	400 - 415 V				
Operating frequency	50 Hz	50 Hz			


Connection




Tightening torque	Copper cables (*)						
	Rigid		Flexible or with ferru	le			
08122945	DB722946						
2 N.m / 18 lb.in	1 to 16 mm ²	AWG #18 to #6	1 to 10 mm ²	AWG #18 to #8			

- (*) See Copper Multi-cable connection chapter for more information, page 113.
 - Where there is a comb busbar tooth, the connection of cables of cross section 16 mm² remains possible.
 - Connection:
 - $\hfill \square$ upstream: direct by comb busbar,
 - □ downstream: by cables.

Multi9 Vigi N40 - Residual Current Devices - Add-on for N40 (cont.)

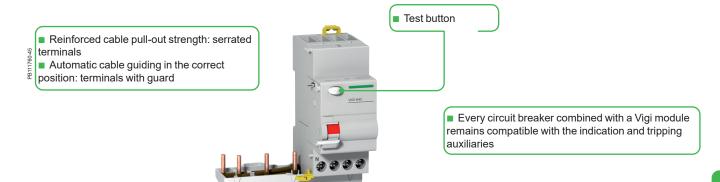




Clip on DIN rail 35 mm (1.38 in)



Indifferent position of installation






Technical data

Main characteristic	s			
According to IEC/EN 6	1009-1			
Insulation voltage (Ui)	Phase-to-phase	440 V AC		
Pollution degree		3		
Rated impulse withstand	l voltage (Uimp)	4 kV		
Behaviour in the event of in TN-S earthing system		Residual breaking and making capacity ($I\Delta m$) identical to the rated breaking capacity (Icn)		
Behaviour in case of voltage drop		Residual current protection down to 0 V according to IEC/EN 61009-1 § 3.3.8		
Additional characte	eristics			
Degree of protection	Device only	IP20		
(IEC 60529)	Device in modular	IP40		
	enclosure	Insulation class II		
Operating temperature	AC type	-5°C to +60°C / 23°F to 140°F		
	A-SI types	-25°C to +60°C / -13°F to 140°F		
Storage temperature		-40°C to +60°C / -40°F to 140°F		
Tropicalization (IEC 60068-1)		Treatment 2 (relative humidity 95 % at 55°C / 131°F)		
Dissipated power		See page 104		

Weight (g / oz)

	Vigi modules
Туре	
3P+N	210 g / 7.40 oz

Dimensions (mm / inches)

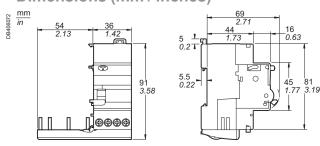

Multi 9 N40 Vigi – RCBO (Residual Current circuit Breakers with Overcurrent protection)





IEC/EN 61009-1

As per the above standard:

- The N40 Vigi residual current device provides complete protection for final circuits (against overcurrents and insulation faults):
- protection for people against electric shocks by direct contacts (30 mA),
- □ protection for people against electric shocks by indirect contacts (300 mA),
- protection of installations against risk of fire (300 mA).


Catalog numbers

N40 \	∕igi 6 kA					
Туре				AC ~		Width in 9-mm (0.35 in) mod.
1P+N	C curve		Sensitivity	30 mA	300 mA	
	N 1	Rating	6 A	M9D11606	-	4
	,L,*	(In)	10 A	M9D11610	M9D14610	
E-\	N 2		16 A	M9D11616	-	
Voltage rating (Ue)		240 V AC				
Operating frequency		50 Hz				
Auxiliaries		See page 53				
Accessories		See page 70				
	Type 1P+N Voltage I Operatin Auxilia	Voltage rating (Ue) Operating frequency Auxiliaries	Type 1P+N C curve Rating (In) Voltage rating (Ue) Operating frequency Auxiliaries	Type 1P+N C curve Sensitivity Rating 6A (In) 6A 10A 16A Voltage rating (Ue) Operating frequency Auxiliaries	Type	Type




Multi9 N40 Vigi – RCBO (Residual Current circuit Breakers with Overcurrent protection) (cont.)


Connection

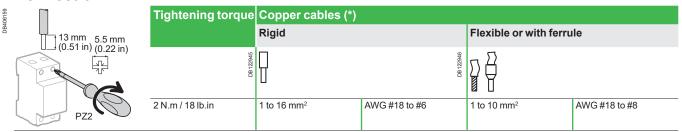


(*) See Copper Multi-cable connection chapter for more information, page 113.



Clip on DIN rail 35 mm (1.38 in)



Indifferent position of installation.

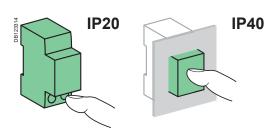

Technical data


Main characteristics				
Insulation voltage (Ui)			400 V AC	
Pollution degree			3	
Rated impulse withstand ve	oltage (Uimp	o)	4 kV	
Setting temperature for rati	ings	50°C / 122°F		
Earth leakage protection w	ith instantar	neous tripping	30, 300 mA	
Magnetic tripping	C curve		8.5 ln (± 20 %)	
8/20 µs impulse withstand	current		250 Â	
According to IEC/EN 610	009-1			
Limitation class			3	
Rated breaking capacity (lo	cn)		6000 A	
Rated residual breaking an	ıd making ca	apacity (I∆m)	6000 A	
Behaviour in case of voltage drop			Residual current protection down to 0 V according to IEC/EN 61009-1 § 3.3.8	
According to IEC/EN 609	947-2			
Breaking capacity (Icu)			6 kA	
Service breaking capacity	(Ics)		75 % lcu	
Additional characteri	stics			
Degree of protection	Device only	y	IP20	
(IEC 60529)	Device in n	nodular	IP40	
	enclosure		Insulation class II	
Endurance (O-C)	Electrical	N40 Vigi ≤ 20A		
		N40 Vigi ≥ 25A	10,000 cycles	
	Mechanica	ıl	20,000 cycles	
Overvoltage category (IEC 60364)			IV	
Operating temperature			-5°C to +60°C / 23°F to 140°F	
Storage temperature			-30°C to +70°C / -22°F to 158°F	
Tropicalization (IEC 60068-1)			Treatment 2 (relative humidity 95 % at 55°C / 131°F)	
Dissipated power			See page 104	

Railways	
Туре	1P+N
Mass of combustible material	45.8 g / 1.59 oz
Type of combustible material	PA6 MD25 FR & PA6 GF20 FR
Fire and smoke requirements (EN 45545-2)	HL2 R22 / HL2 R23
Resistance to shocks and vibrations (IEC 61373)	Category 1
	■ Class B

Weight (g / oz)

Residual current device			
Type N40 Vigi			
1P+N	125 g / 4.41 oz		

Dimensions (mm / inches)



47

Load protection

Multi9 PRD1 75r

Type 1 Surge Protective Devices







The Type 1 range of Surge Protective Device meets the normative withstand capability of current wave type 8/20 µs.

PRD1 75r Surge Protective Devices are fitted with dry contacts to send "end-of-life indication" information.

PRD175r Surge Protective Devices are fitted with easy-to-replace withdrawable cartridges.



PRD1 75r (1P)



PRD1 75r (2P)



PRD1 75r (3P)



PRD1 75r (4P)

UL 1449 4th Edition Recognized, CSA C22.2 No. 269.4-17, 1st Ed

As per the above standard:

The PRD1 75r Surge Protective Device (SPD) is rated UL and CSA Type 1, and is well suited for use installed within electrical equipment. Rated at 200kA SCCR, without additional upstream protection, it can be installed in a variety of installations including service entrance, branch panels and control panel environments. For serviceability considerations, connecting through a disconnector is

Replaceable devices are available, should the device reach end of life due to a surge event or sustained over-voltage.

Mu	Iti9 PRD1 75r Type 1				
Тур	е	Surge Protecti	ve Devices		
	ng configuration	Rated network voltage (VAC)			SCCR (kA)
1P	S-eps	120	75	20	200
	DB43345.eps	240	75	20	200
	Ğ G/N	277 347	75 75	10	200
2P	L1 L2	120/240	75	20	200
	G/N	240/480	75	20	200
3P	L1 L2 L3	240	75	20	200
		480	75	10	200
		120/208	75	20	200
	G/N	277/480	75	20	200
		347/600	75	10	200
		400/690	75	10	200
4P	860 8795558480	120/208	75	20	200
		277/480	75	20	200
		347/600	75	10 (L1/L2/L3) 20 (N-G)	200
		400/690	75	10 (L1/L2/L3) 20 (N-G)	200
		120/240	75	20	200
		240/480	75	20 (L1/L3/N-G) 10 (H-L)	200

Load protection Multi9 PRD1 75r

Type 1 Surge Protective Devices (cont.)



				Associate	d cartridge			SPD onl
VPR (V) Voltage Protection Rating	MCOV (V)	SPD wiring (2-, 3-, 4- or 5- wire)	Catalog number	L1	L2/H-L	L3	G (Ground)	Width in 9 mm (0.35 in) modules
600 (L-N)	175 (L-N)	2	M9L11120	M9LC175	-	-	-	2
900 (L-N)	275 (L-N)	2	M9L21240	M9LC275	-	-	-	2
1000 (L-N)	320 (L-N)	2	M9L31277	M9LC320	-	-	-	2
1500 (L-N)	420 (L-N)	2	M9L41347	M9LC420	-	-	-	2
600 (L-N) 1200 (L-L)	175 (L-N) 350 (L-L)	3	M9L12240	M9LC175	M9LC175	-	-	4
900 (L-N) 1800 (L-L)	275 (L-N) 550 (L-L)	3	M9L22480	M9LC275	M9LC275	-	-	4
900 (L-G) 1800 (L-L)	275 (L-G) 550 (L-L)	4	M9L23240	M9LC275	M9LC275	M9LC275	-	6
1500 (L-L) 1500 (L-G) 3000 (L-L)	550 (L-G) 1100 (L-L)	4	M9L53480	M9LC550	M9LC550	M9LC550	-	6
600 (L-N) 1200 (L-L)	175 (L-N) 350 (L-L)	4	M9L13208	M9LC175	M9LC175	M9LC175	-	6
1000 (L-N) 2000 (L-L)	320 (L-N) 640 (L-L)	4	M9L33480	M9LC320	M9LC320	M9LC320	-	6
1500 (L-N) 2500 (L-L)	420 (L-N) 840 (L-L)	4	M9L43600	M9LC420	M9LC420	M9LC420	-	6
1500 (L-N) 3000 (L-L) 600 (L-N)	550 (L-N) 1100 (L-L) 175 (L-N)	5	M9L53690 M9L17208	M9LC550 M9LC175	M9LC550 M9LC175	M9LC550 M9LC175	M9LC175	8
1200 (L-N) 1200 (L-G) 1200 (L-L) 600 (N-G)	175 (L-N) 175 (L-G) 350 (L-L) 175 (N-G)	5	WI9L17200	M9LC175	M9LC175	INISECT75	M9LC173	0
1000 (L-N) 1500 (L-G) 2000 (L-L) 600 (N-G)	320 (L-N) 495 (L-G) 640 (L-L) 175 (N-G)	5	M9L37480	M9LC320	M9LC320	M9LC320	M9LC175	8
1500 (L-N) 2000 (L-G) 2500 (L-L) 800 (N-G)	420 (L-N) 695 (L-G) 840 (L-L) 275 (N-G)	5	M9L47600	M9LC420	M9LC420	M9LC420	M9LC275	8
1500 (L-N) 2500 (L-G) 3000 (L-L) 1000 (N-G)	550 (L-N) 870 (L-G) 1100 (L-L) 320 (N-G)	5	M9L57690	M9LC550	M9LC550	M9LC550	M9LC320	8
1200 (L-L/L-G) 600 (L-N/N-G) 1500 (H-L/H-G) 800 (H-N)	350 (L-L/L-G) 175 (L-N/N-G) 450 (H-L/H-G) 275 (H-N)	5	M9L17240	M9LC175	M9LC275	M9LC175	M9LC175	8
1500 (L-L/L-G) 800 (L-N) 600 (N-G) 2500 (H-L) 2000 (H-G) 1500 (H-N)	550 (L-L) 450 (L-G) 275 (L-N) 175 (N-G) 825 (H-L) 725 (H-G)	5	M9L27480	M9LC275	M9LC550	M9LC275	M9LC175	8

Version: 2.12 - 19/12/2024

LVCATM9OEM_EN

Multi9 PRD1 75r

Type 1 Surge Protective Devices (cont.)






M9LC275

Spare cartridge							
Un (V) Rated voltage network	I max (kA) Surge Capacity	In (kA)	SCCR (kA)	VPR (V) Voltage Protection Rating	MCOV (V)	Catalog number	
120	75	20	200	600	175	M9LC175	
240	75	20	200	900	275	M9LC275	
277	75	20	200	1000	320	M9LC320	
347	75	10	200	1500	420	M9LC420	
400	75	10	200	1500	550	M9LC550	

Technical data

		PRD1 75r Type 1
Operating frequency		50/60 Hz
Response time		< 25 ns
Short circuit withstand (Isccr)		200 kA
Ground residual current (I _G)	I _G (Neutral-Ground)	< 1 mA
Surge Protective Device technology		MOV
End-of-life indication	Green	Correct operation
	Red	At end of life
	Remote notification	250 V AC / 1 A 125 V AC / 3 A
Operating temperature		-25°C to +60°C
Storage temperature		-40°C to +85°C
Relative humidity		5 % to 90 %
Operating altitude		2000 m
Degree of protection	IP	NEMA 1 built-in
	Impacts	IK05
Pollution degree		3
Standards		UL 1449: 4th Edition Recognized CSA C22.2 No. 269.4-17, 1st Ed

Connection




Wire stripping length		Tightening torque		Tunnel type terminals				
	Dry contacts			Flexible cable or with ferrule	Dry contacts			
Ground	Contacts	Ground	contacts		or with fortule	Rigid cable	Flexible cable	
				DB122845.eps	DB122946.eps	DB122945.eps	DB123007.eps	
10 mm (0.4 in.)	6 mm (0.24 in.)	3 N.m (26.5 Lbf. in.)	0.27 N.m (2.4 Lbf. in.)	6 to 35 mm ² (AWG 10AWG 2)	6 to 25 mm ² (AWG 10AWG 4)	Max. 1.5 mm² (AWG 16)	0.05 to 2.5 mm ² (AWG 30AWG14)	


Weight (g)

Surge protective device						
Туре	PRD1 75r					
1P	154					
2P	340					
3P	522					
4P	703					
Cartridge	82					

Life Is On Schneider

Dimensions












- Compliance with electrical auxiliaries standards
- UL 489 Branch circuit protection.
- C22.2 No. 5 Branch circuit protection.
- UL 1077 Supplementary Protection.
- C22.2 No. 235 Supplementary Protection.
- IEC/EN 60947-2 and IEC/EN 60947-5-1.
- GB/T 14048.2, GB/T 14048.5.
- The electrical auxiliaries provide the remote tripping or position (opened/closed/tripped) indication functions of these devices in the event of a fault.
- They clip on (no tool required) to the lefthand side of the associated device.
- The SD+OF auxiliary is a 2-in-1 product: a mechanical selector switch is used to select one of two contacts: SD or OF.
- The low current auxiliaries OF, SD (2 to 100 mA) are especially dedicated to low current application to report status information to a Programmable Logic Controller (Industry).

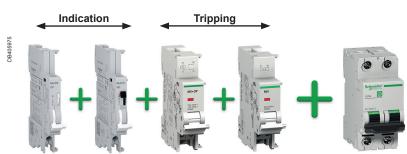

Combination table

Indication auxiliaries		Tripping auxiliaries	Devices
+	+	+	P B116665-18
1 OF + SD/OF maxi	1 OF + SD/OF maxi	1 maxi	1759-19
1 OF maxi	1 (OF + SD/OF or SD or OF) maxi	2 maxi	C60, N40N, N40 Vigi
None	1 (OF + SD/OF or OF) maxi	2 maxi	
1 OF maxi	1 OF maxi	1 maxi	PH100628_SE-18
			OF.S + RCCB-ID, GFP (26923)

Note: iOF and iSD in combination table can be (2 to 100 mA) or (100 mA to 6A) products.

Note Tripping devices must be installed first.

If two tripping devices are used: the MN undervoltage release must be installed first.

Indication auxiliaries: install the SD auxiliary first

Railways		
Туре	MN, MNs, MNx, MX, MX+OF	OF, SD, SD+OF
Mass of combustible material	25.5 g / 0,88 oz	17.6 g / 0.6 oz
Type of combustible material	PA6 GF20 FR	
Fire and smoke requirements (EN 45545-2)	HL2 R22 / HL2 R23	
Resistance to shocks and vibrations (IEC 61373)	Category 1	
	■ Class B	


		Tripping					
Auxiliaries		MN					MNS
Туре		Undervoltage	rologeo				WINE
Type		Officervoitage	Telease				
		Instantaneous					Delayed
	PB100202_SE-30	To the state of th					PB 100203 SE-30
Function							
runction		Trips the devicePrevents device	e with which it is com e closing again until i	ibined when its input voits input voitage is rest	oltage decreases (bet ored	ween 70 % and 35 %	Un).
							No tripping in the event of transient voltage dips (up to 0.2 s)
Wiring diagrams							_
	DB118804	U<					
Utilization		D1 D2 (L+) (N/-)	oppage by normally cl lety of power supply o	losed push button circuits for several ma	chines by preventing	"uncontrolled" restarti	ing
		D1 D2 (L/+) (N/-) Emergency sto Improve the sa	fety of power supply	circuits for several ma			
Utilization Catalog numbers		D1 D2 (L+) (N/-)	oppage by normally cl fety of power supply of M9A27107	closed push button circuits for several ma	chines by preventing	"uncontrolled" restarti M9A26959	ing M9A26963
Catalog numbers Technical specificat	tions	Emergency sto Improve the sa M9A27108	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963
Catalog numbers	tions	Emergency sto Improve the sa M9A27108	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963
Catalog numbers Technical specificat Rated voltage (Ue)	iions VAC VDC	■ Emergency sto ■ Improve the sa M9A27108	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963 220240 -
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency	iions VAC VDC	■ Emergency sto ■ Improve the sa M9A27108 24 24 50/60	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indic	tions V AC V DC Hz	■ Emergency sto ■ Improve the sa M9A27108	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963 220240 - 50/60
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree	tions V AC V DC Hz	■ Emergency sto ■ Improve the sa M9A27108 24 24 50/60 3	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963 220240 - 50/60 3
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indic red Test function Width in 9 mm module	tions VAC VDC Hz	■ Emergency sto ■ Improve the sa M9A27108 24 24 24 50/60 3 On front face	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963 220240 - 50/60 3
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indicred Test function Width in 9 mm module Operating current	tions VAC VDC Hz	Emergency sto Improve the sa M9A27108 24 24 50/60 3 On front face	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963 220240 50/60 3 On front face
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indice red Test function Width in 9 mm module Operating current Number of contacts	ions VAC VDC Hz cator light,	■ Emergency sto ■ Improve the sa M9A27108 24 24 50/60 3 On front face - 2	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963 220240 - 50/60 3 On front face - 2
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indic red Test function Width in 9 mm module Operating current Number of contacts Busbar compatibility	tions VAC V DC Hz cator light,	■ Emergency sto ■ Improve the sa M9A27108 24 24 24 50/60 3 On front face Top	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indic red Test function Width in 9 mm module Operating current Number of contacts Busbar compatibility Operating temperature	tions VAC V DC Hz cator light,	■ Emergency sto ■ Improve the sa M9A27108 24 24 50/60 3 On front face - 2 - Top -25+50°C / -13	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963 220240 - 50/60 3 On front face - 2 - Top -25+50°C / -13122°F
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indic red Test function Width in 9 mm module Operating current Number of contacts Busbar compatibility Operating temperature Storage temperature	tions VAC V DC Hz cator light,	■ Emergency sto ■ Improve the sa M9A27108 24 24 24 50/60 3 On front face Top	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indic red Test function Width in 9 mm module Operating current Number of contacts Busbar compatibility Operating temperature Storage temperature Standards	tions VAC V DC Hz cator light,	■ Emergency sto ■ Improve the sa M9A27108 24 24 50/60 3 On front face - 2 - Top -25+50°C / -13 -40+85°C / -40	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indic red Test function Width in 9 mm module Operating current Number of contacts Busbar compatibility Operating temperature Storage temperature Standards IEC/EN 60947-2	tions VAC V DC Hz cator light,	■ Emergency sto ■ Improve the sa M9A27108 24 24 50/60 3 On front face - 2 - Top -25+50°C / -13 -40+85°C / -40	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963 220240
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indicred Test function Width in 9 mm module Operating current Number of contacts Busbar compatibility Operating temperature Storage temperature Standards IEC/EN 60947-2 IEC/EN 60947-5-1	tions VAC V DC Hz cator light,	■ Emergency sto ■ Improve the sa M9A27108 24 24 24 50/60 3 On front face - 2 - Top -25+50°C / -13 -40+85°C / -40	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963 220240 - 50/60 3 On front face - 2 - Top -25+50°C / -13122°F -40+85°C / -40185°F
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indicred Test function Width in 9 mm module Operating current Number of contacts Busbar compatibility Operating temperature Storage temperature Standards IEC/EN 60947-2 IEC/EN 60947-5-1 UL489	tions VAC V DC Hz cator light,	■ Emergency sto ■ Improve the sa M9A27108 24 24 24 50/60 3 On front face - 2 - Top -25+50°C/-13 -40+85°C/-40	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indice red Test function Width in 9 mm module Operating current Number of contacts Busbar compatibility Operating temperature Standards IEC/EN 60947-2 IEC/EN 60947-5-1 UL489 UL1077	tions VAC V DC Hz cator light,	■ Emergency sto ■ Improve the sa M9A27108 24 24 50/60 3 On front face - 2 - Top -25+50°C / -40 ■ -	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indicred Test function Width in 9 mm module Operating current Number of contacts Busbar compatibility Operating temperature Standards IEC/EN 60947-2 IEC/EN 60947-5-1 UL489 UL1077 C22.2 No. 5	tions VAC V DC Hz cator light,	■ Emergency sto ■ Improve the sa M9A27108 24 24 24 50/60 3 On front face - 2 - Top -25+50°C/-13 -40+85°C/-40	M9A27107	M9A26960	M9A26961	M9A26959 115 - 400	M9A26963
Catalog numbers Technical specificat Rated voltage (Ue) Operating frequency Pollution degree Mechanical state indice red Test function Width in 9 mm module Operating current Number of contacts Busbar compatibility Operating temperature Standards IEC/EN 60947-2 IEC/EN 60947-5-1 UL489 UL1077	tions VAC V DC Hz cator light,	■ Emergency sto ■ Improve the sa M9A27108 24 24 50/60 3 On front face - 2 - Top -25+50°C / -13 -40+85°C / -40	M9A27107	M9A26960	M9A26961	M9A26959	M9A26963

	MNv	MV			MYLOE		
	MNx	MX			MX+OF		
		Shunt relea	ise				
	Independent of the supply voltage				With open/close	ed auxiliary contac	et
PB100205, SE-30		DO-SC PRINTED	PB100199_SE-30				
	 Tripping of the associated device by opening of the control circuit (e.g. push-button, dry contact) 	■ Trips the as	ssociated device	when it is powe	ered on		
	Adrop in the supply voltage does not trip the associated device Alocking push-button control allows the circuit protected (e.g. machine control) to be placed in safety configuration				Includes an indicate the "op associated dev	open/closed conta pened" or "closed" ice	ct (OF contact) to position of the
		<u></u>					
DB40847	Ü	0 0 C2 C1 (L/+) (N/-)		DB408929	14 12 C2 C1 11 (L/+) (N/-)		
	■ Emergency stoppage with fail-safe principle ■ Insensitive to the variation in the control circuit voltage to improve continuity of service Important: Before any servicing operation switch off the mains power supply (voltage presence at terminals E1/E2)	principle	/ stoppage with fa	ail-safe	■ Emergency ■ Remote indi associated dev	stoppage with fail- cation of the positi rice	safe principle on of the
	M9A26969 M9A26971	M9A26476	M9A26477	M9A26478	M9A26946	M9A26947	M9A26948
	230 400	100415	48	1224	100415	48	1224
	-	100130	48	1224	100130	48	1224
	50/60	50/60			50/60		
	3 On front face	3 On front face			3 On front face		
	2	2			2		
	_	_			100 mA mini, 6 ≤ 130 V DC ≤ 240 V AC 277 V AC 415 V AC	A maxi 1 A 48 V AC 2 A 6 A 48 V DC 2 A 3 A 3 A	
		Top			1 NO/NC Top		
	-25+50°C / -13122°F	-25+50°C/	-13122°F		-25+50°C/-	13°F122°F	
	-40+85°C / -40185°F	-40+85°C/			-40+85°C/-		
		-			=		
	-	-			•		
	•	•			•		
	•	-			-		
	- -	-			<u> </u>		
	<u>-</u>	- =			-		
	-				_		

		Indication			
A !!! =! = =				OF.	
Auxiliaries		OF.S		OF	
Туре		Open/closed auxiliary contact		Open/closed auxiliary cor	ntact
	PB100828_8E30	To a local district of the second of the sec	M9A26914	108270M	
Function					
		 ■ Changeover contact indicating the "opened" or "closed" position of the associated device ■ for RCCB-ID ≤ 63 A ⚠ Compulsory for the addition of tripping or indication auxiliaries on a RCCB-ID 		 Changeover contact indicatin position of the associated device Low current auxiliary (2 to 100 report the signalling information Controller (Industry). 	e 0 mA): 2 contacts (1 NO/NC) can
Wiring diagrams	s				
	DP1439863	14 12 11 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	DB438851	14 12 11	
Utilization					
		Remote indication of the position of the associated device		- Domete indication of the neel	
				Remote indication of the posi	tion of the associated device
Catalog numbers	'S	·			M9A26904
Catalog numbers		26923		M9A26914	
Catalog numbers Technical speci Rated voltage (Ue	ifications	·			
Technical special Rated voltage (Ue	ifications e) VAC VDC	26923 24415 24130		M9A26914 24250 24220	M9A26904
Technical speci Rated voltage (Ue	ifications e) VAC	26923		M9A26914 24250	M9A26904 24415
Technical speci Rated voltage (Ue Operating frequency	ifications e) VAC VDC	26923 24415 24130 50/60		M9A26914 24250 24220 50/60	M9A26904 24415
Technical speci Rated voltage (Ue Operating frequency Pollution degree	ifications e) VAC VDC Hz	26923 24415 24130		M9A26914 24250 24220	M9A26904 24415
Technical speci Rated voltage (Use Operating frequency Pollution degree Mechanical state red	ifications e) VAC VDC Hz	26923 24415 24130 50/60		M9A26914 24250 24220 50/60 3	M9A26904 24415
Technical specification Rated voltage (Use Operating frequency Pollution degree Mechanical state red Test function	ifications e) VAC VDC Hz indicator light,	26923 24415 24130 50/60 3		M9A26914 24250 24220 50/60 3 - On front face	M9A26904 24415
Technical speci Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mc	e) VAC VDC Hz indicator light,	24415 24415 24130 50/60 3		M9A26914 24250 24220 50/60 3 - On front face 1	M9A26904 24415 24130
Technical specification Rated voltage (Use Operating frequency Pollution degree Mechanical state red Test function	e) VAC VDC Hz indicator light,	26923 24415 24130 50/60 3 - 1 100 mA to 6 A		M9A26914 24250 24220 50/60 3 - On front face	M9A26904 24415 24130
Technical speci Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mc	e) VAC VDC Hz indicator light,	24415 24415 24130 50/60 3		M9A26914 24250 24220 50/60 3 - On front face 1	M9A26904 24415 24130
Technical speci Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mc	ifications e) VAC VDC Hz indicator light, odules t 24 V DC 48 V DC	24415 24415 24130 50/60 3 - - 1 100 mA to 6 A 100 mA to 2 A		M9A26914 24250 24220 50/60 3 - On front face 1	M9A26904 24415 24130 100 mA to 6 A 100 mA to 2 A
Technical speci Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mc	indicator light, odules t 24 V DC 48 V DC 110 V DC 110 V DC 130 V DC	26923 24415 24415 24130 50/60 3 - 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A		M9A26914 24250 24220 50/60 3 - On front face 1	M9A26904 24415 24130 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A
Technical speci Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mc	indications e) VAC VDC Hz indicator light, odules t 24 V DC 48 V DC 60 V DC 110 V DC 130 V DC 220 V DC ≥230 V AC 240 V AC 250 V AC	26923 24415 24415 24130 50/60 3 - 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A		M9A26914 24250 24220 50/60 3 - On front face 1	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A
Technical speci Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mc	indications e) VAC VDC Hz indicator light, odules t 24 V DC 48 V DC 60 V DC 110 V DC 130 V DC 220 V DC 240 V AC 240 V AC	26923 24415 24130 50/60 3 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA	M9A26904 24415 24130 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A
Technical speci Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mc Operating current	## A C C C C C C C C C C C C C C C C C C	26923 24415 24130 50/60 3 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A - 100 mA to 6 A		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A
Technical speci Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mc Operating current Number of contact Connections - ten	## A C C C C C C C C C C C C C C C C C C	24415 24415 24130 50/60 3 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A - 100 mA to 6 A		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A
Technical speci Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mc Operating current Number of contact Connections - ten Wiring position	indications e) VAC VDC Hz Indicator light, odules t 24 V DC 48 V DC 60 V DC 110 V DC 130 V DC 220 V DC ≤ 230 V AC 240 V AC 250 V AC 277 V AC 415 V AC ots minals	26923 24415 24130 50/60 3 - 1 100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A - 100 mA to 6 A		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A
Technical specification Rated voltage (Use Rated voltage (Use Rated voltage (Use Rated voltage (Use Rated Voltage Requency Pollution degree Mechanical state red Test function Width in 9 mm mode Operating current Voltage Rated Ra	indications e) VAC VDC Hz indicator light, odules t 24 V DC 48 V DC 110 V DC 130 V DC 220 V DC 220 V DC 240 V AC 250 V AC 277 V AC 415 V AC cts minals	26923 24415 24415 24130 50/60 3 - - 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A - 100 mA to 6 A		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA - 1 NO/NC Screw clamp Bottom Top	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A
Technical speci Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mc Operating current Number of contact Connections - ten Wiring position Busbar compatibi Operating temper	ifications e) VAC VDC Hz Indicator light, odules t 24 V DC 48 V DC 60 V DC 110 V DC 130 V DC 220 V DC ≤ 230 V AC 240 V AC 250 V AC 415 V AC ots minals	26923 24415 24130 50/60 3 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A - 100 mA to 6 A - 100 mA to 6 A		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA - 1 NO/NC Screw clamp Bottom Top -25+70°C / -13°F158°F	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A
Technical speci Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mo Operating current Number of contact Connections - tern Wiring position Busbar compatibi Operating temper Storage temperat	ifications e) VAC VDC Hz Indicator light, odules t 24 V DC 48 V DC 60 V DC 110 V DC 130 V DC 220 V DC ≤ 230 V AC 240 V AC 250 V AC 415 V AC ots minals	26923 24415 24415 24130 50/60 3 - - 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A - 100 mA to 6 A		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA - 1 NO/NC Screw clamp Bottom Top	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A
Rated voltage (Use Coperating frequency Pollution degree Mechanical state red Test function Width in 9 mm mc Operating current Number of contact Connections - tent Wiring position Busbar compatibit Operating temperat Standards	indications by VAC VDC Hz Indicator light, Ind	26923 24415 24415 24130 50/60 3 - 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A - 100 mA to 6 A 1NO/NC Screw clamp Bottom Top -25+50°C / -13°F122°F -40+85°C / -40°F185°F		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA - 1 NO/NC Screw clamp Bottom Top -25+70°C / -13°F158°F -40+85°C / -40°F185°F	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A
Technical speci Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mo Operating current Number of contact Connections - ten Wiring position Busbar compatibi Operating temper Storage temperat Standards IEC/EN 60947-5-	### A C C C C C C C C C C C C C C C C C	24415 24415 24130 50/60 3 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A - 100 mA to 6 A - 100 mA to 3 A 1 NO/NC Screw clamp Bottom Top -25+50°C / -13°F122°F -40+85°C / -40°F185°F		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA - 1 NO/NC Screw clamp Bottom Top -25+70°C / -13°F158°F -40+85°C / -40°F185°F	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A
Rated voltage (Ue Operating frequency Pollution degree Mechanical state red Test function Width in 9 mm mo Operating current Number of contact Connections - tent Wiring position Busbar compatibi Operating temperat Standards IEC/EN 60947-5- IEC/EN 60947-5-	### A C C C C C C C C C C C C C C C C C	26923 24415 24415 24130 50/60 3 - 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A - 100 mA to 6 A 1NO/NC Screw clamp Bottom Top -25+50°C / -13°F122°F -40+85°C / -40°F185°F		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA - 1 NO/NC Screw clamp Bottom Top -25+70°C /-13°F158°F -40+85°C /-40°F185°F	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A
Number of contact Connections - term Wiring position Busbar competition Busbar competition Standards IEC/EN 60947-5-UL489	### A C C C C C C C C C C C C C C C C C	24415 24415 24130 50/60 3 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A - 100 mA to 6 A - 100 mA to 3 A 1 NO/NC Screw clamp Bottom Top -25+50°C / -13°F122°F -40+85°C / -40°F185°F		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA - 1 NO/NC Screw clamp Bottom Top -25+70°C / -13°F158°F -40+85°C / -40°F185°F	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A
Number of contact Connections - term Wiring position Busbar compatibio Operating temperat Standards IEC/EN 60947-5-UL489 UL1077	### A C C C C C C C C C C C C C C C C C	24415 24415 24130 50/60 3 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A - 100 mA to 6 A - 100 mA to 3 A 1 NO/NC Screw clamp Bottom Top -25+50°C / -13°F122°F -40+85°C / -40°F185°F		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA - 1 NO/NC Screw clamp Bottom Top -25+70°C /-13°F158°F -40+85°C /-40°F185°F	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A
Number of contact Connections - term Wiring position Busbar competition Busbar competition Standards IEC/EN 60947-5-UL489	### A C C C C C C C C C C C C C C C C C	24415 24415 24130 50/60 3 1 100 mA to 6 A 100 mA to 2 A 100 mA to 1.5 A 100 mA to 1 A - 100 mA to 6 A - 100 mA to 3 A 1 NO/NC Screw clamp Bottom Top -25+50°C / -13°F122°F -40+85°C / -40°F185°F		M9A26914 24250 24220 50/60 3 - On front face 1 2 mA to 100 mA - 1 NO/NC Screw clamp Bottom Top -25+70°C / -13°F158°F -40+85°C / -40°F185°F	100 mA to 6 A 100 mA to 1.5 A 100 mA to 1 A 100 mA to 1 A

GB/T 14048.5

	SD		OF+SD/OF
	Fault indicating contact		Double open/closed or fault indicating contact
M9A26917	20092V6W	60892VBW	
	 Changeover contact indicating the position of the as 	esociated device in the event of:	The OF+OF/SD quvilianvis a 2 in 1 product; via a machanical solector
	electrical fault action on the tripping auxiliary Low current auxiliary 2 to 100 mA): 2 contacts (1 NC information to a Programmable Logic Controller (Indus Not compatible with a RCCB-ID ≤ 63 A. Use a SE	D/NC) can report the signalling stry).	■ The OF+OF/SD auxiliary is a 2-in-1 product: via a mechanical selector switch, it provides 2 contacts, OF+SD or OF+OF
DB438952	92 94 91	DB118912	14 12 11
	= Demosts facult triuming indication of the associated de	n de e	- Domete position and/or fault tripping indication of the accesiated device
	 Remote fault tripping indication of the associated de 	evice	 Remote position and/or fault tripping indication of the associated device Not compatible with comb busbar
	M9A26917	M9A26907	M9A26909
	24250	24415	24415
		24130	24130
	50/60		50/60
	3		3
	On front face		On front face
	On front face		On front face
	1		1
	2 mA to 100 mA	100 mA to 6 A	100 mA to 6 A
		100 mA to 2 A	100 mA to 2 A
		100 mA to 1.5 A	100 mA to 1.5 A
		100 mA to 1 A	100 mA to 1 A
		_	<u> </u>
		- 100 mA to 6 A	1- 100 mA to 6 A
	-	100 mA to 3 A	100 mA to 3 A
	1 NO/NC		 2 NO/NC
	Screw clamp		Screw clamp
	Bottom		Top and bottom
	Тор		-
	-25+70°C / -13°F158°F		-25+70°C / -13°F158°F
	-40+85°C/-40°F185°F		-40+85°C / -40°F185°F
			•
	•	-	-
	•		
	•		•
	•		•
	•		•
	•		•

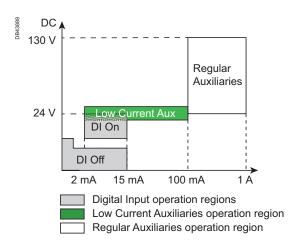


How to generate summary data using OF or SD contacts of low current electrical auxiliaries

- Electrical summary of the OF signals or electrical summary of the SD signals can be generated with low current indication auxiliaries (2 mA to 100 mA) wired as a daisy chain
- The OF connections and the SD connections must not be connected on the same daiy chain: 2 separate daisy chains are required to report OF information on the one hand and SD information on the other
- A daisy chain is made of up to 100 OF contacts or 100 SD contacts
- A daisy chain is connected locally to the PLC or the Controller (inside the same switchboard).


OF contacts within a daisy chain

- OF contacts are Normally Open (NO)
- The electrical summary of the OF signals can be done by cabling in series all OF signals
- Any open position opens the daisy chain and can be detected.

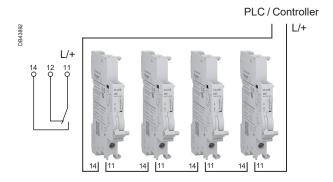

SD contacts within a daisy chain

- SD contacts are Normally Closed (NC)
- The electrical summary of the SD signals can be done by cabling in series all SD signals
- Any SD signal opens the daisy chain and can be detected.

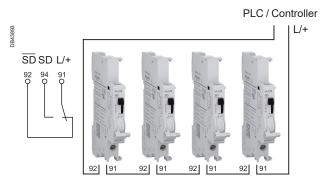



4 mm (0.16 inch) PZ1 9 mm (0.35 inch)


Connection


Type	Tightening torque	Copper cables
		Rigid
	DB122946	
Indication and tripping auxiliaries	1 N.m (9 lb.in)	2 cables, 1.5 mm² / #16 AWG or
		1 cable, 2.5 mm² / #14 AWG

Dimensions (mm / inches)












Clip on DIN rail 35 mm.




Indifferent position of installation.

Weight (g / oz)

Electrical auxiliaries				
Туре				
MN		66 g / 2.32 oz		
MNS		66 g / 2.32 oz		
MNx		73 g / 2.57 oz		
MX		60 g / 2.32 oz		
MX+OF		65 g / 2.12 oz		
OF.S		33 g / 1.16 oz		
OF	2 mA to 100 mA	29 g / 1.02 oz		
	100 mA to 6 A	30 g / 1.06 oz		
SD	2 mA to 100 mA	29 g / 1.02 oz		
	100 mA to 6 A	30 g / 1.06 oz		
SD+OF		38 g / 1.34 oz		

C60BP or C60BPR association

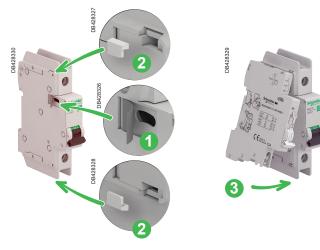



- The electrical auxiliaries are combined with iID residual current circuit breakers; they enable tripping or remote indication of their position (opened/closed/tripped) upon an electrical fault.
- The iOF/SD+OF auxiliary is a 2-in-1 product: via a mechanical selector switch, it provides two contacts, OF+SD or OF+OF.
- The low current auxiliaries iOF, iSD, iSD+OF (2 to 100 mA) are especially dedicated to low current application to report status information to a Programmable Logic Controller (Industry) or a Controller (Building/BMS).
- The iOF+SD24 auxiliary can report opened/closed (OF) status information and intentional or fault tripping of the associated device (SD) to the Acti9 Smartlink, a Programmable Logic Controller (Industry) or a Controller (Building/BMS), via the Ti24 interface (24 V DC).

Tripping auxiliaries:

IEC/EN 60947-2

- iMN: undervoltage release
- iMNs: delayed undervoltage release
- iMNx: undervoltage release, independant from supply voltage
- iMX: shunt release
- iMX+OF: shunt release with open/closed contact.

EN 50550

iMSU: overvoltage release.

Indication auxiliaries:

IEC/EN 60947-5-1

- iOF: open/closed contact
- iSD: fault indicating contact
- iOF/SD+OF: open/closed contact and switchable OF or SD function

IEC/EN 60947-5-4

- Auxiliaries dedicated to low current applications (PLC...)
- □ iOF Low Current: open/closed contact
- □ iSD Low Current: fault indicating contact
- □ iSD+OF Low Current: open/closed contact and fault indicating SD contact
- iOF+SD24: open/closed contact OF and fault indicating contact SD with Ti24 interface.

4


	Tripping						
Auxiliaries	iMN				iMNs	iMNx	
Туре	Undervoltage	release					
.,,,,	Instantaneous	71010400			Delayed	Independent of the s	unnly voltage
	Ilistalitalieous				Delayed	independent of the s	uppry voltage
PB10447/35	10 a 5 a			PB104478-35	Scherbing	100000	
Function							
	Trips the device (between 70 % and Prevents device)	and 35 % Ur	n).			 Tripping of the ass opening of the contro (e.g. push-button, dr 	ol circuit y contact)
					Not tripping on transient voltage dip (up to 0.2 s)	the associated devic A locking push-bu	tton control allows the . machine control) to be
Wiring diagrams					•		
100	D1 D2 (L/+) (N/-)					E1 E2 N U	
Use	I = 5				4	I= ===================================	
	 Emergency stoppage by normally closed push button Improve the safety of power supply circuits for several machines by "uncontrolled" restarting 			eral machines by preventing	Insensitive to cont variation to increase Important: Before an switch off the mains presence at terminals	rol circuit voltage service continuity y servicing operation s power supply (voltage s E1/E2)	
Catalog numbers	A9A26960		_		A9A26963	A9A26969	A9A26971
iID double terminals	•				•	•	•
Technical specifications							
Rated voltage (Ue)	220240 V AC	24 V AC	48 V AC	115 V AC	220240 V AC	220240 V AC	380415 V AC
	-	24 V DC	48 V CC		-	-	
Standardised operating and non-response to voltage times (Ua)*	_	_	_	_	-	-	_
Maximum operating time	_	-	-	-	-	-	_
Minimum non-response time	-	-	-	-	-	-	_
Operating frequency	50/60 Hz			400 Hz	50/60 Hz	50/60 Hz	
Red mechanical indicator Test function	On front face				On front face	On front face	
Width in 9 mm modules	-				2	2	
Operating current				- -	-		
Number of contacts	1-				-	-	
Busbar compatibility	Top and bottom				Top and bottom	Тор	
Operating temperature	-35+70°C/-3				-35+70°C/-31°F158°F	-35+70°C / -31°F158°F	
Storage temperature	-40+85°C/-40°F185°F				-40+85°C / -40°F185°F	-40+85°C/-40°F	.185°F

^{*(}Ua)
Voltages measured between the phase and the neutral conductor, at which the iMSU device must control the associated protective device.

	iMSU					iMX	iMX+OF				
	Overvoltage release				Shunt release						
						With open/closed auxiliary contact					
PB10479-35	PBIO4479-35				5 S S S S S S S S S S S S S S S S S S S						
	■ Switches off the which it is combined voltage is exceed network, use three switches of the	ned, in the o	event that the neutral). Fo	ne phase/ne or a four-pha	eutral	■ Trips the assoc	iated device when i	·			
								Includes an oper to indicate the "ope the device			
DB118806	OB172012				U > C2 C1 (L/+) (N/-)		14 12 C2 C1 (U-) (N/-)				
	Protection of equipment against overvoltages on the electrical network (neutral conductor break) Voltage monitoring between phase and neutral conductors				■ Emergency sto open push button	ppage by normally	■ Emergency stop ■ Remote indication the associated devi	n of the position of			
	A9A26500					A9A26476	A9A26478	A9A26946	A9A26947	A9A26948	
	230 V AC					100415 V AC	1224 V AC	100415 V AC	48 V AC	1224 V A	С
	-					110130 V DC	1224 V DC	110130 V DC	48 V DC	1224 V D	
	255 V AC	275 V AC	300 V AC	350 V AC	400 V AC	-	_	_	_	-	
	No tripping	15 s	5 s	0.75 s	0.20 s	-	-	-	_	-	
	3 s 1 s 0.25 s 0.07 s 50/60 Hz			0.07 s			- - - 50/60 Hz				
	On front face				On front face		On front face				
	-				-		-				
	2				2		2				
	-				-			48 V AC 2 A 48 V DC 2 A		6 A 6 A	
	_					_		415 V AC 3 A 1 NO/NC			
	Top and bottom					Top and bottom		Top			
	-35+70°C/-31	1°F158°F				-35+70°C / -31°	F158°F	-35+70°C / -31°F	158°F		
	-40+85°C/-40					-40+85°C/-40°		-40+85°C/-40°F			
	1 00 07 10 1111100 1										

	Indication			
Auxiliaries	iOF		iSD	
Туре	Open/closed auxiliary cor	ntact	Fault indicating contact	
**	j '			
S AAA/SB115		B man land life of the control of th	8	
Function				
	the device		Changeover contact indicates position of the device upon: electrical fault action on tripping auxiliary Same indication as VISI-TRIP Low current auxiliary (2 to 100 mA): 1 contact (1 NO/ NC) can report the signalling information to a Programmable Logic Controller (Industry) or a Controller (Building/BMS)	
Wiring diagrams			•	
Use	Remote indication of the posi	ition of the associated device	Remote indication of tripping	upon a fault of the associated
			device	
Catalog numbers	A9A26915	A9A26905	A9A26916	A9A26906
iID double terminals	•	•	•	•
Technical specification	s			
Rated voltage (Ue)	24250 V AC	24415 V AC	24250 V AC	24415 V AC
	24220 V DC	24130 V DC	24220 V DC	24130 V DC
Operating frequency	50/60 Hz		50/60 Hz	
,				
Red mechanical indicator	-		On front face	
Test function	On toggle		On toggle	
Width in 9 mm modules	1		1	
Operating 24 V DC	2 mA to 100 mA	100 mA to 6 A	2 mA to 100 mA	100 mA to 6 A
current 48 V DC		100 mA to 2 A]	100 mA to 2 A
60 V DC	_	100 mA to 1.5 A	_	100 mA to 1.5 A
130 V DC	_	100 mA to 1 A	_[100 mA to 1 A
220 V DC		-	_	-
24240 V AC	·	100 mA to 6 A		100 mA to 6 A
415 V AC	- 1 NO (OF) / NO	100 mA to 3 A	- 1 NO (NC (SD)	100 mA to 3 A
Number of contacts	1 NO (OF) / NC	1 NO (OF) / NC	1 NO / NC (SD)	1 NO / NC (SD)
Connections - terminals	Screw clamp		Screw clamp	
Wiring position	Тор	Тор	Тор	Тор
Busbar compatibility	Bottom	Bottom	Bottom	Bottom
Operating temperature Storage temperature	-25+70°C / -13°F158° -40+85°C / -40°F185°F	-35+70°C/-31°F158°F	-25+70°C / -13°F158° -40+85°C / -40°F185°F	-35+70°C / -31°F158°F

	iSD+OF	iOF/SD+OF	iOF+SD24
	Open/closed and fault indicating contact	Double open/closed or fault indicating contact	Double open/closed and fault indicating contact
A9A26919	PBI0405-35	PRIOTEG-35	
	■ The iSD+OF auxiliary is a 2-in-1 product: it provides an OF+SD contact ■ 2 contacts (2 NO/NC) can report the signalling information of the associated device to a Programmable Logic Controller (Industry) or a Controller (Building/BMS)	■ The iOF/SD+OF auxiliary is a 2-in-1 product: via a mechanical selector switch, it provides 2 contacts, OF+SD or OF+OF	■ 2 contacts (1 NO + 1 NC) can report the signalling information of the associated device to the Acti9 Smartlink, a Programmable Logic Controller (Industry) or a Controller (Building/BMS): □ electrical fault □ actuation of the tripping auxiliary □ "Opened" or "Closed" position of the associated device
13	14 12 11 0 0 0 0	14 12 11	OF \$\overline{80}\$ 24 VDC/VCC
DB118813	21881180	DB478843	
	SD+OF	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
	190.01		
	Remote indication of position and tripping upon a fault of the associated device	 Remote indication of position and/or tripping upon a fault of the associated device 	Remote indication of position and tripping upon a fault of the associated device
	A9A26919	A9A26909	A9A26897
	■ if no comb busbar	■ if no comb busbar	•
	24250 V AC	24415 V AC	-
	24220 V DC	24130 V DC	24 V DC
	50/60 Hz	50/60 Hz	-
	On front face	On front face	On front face
	On toggle	On toggle	On toggle
	1 2 mA to 100 mA	100 mA to 6 A	1 2 mA to 100 mA
	2 MA to 100 MA	100 mA to 6 A 100 mA to 2 A	2 mA to 100 mA
	•	100 mA to 1.5A	-
		100 mA to 1 A	-
		100 m \(\tau \) 6 \(\lambda \)	-
	-	100 mA to 6 A 100 mA to 3 A	- -
	1 NO (OF) / NC	1 NO (OF)/NC 1 NO (OF)/NC	1 NO (OF) + 1 NC (SD)
	1 NO / NC (SD)	1 NO (OF) / NC 1 NO / NC (SD)	
	Screw clamp	Screw clamp	Spring-loaded Ti24 (sold separately)
		Top and bottom	Ton
	Top and bottom	Top and bottom	Top Bottom
		Top and bottom35+70°C / -31°F158°F	Top Bottom -25+70°C / -13°F158°

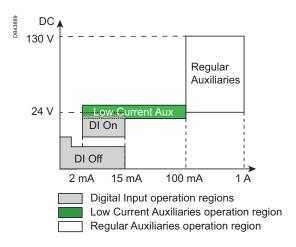


How to generate summary data using OF or SD contacts of low current electrical auxiliaries

- Electrical summary of the OF signals or electrical summary of the SD signals can be generated with low current indication auxiliaries (2 mA to 100 mA) wired as a daisy chain
- The OF connections and the SD connections must not be connected on the same daiy chain: 2 separate daisy chains are required to report OF information on the one hand and SD information on the other
- A daisy chain is made of up to 100 OF contacts or 100 SD contacts
- A daisy chain is connected locally to the PLC or the Controller (inside the same switchboard).


OF contacts within a daisy chain

- OF contacts are Normally Open (NO)
- The electrical summary of the OF signals can be done by cabling in series all OF signals
- Any open position opens the daisy chain and can be detected.

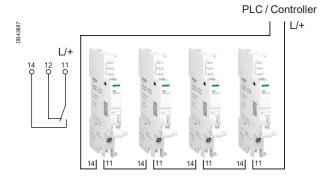


SD contacts within a daisy chain

- SD contacts are Normally Closed (NC)
- The electrical summary of the SD signals can be done by cabling in series all SD signals
- Any SD signal opens the daisy chain and can be detected.

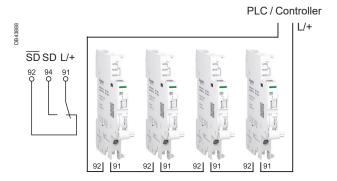


Connection





Туре	Tightening torque	Copper cable	s	Multi-cables	
		Rigid	Flexible	Rigid	Cables with ferrule
	DB122945	DB123007	DB123011	DB123008	
Indication auxiliaries	1 N.m / 8.85 lb.in	1 to 4 mm ² / AWG #18 to #12	0.5 to 2.5 mm ² / AWG #20 to #14	2 x 2.5 mm ² / 1 x AWG #14	2 x 1.5 mm² / 1 x AWG #16
Tripping auxiliaries	1 N.m / 8.85 lb.in	1 to 6 mm ² / AWG #18 to #10	0.5 to 4 mm ² / AWG #20 to #12	2 x 2.5 mm ² / 1 x AWG #14	2 x 2.5 mm² / 1 x AWG #14

Ti24 connector connection

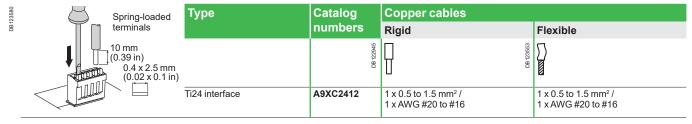

Ti24 prefabricated cables connection

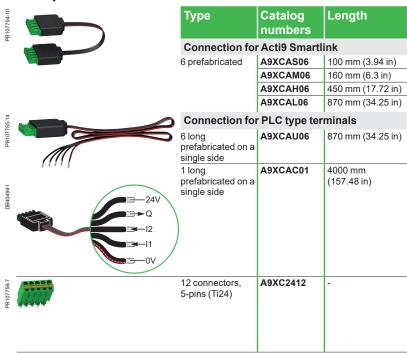



Clip on DIN rail 35 mm (1.38 in)




Indifferent position of installation


Technical data


Weight (g / oz)


Electrical auxiliaries				
Туре				
iMN	69 g / 2.43 oz			
iMNs	72 g / 2.54 oz			
iMNx	79 g / 2.79 oz			
iMSU	68 g / 2.4 oz			
iMX	64 g / 2.26 oz			
iMX+OF	68 g / 2.4 oz			
iOF	32 g / 1.13 oz			
iSD	33 g / 1.16 oz			
iOF/SD+OF	43 g / 1.52 oz			
iOF+SD24	25 g / 0.88 oz			


Dimensions (mm / inches)













iMN, iMNs, iMNx, iMSU, iMX, iMX+OF

Electrical auxiliaries for Acti9 RCCB-ID 125 A

- The electrical auxiliaries provide the remote position (opened/closed) indication functions of these devices in the event of a fault.
- They clip on (no tool required) to the lefthand side of the associated device.

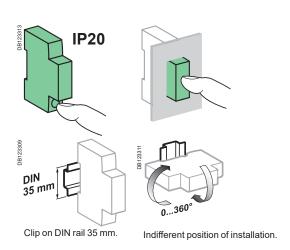



(0.35 inch)


Connection

Type Tightening		Copper cables		
	torque	Rigid		
OFsp	0.8 N.m (7 lb.in)	1 cable, 1.5 mm ² /#16 AWG		

Weight (g / oz)

Electrical auxiliary	
OFsp	40 g / 1.41 oz

Dimensions (mm / inches)

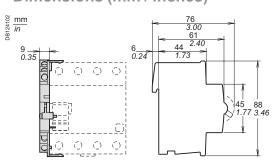

IEC/EN 60947-5-1

OFsp: open/closed contact

Combination table

Indication auxiliary	Devices
1 OFsp	ASRA1482
	RCCB-ID 125 A,

Indication

	Illulcation
Auxiliaries	OFsp
Туре	Open/closed auxiliary contact
	OPSSINOY OPSSINOY
Function	

- Changeover contact indicating the "opened" or "closed" position of the associated device
- for RCCB-ID 125 A
- ⚠ Compulsory for the addition of indication auxiliaries on a RCCB-ID

Wiring diagrams



240 V AC 250 V AC 277 V AC

Utilization		
		Remote indication of the position of the associated device
Catalog numbers		A9N16940
Technical specifi	cations	
Rated voltage (Ue)	VAC	230
	V DC	110
Operating frequency	Hz	50
Pollution degree		3
Mechanical state indicator light, red		-
Test function		-
Width in 9 mm mod	lules	1
Operating current	24 V DC	-
	48 V DC	
	60 V DC	
	110 V DC	100 mA to 1 A
	130 V DC	-
	220 V DC	
	≤ 230 V AC	100 mA to 6 A

1 NC + NC/NO
Screw clamp
Top and bottom
-
-25+40°C / -13°F122°F
-40+85°C / -40°F185°F

Accessories for MCB and RCD, except Acti9 iID RCCB

Installation

Rotary handle			Plug-in base		
PB100137_SE-24 PB100138_SE-24					
			•		
Front or side control of 2, 3 and 4-pole circuit breakers Degree of protection: IP40 A complete rotary handle consists of: a circuit breaker operating sub-assembly, cat. no. 27046, a handle cat. no. 27047 or a handle cat. no. 27048 Installation: the circuit breaker operating sub-assembly cat. no. 27046 is fixed to the circuit breaker operating sub-assembly cat. no. 27046 is fixed to the removable handle cat. no. 27047 is mounted on the removable front panel or on the enclosure door the fixed handle cat. no. 27048 is fixed to the front or side panel of the enclosure			Allows a circuit breaker to be quickly removed or replaced, without touching the connections Degree of protection: IP20 It consists of: a base to be fixed to a rail (or panel) 2 "blades" to be fixed in the device terminals Connection: tunnel terminals for cables up to 50 mm² (rigid) or 35 mm² (flexible) Installation: on backplate on a horizontal rail Centreline between two rows: 200 mm (7.87 in) Only on the circuit breaker, without a Vigi device or auxiliary Padlocking option: 8 mm (0.31 in) diameter, padlock not supplied)		
27047	27048	27046	26996		
Removable extended handle	Fixed handle	Operating sub-assembly	(1 per pole)		
1	1	1	1		
ollowing devices:					
■ 2P, 3P			-		
■ 2P, 3P, 4P					
■ 2P					
-			•		
■ 2P, 3P, 4P			•		
■ 3P+N			_		
■ 3P+N			<u> </u>		
■ 3P+N -			-		
25.100.150	Front or side control of 2, Degree of protection: IP. A complete rotary handle a circuit breaker operating the circuit breaker operating the circuit breaker operating the circuit breaker operating the circuit breaker or on the enclosure door the fixed handle cat. no. 27047 Removable extended handle 1 bllowing devices: 2P, 3P 2P, 3P 2P, 3P, 4P 2P - 2P, 3P, 4P	Front or side control of 2, 3 and 4-pole circuit breake Degree of protection: IP40 A complete rotary handle consists of: a circuit breaker operating sub-assembly, cat. no. 270 a handle cat. no. 27047 or a handle cat. no. 27048 Installation: the circuit breaker operating sub-assembly cat. no. 2 the circuit breaker the removable handle cat. no. 27047 is mounted on tor on the enclosure door the fixed handle cat. no. 27048 is fixed to the front or 27047 Removable extended handle handle 27048 Fixed handle 1 1 27049 27049 27049 27049 27048 27049 27049 27049 27049 27049 27049 27049 27048 27049 27049 27049 27049 27049 27048 27049 27049 27049 27048 27049 27049 27049 27049 27049 27049 27049 27049 27049 27049 27048 27048 27049 27049 27049 27048 27048 Fixed handle 1	Front or side control of 2, 3 and 4-pole circuit breakers Degree of protection: IP40 A complete rotary handle consists of: a circuit breaker operating sub-assembly, cat. no. 27046, a handle cat. no. 27047 or a handle cat. no. 27048 Installation: the circuit breaker operating sub-assembly cat. no. 27046 is fixed to the circuit breaker operating sub-assembly cat. no. 27046 is fixed to the circuit breaker operating sub-assembly cat. no. 27046 is fixed to the circuit breaker operating sub-assembly cat. no. 27046 is fixed to the removable front panel or on the enclosure door the fixed handle cat. no. 27048 is fixed to the front or side panel of the enclosure the fixed handle cat. no. 27048 Fixed handle 27046 Operating sub-assembly 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		

Accessories for MCB and RCD, except Acti9 iID RCCB (cont.)

Accessories	Padlocking device						
	Front		Side				
0672894_SE-20	27-99-90-1980	ф-десегием от-десегием от-дес	CT-1820CODY				
Function							
	Used to padlock a circuit breaker in the "opened" or "closed" position ■ Locking in the ON position does not prevent the circuit breaker from tripping in the event of an electrical fault ■ Isolation: in conformity with IEC/EN 60947-2. ■ Diameter of the padlock: 8 mm (0.31 in) max.	Used to padlock a circuit breaker in the "opened" position ■ Isolation: in conformity with UL 489/CSA C22.2 No 5 Listed and UL 1077 Recognized. ■ Diameter of the padlock: 8 mm (0.31 in) max.	Can be used to padlock a circuit breaker in opened position Attached directly to the circuit breaker, it cannot be lost Padlock diameter: 6 mm (0.24 in)				
Cat. numbers	26970	M9PAF	MGN26380	MGN26381			
			Left-hand mounting	Right-hand mounting			
Set of	2	1	1	1			
Suitable for the following devices:							
C60BP, C60BPR	•	•	•	•			
C60SP			•	•			
C60H-DC			•				
GFP		_	_	_			
C60N, H, L, C60CTRL	•	•	•	•			
N40N			•				
N40 Vigi		_	_	-			
Operating temperature	-35°C to +70°C / -31°F to 158°F	-35°C to +70°C / -31°F to 158°F	-35°C to +70°C / -31°F to 158°F	-35°C to +70°C / -31°F to 158°F			

Version : 2.12 - 19/12/2024 LVCATM9OEM_EN

Accessories for MCB and RCD, except Acti9 iID RCCB (cont.)

Installation (continued) Front mounting kit **Accessories** Pole filler Front mounting bracket Front mounting kit DIN rail support **Function** Consists of a transparent, DIN rail with support for Used to fill empty panels spaces Provides a convenient way to mount hinged, weatherproof cover front mounting kit cat. no. They clip into space circuit breakers, supplementary protectors Allows installation of up to They may be snapped apart in or accessories Allows installation of up to 9 mm (0.35 in) increments Allows the C60 devices to be clipped twenty modules (10 poles of onto it in a standard manner In 480 V AC UL 1077 applications, cat. C60) of circuit breakers or twenty modules (10 poles of C60) of circuit breakers or supplementary protectors and supplementary protectors no. 26981 terminal screw shield should be accessories A DIN rail with support and accessories used for increased isolation between the is also available terminal screws of the device and the Degree of protection a mounting bracket. These shields are s per IEC 529: IP55 included with the mounting bracket kits Includes a 10-Module ■ 1P ■ 2P ■ 3P 4P divisible blanking plate and mounting template Cat. numbers 14210 14211 MG26983 MG26984 MG26985 MG26989 1 strips of 8 by 18 mm (0.71 in) pole Set of Suitable for the following devices: C60BP, For multi-pole mounting kit For multi-pole mounting kit C60BPR cat. no.14210 cat. no.14210 C60SP C60H-DC GFP C60N, H, L, C60CTRL N40N

N40 Vigi Operating

temperature

-35°C to +70°C /

-31°F to 158°F

-35°C to +70°C /

-31°F to 158°F

Accessories for MCB and RCD, except Acti9 iID RCCB (cont.)

	Security				
Accessories	Screw shield	Terminal ship	eld	Inter-pole barrier	Spacer
	PB124114	PB104503-35		06-984401184	PB104483-38-
Function	'			1	
	Prevents all contact with the fixing screws The degree of protection becomes IP40 Sealable, max. diameter 1.2 mm (0.05 in) Dividable	Prevents all con the terminals Degree of proto IP40 Sealable, max 1.2 mm (0.05 in) 1P 3P: 1 x 26975 4P: 2 x A9A268	ection becomes diameter 2P +1xA9A26976	Enhances insulation between connections: cables, terminals, lugs, etc	■ Used to: □ complete the rows □ separate the devices ■ Width: 1 x 9 mm (0.35 in) module ■ Allows that 2 cables are routed from one row to another (above and below), up to 6 mm²
Cat. numbers	26981	26975	A9A26976	A9A27001	27062
Set of	2 (4P dividable)	2 (for upstream/d terminal)	lownstream	10	1
Suitable for the follow	wing devices:				
C60BP, C60BPR	-	_	_	-	•
C60SP				•	
C60H-DC					•
GFP	•	-	_	•	
C60N, H, L, C60CTRL	•	•	•	•	•
N40N	_	_	_	_	
N40 Vigi	-	-	_	_	
Operating temperature	-35°C to +70°C / -31°F to 158°F	-35°C to +70°C / -31°F to 158°F		-35°C to +70°C / -31°F to 158°F	-35°C to +70°C / -31°F to 158°F

Version : 2.12 - 19/12/2024 LVCATM9OEM_EN

Accessories for MCB and RCD, except Acti9 iID RCCB (cont.)

		Connectio	n			Spare part
Accessorie	s	Multi-cable te	rminal	50 mm² / #1 AWG AI terminal	Connection kit for ring terminals	Locking clips
	DB103334_SE-19		DB122861	98560P6Q	Sdynddir Sdynddir	
Function						
		For 3 copper cable Rigid up to 16 m Flexible up to 10	m²	For 16 to 50 mm ² aluminium cables	For terminal up to 63 A, front or rear access It incorporates a	Top and bottom locking clips
	DB118787			DB122286	"conductive" part and an "insulating" part which ensures the phase-to-phase clearance	
Cat. numbers		19091	19096	27060	M9A17400	27052
Set of		4	3	1	24	50
Suitable for the	followi	ng devices:				
C60BP, C60BPR		_	_	_	-	•
C60SP	≤ 25 A	_	-	_	•	•
C60SP	> 25 A	•	•	_	•	•
GFP			•	_	_	_
C60N, H, L, C60CTRL	≤ 25 A	_	-	_	•	•
C60N, H, L, C60CTRL	> 25 A	•	•	•	•	•
C60H-DC	≤ 25 A	-	-	-	•	•
C60H-DC	> 25 A	•	•	•	•	•
N40N		_	_	-	_	_
N40 Vigi		_	_	_	_	_
Tightening torqu	ie	2 N.m (18 lb.in)	•	10 N.m (89 lb.in)	2 N.m (18 lb.in)	_
Stripping length		11 mm (0.43 in)		13 mm (0.51 in)	_	_
Tools to be used		Flat 5 mm (0.2 in) o	r PZ2	Hc 1/5" or 5 mm (0.2 in)	Flat 5 mm (0.2 in) or PZ2	_
Operating temperature		-35°C to +70°C / -3		-35°C to +70°C / -31°F to 158°F	-35°C to +70°C / -31°F to 158°F	-

Mounting Rotary handle Accessories Plug-in base Padlocking device Front Side **Function** Front or side-mounted control The Laser Square Allows a breaker to be Used to padlock a breaker in Can be used to Degree of protection: IP55 tool brings the removed or replaced opened or closed position padlock a rotary handle accurency to align quickly, without handling ■ Padlock diameter: 3 to 6 mm breaker in (0.12 to 0.24 in) Installation: the breaker and the the connections opened □ the control mechanism is rotary handle Degree of protection: Sealable position mounted on the device IP20 (max. diameter: 1.2 mm / 0.05 in) Attached □ the rotary handle is fixed to the Consists of: Locking in ON position does directly to the front or side of the enclosure $\hfill\Box$ a base to be fastened on not prevent tripping of the breaker circuit breaker, Front-mounted (on door or a rail (or panel) in the event of faults it cannot be lost faceplate) Prevents the door from opening ■ Suitable for IEC/EN 60947-2 □ 2 "blades" to be fastened Padlock in the device's terminals compliant disconnection diameter: 6 mm when the device is in the ON Connection: tunnel (0.24 in)terminals for cable up to position (can be deactivated) Can be padlocked when the 35 mm² rigid, 25 mm² device is in the "opened" position flexible, Installation: (can be padlocked with the device in the "closed" position subject to □ in universal enclosure adaptation) on horizontal rail Can be locked by padlock of ■ Height: 178 mm (7.01 in) (dia. 5 to 8 mm / 0.2 to 0.31 in), not Not compatible with supplied with the device Vigi iC60 and auxiliaries Pushbutton: iID test available in Can be locked by padlock the front face of the rotary handle of (dia. 6 mm / 0.24 in), not supplied with the device Catalog A9A27005 A9A27006 A9A27008 GVAPL01 A9A27003 (1 per pole) A9A26970 A9A26380 numbers Operating sub-assembly Left-hand mounting Black Red No handle handle handle Set of 10 Suitability ■ <63A


Version: 2.12 - 19/12/2024 LVCATM90EM_EN


ARA+iID


	Security			
Accessories	Screw shield	Terminal shield	Inter-pole barrier	Spacer
Function	PB ADDRESS A PROGRAM AND ADDRESS AND ADDRE	06-169h018d	\$6.58PHO18B4	
	Prevents any contact with the connecting screws ■ Upgrades degree of protection to IP20D ■ Sealable, max. diameter 1.2 mm (0.05 in)	Prevents any contact with the terminals Upgrades degree of protection to IP20D Sealable, max. diameter 1.2 mm (0.05 in) Set of two, for power supply and output terminals For 3 poles: A9A26975 + A9A26976 For 4 poles: 2 X A9A26976	Enhances insulation between connections: cables, terminals, lugs, etc	■ Used to: □ complete rows □ separate devices. ■ Width: 1 x 9 mm (0.35 in) module ■ Allows cable routing from one row to another, (above and below), up to 6 mm²
Catalog numbers	A9A26981	A9A26976	A9A27001	A9A27062
Set of	20 x 4 poles (splittable)	2 x 2 poles	10	5
Suitability				
iID	-	•	•	•
ARA+iID	•	•	•	•


	Connection		
Accessories	Multi-cable terminal		50 mm² Al terminal
08.418.00		DB114761	
Function			
			For aluminium cables from 16 to 50 mm ²
DB118787		DB122835	AI
Catalog numbers	19091	19096	27060
Set of	4	3	1
Suitability			
iID	-	•	•
Tightening torque	2 N.m		10 N.m
Lenght stripping	11 mm (0.43 in)		13 mm (0.51 in)
Tools to use	Dia. 5 mm (0.2 in) or PZ2		Hc 1/5" or 5 mm (0.2 in)


Dimensions (mm / inches)

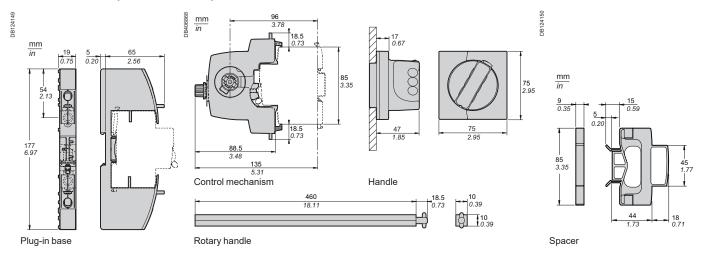









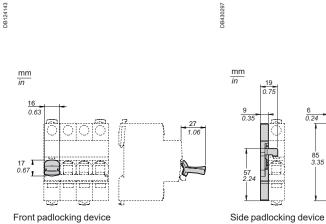





Rotary handle installation

Dimensions (mm / inches)

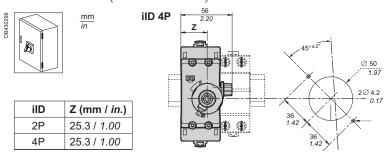


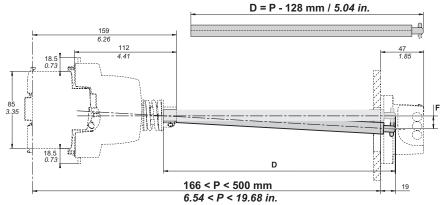



P (mm / in.)	F (mm / in.)
300 / 11.81	5 / 0.20
500 / 19.68	11 / 0.43



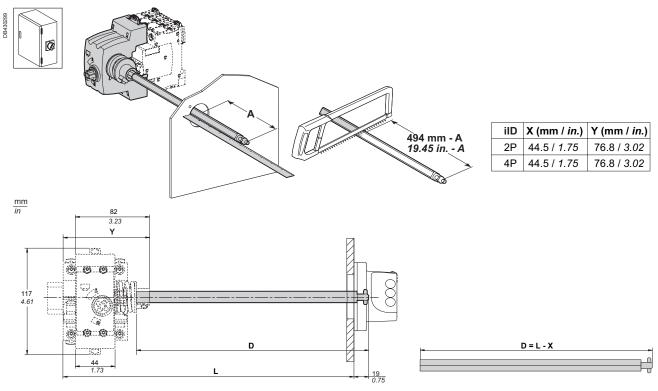

Rotary handle: side mounted control

Accessories for Acti9 RCCB-ID 125 A

	Installation	Security	
Accessories	Padlocking device	Screw shield	Spacer
	Front		
277145-16	ВВ.100572-07 РВВ100573-18	PBIO4483-35	
Function			
	Used to padlock a circuit breaker in the "opened" or "closed" position ■ Locking in the ON position does not prevent the circuit breaker from tripping in the event of an electrical fault ■ Diameter of the padlock: 8 mm (0.31 in) max.	Prevents all contact with the fixing screws ■ The degree of protection becomes IP40 ■ Sealable, max. diameter 1.2 mm (0.05 in)	Used to: □ complete the rows □ separate the devices ■ Width: 1 x 9 mm (0.35 in) module ■ Allows that 2 cables are routed from one row to another (above and below), up to 6 mm²
Cat. numbers	27145	16938 (2P)	27062
		16939 (4P)	
Set of	4	10	1
Suitable for the fol	lowing devices:		
RCCB-ID 125 A		•	
Operating temperature	-35°C to +70°C / -31°F to 158°F	-35°C to +70°C / -31°F to 158°F	-35°C to +70°C / -31°F to 158°F



Comb busbars for C60BP




UL489, UL508, IEC/EN 61439-1

These comb busbars are aimed to be used only with C60BP circuit breakers.

They perform distribution and subdistribution of the electric power supply and allow rapid assembly and disassembly of equipment.

Comb busbars

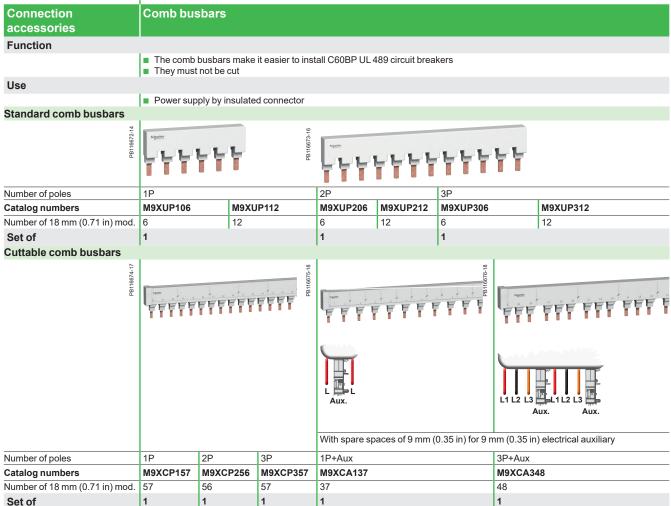

Technical specifications	
Operating current at 40°C (104 °F) (le)	Standard comb busbars: 115 A Cuttable comb busbars: 80 A
Resistance to short-circuit currents	Compatible with the breaking capacity of Schneider Electric modular circuit breakers
Voltage rating (Ue)	480Y/277 V
Insulation voltage (Ui)	1000 V A C
Pollution degree	3
Fire resistance	Self-extinguishability 960°C (1760 °F) 30 secondes
Colour	RAL 9001
Standards	UL489 and UL508

81


Comb busbars for C60BP (cont.)



These comb busbars are aimed to be used only with C60BP circuit breakers.

They perform distribution and subdistribution of the electric power supply and allow rapid assembly and disassembly of equipment.

Accessories Connection accessories Function Comb busbar power supply Vertical incoming feeder Use Accessories Tooth covers End-piece End-piece Insulation of teeth remaining free Insulation of end of comb busbar



Rigid and flexible copper cable:

6 to 35 mm² (AWG #10 to #2)

Number of poles	All	All	-
Catalog numbers	M9XUPC04	M9XUTC15	-
Number of 18 mm (0.71 in) mod.	-	-	-
Set of	4 81-08	5 x 3	-
Cuttable comb busbars 🐇	981188	PB1166	
PB1189	<u>.</u>		

Number of poles	All	All	All
Catalog numbers	M9XCPC04	M9XCTC15	M9XCEC10
Number of 18 mm (0.71 in) mod.	-	-	-
Set of	4	5 x 3	10

Technical specifications			
Operating current at 40°C (104 °F) (le)	63 A	63 A	63 A
Resistance to short-circuit currents	Compatible with the breaking capacity of Schneider Electric modular circuit breakers	Compatible with the breaking capacity of Schneider Electric modular circuit breakers	Compatible with the breaking capacity of Schneider Electric modular circuit breakers
Voltage rating (Ue)	480Y/277 V	480Y/277 V	480Y/277 V
Insulation voltage (Ui)	1000 V AC	1000 V AC	1000 V AC
Pollution degree	3	3	3
Fire resistance	Self-extinguishability 960°C (1760 °F) 30 secondes	Self-extinguishability 960°C (1760 °F) 30 secondes	Self-extinguishability 960°C (1760 °F) 30 secondes
Colour	RAL 7035	RAL 1021	RAL 7035
Standards	UL486E	-	-

Comb busbars for C60SP




UL1077, IEC/EN 61439-1

The comb busbars are used only for C60SP circuit breakers UL 1077 supplementary protection in conformity with standards:


UL 1077, CSA C22.2 No. 235, IEC 60947-2, GB/T 14048.2.

They perform distribution and subdistribution of the electric power supply and allow rapid assembly and disassembly of equipment.

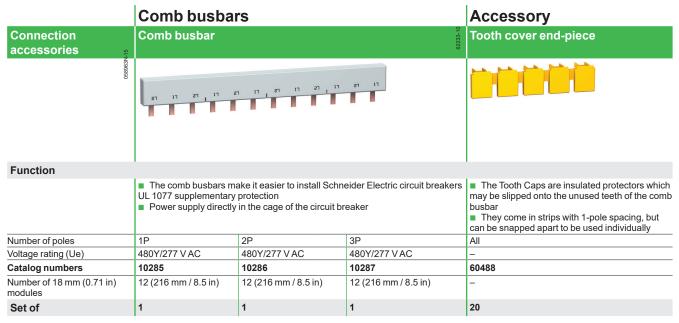

Technical specification	s	
Insulation voltage (Ui)	690 V	_
Impulse withstand voltage (Uimp)	12 kV under 240 V 5 kV under 480Y/277 V or 277 V	-
Operating current at 40°C (104 °F) (le)	63 A with 1 central power supply point	-
	Power supply via cable directly in the cage of the device: cross section maxi: 3 AWG (25 mm²) cross section mini: 10 AWG (5.27 mm²)	
Resistance to short-circuit currents	Compatible with the breaking capacity of C60SP Schneider Electric circuit break	kers UL 1077 supplementary protection
Pollution degree	3	
Fire resistance	Self-extinguishability 960°C (1760 °F) 30 secondes	
Colour	RAL 7035	RAL 1021
Standards	UL 1077	-

Dimensions (mm / inches)

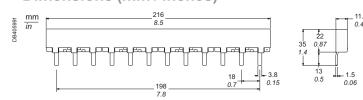

Comb busbars for C60N, C60H, C60L (18 mm / 0.71 in pitch)







IEC/EN 61439-1







C60	18 mm (0.71 in) poles, cuttable				
Number of poles	1P	2P	3P	4P	3 (N+P)
	L1	L1 L2	L1 L2 L3	N L1 L2 L3	N L1 NL2 NL3
Туре	L1	L1L2	L1L2L3	NL1L2L3	NL1NL2NL3
Set of	1	1	1	1	1
Catalog numbers					
6 modules of 18 mm (0.71 in)	A9XPH106	-	A9XPH306	-	-
12 modules of 18 mm (0.71 in)	A9XPH112	A9XPH212	A9XPH312	A9XPH412	A9XPH512
18 modules of 18 mm (0.71 in)	-	-	-	-	A9XPH518
24 modules of 18 mm (0.71 in)	A9XPH124	A9XPH224	A9XPH324	A9XPH424	A9XPH524
57 modules of 18 mm (0.71 in)	A9XPH157	A9XPH257	A9XPH357	A9XPH457	A9XPH557

Technical da	ata		
Operating current at 40°C (104 °F)	(le)	100 A	
Short-circuit current	(Isc)	Compatible with the breaking capacity of Schneider Electric circuit breakers	
Rated insulation voltage	(Ui)	500 V AC	
Operating voltage	(Ue)	415 VAC	
Pollution degree		3	
Fire resistance IEC 695-2-1 Self-e		Self-extinguishing at 960°C (1760°F) 30 secondes	
Color RAL 7016 (anthracite grey)			

Accessories						
Number of poles	1P	2P	3P	4P	-	-
	1	M.				
	End-pieces				Tooth covers	Connectors
						Monoconnect
	Lateral end-pieces providing IP20 protection			ection	Insulate teeth that have been left free	Comb busbar power supply. Horizontal incomer on each side. For 35 mm² cable. Tightening torque 4 N.m (35.4 lb.in)
Set of	10	10	10	10	20	4
Catalog numbers	A9XPE110	A9XPE210	A9XPE310	A9XPE410	A9XPT920	A9XPCM04

1

Comb busbars for C60N, C60H, C60L (18 mm / 0.71 in pitch) (cont.)



Cuttable comb bu	usbars, 18 mm (0.7	<mark>'1 in) modules, wi</mark> t	th 9 mm (0.35 in) a	uxiliary	
Aux+1P	Aux+2P	Aux+3P	Aux+4P	3 (Aux+1P)	3 (Aux+N+1P)
L1 Aux.	Aux.	L1L2 L3	N L1L2L3	Aux. Aux.	Aux. Aux. Aux.
AuxL1	AuxL1L2	AuxL1L2L3	AuxNL1L2L3	AuxL1AuxL2AuxL3	AuxL1AuxL2AuxL3
1	1	1	1	1	1
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
A9XAH157	A9XAH257	A9XAH357	A9XAH457	A9XAH657	A9XAH557

Comb busbars for N40N, N40 Vigi (9 mm / 0.35 in pitch)



9 mm (0.35 in)











	Street Street Street Street Street Street Street
Schypister AMEPRITY COMMISSION OF LEG	11111 (6 2 0 L3 0 L1 0 L2 0 L3
0 4 0 2 0 3 0 4 1	

N40N, N40 Vigi		9 mm (0.35 in) poles, cuttable							
Number of po	oles	1P + N			3P + N				
		N L			N L1 N L2 N L3				
Number of 18 r	mm (0.71 in) modules	12	24	48	12	24	48		
Supplied accessories	Tooth covers (for 3 modules of 18 mm / 0.71 in)	1	2	-	1	2	-		
	End-pieces	4	4	-	4	4	-		
Catalog num	bers	A9XPC612	A9XPC624	A9XPC648 (*)	A9XPC712	A9XPC724	A9XPC748 (*)		

(*) **A** CAUTION INCOMPATIBILITY BETWEEN 1P+N COMB BUSBARS AND 3P+N DEVICES

- Never connect a 1P+N comb busbar to a 3P+N device, as this will result in a multi-phase bolted

- Always check that the head of group circuit breaker is in good working condition before connecting a comb busbar.

Failure to follow these instructions can result in injury or equipment damage.

Technical data		
Operating current at 40°C (104 °F)	(le)	80 A
Short-circuit current	(Isc)	Compatible with the breaking capacity of Schneider Electric circuit breakers
Rated insulation voltage	(Ui)	400 V AC (Ph/N) - 440 V AC (Ph/Ph)
Operating voltage	(Ue)	230 V AC (Ph/N) - 400 V AC (Ph/Ph)
Degree of protection		IP20
Pollution degree		3
Fire resistance IEC 695-2-1		Self-extinguishing at 960°C (1760 °F) 30 secondes
Color		RAL 9003

Accessories				
Number of poles	1P+N	3 (N+P)		
	End-pieces		Tooth covers (3 x 18 mm modules)	Connectors
Set of	40	40	12	4
Catalog numbers	A9X21094	A9X21095	A9X21096	A9XPCM04

Comb busbars for N40N, N40 Vigi (9 mm / 0.35 in pitch) (cont.)









Comb busbar for 1P+N circuit breaker with 9 mm (0.35 in) auxiliary OF, SD

N40N, N40 Vigi	9 mm (0.35			
Number of poles	Aux., N, L	Aux. NL1, Aux. NL2, Aux. NL3	Aux., N, L1	Aux. NL1, Aux. NL2, Aux. NL3
	N L Aux.	N L1 N L2 N L3 Aux. Aux. Aux.	18 mm (0.71 in) N L Aux. Aux.	18 mm (0.71 in)
	N40N comb bust	bar	N40 Vigi comb busbar	
Number of 18 mm (0.71 in) modules	48	48	48	48
Catalog numbers	A9XPA648	A9XPA748	A9XPV648	A9XPV748

Technical data		
Operating current at 40°C (104 °F)	(le)	80 A
Short-circuit current	(Isc)	Compatible with the breaking capacity of Schneider Electric circuit breakers
Rated insulation voltage	(Ui)	400 V AC (Ph/N) - 440 V AC (Ph/Ph)
Operating voltage	(Ue)	230 VAC (Ph/N) - 400 VAC (Ph/Ph)
Degree of protection		IP20
Pollution degree		3
Fire resistance IEC 695-2-1		Self-extinguishing at 960°C (1760 °F) 30 secondes
Color		RAL 9003

Accessories				
Number of poles	1P+N	3 (N+P)		
	End-pieces		Tooth covers (3 x 18 mm modules)	Connectors
Set of	40	40	12	4
Catalog numbers	A9X21094	A9X21095	A9X21096	A9XPCM04

Linergy DS screw distribution blocks





IEC/EN 60947-7-1, IEC/EN 61439-1 & 2

As per the above standards:

Description

- Single-pole or four-pole distribution block that can be installed on a standard DIN rail or on a mounting plate.
- Compatible with Prisma G and P, Pragma, Mini Pragma and Resbo series switchboards.
- Incomers and feeders are connected to screw terminals that accept rigid or flexible cables with ferrule.
- Optional: additional neutral terminal strip for four-pole distribution block.

Advantages

- Simplified power supply for main incomers.
- Easy phase balancing.
- Easy, effortless cabling due to excellent accessibility.
- Visible cabling.
- Insulation between phases.
- The single-pole distribution blocks are adjacent and bridgeable via the second incoming hole for parallel connection.

Number of poles	1P			4P
	PB111250-20_1 ops	PB11251-20_1 aps	PB111282-20_1 days	PB111243-20_1 aps
Rated operational current	125 A	160 A	250 A	100 A
Total connections capacity	10	13	14	4 x 7
Terminal capacity				
Diameter	2 x Ø 9.5 mm (0.37 in)	2 x Ø 12 mm (0.47 in)	1 x Ø 15.3 mm	2 x Ø 7.5 mm (0.29 in)
	2 x Ø 7.5 mm (0.29 in)	3 x Ø 7.5 mm (0.29 in)	1 x Ø 10 mm (0.39 in)	5 x Ø 5.5 mm (0.22 in)
	6 x Ø 5.8 mm (0.23 in)	8 x Ø 5.8 mm (0.23 in)	4 x Ø 6 mm (0.24 in)	-
	-	-	8 x Ø 7.5 mm (0.29 in)	-
Rated peak lpk/60 ms	25 kÂ	36 kÂ	60 kÂ	14 kÂ
withstand current lpk/6 ms (lpk)	-	-	-	24 kÂ
Rated short-time withstand current (Icw) (IEC/EN 60947-7-1)	4.2 kA rms/1 s	8.4 kA rms/1 s	14.4 kA rms/1 s	3 kA rms/1 s
Width (nb of 9 mm / 0.35 in pitches)	3	4	5	8
Dimension (H x W x D)	85 x 27 x 50.5 mm 3.35 x 1.06 x 1.99 in	85 x 36 x 50.5 mm 3.35 x 1.42 x 1.99 in	85 x 45 x 50.5 mm 3.35 x 1.77 x 1.99 in	100 x 71 x 50.5 mm 3.94 x 2.79 x 1.99 in
Weight	125 g (4.41 oz)	163 g (5.75 oz)	239 g (8.43 oz)	210 g (7.41 oz)
Neutral terminal strip (optional)	-	-	-	LGYN1007
References	LGY112510	LGY116013	LGY125014	LGY410028

Linergy DS screw distribution blocks (cont.)

DB406005_14ps

On LGY412560 and LGY416048 references. Input cabling facilitated by side terminals.

Technical data


Common characteristics						
To IEC/EN 60947-7-1 and IEC/EN 61439-1 & 2						
Rated insulation voltage (Ui)	500 V AC					
Rated operational voltage (Ue)	230 V AC (Ph/N) 440 V AC (Ph/Ph)					
Rated impulse withstand voltage (Uimp)	8 kV					
Rated conditional short-circuit current of an assembly	Up to the breaking capacity of Schneider Electric feeder circuit breakers, even in cascading configuration					
Network frequency	50/60 Hz					
Pollution degree	3					
Overvoltage category	III					
Additional technical characterist	ics					
Reference temperature	40 °C (104 °F)					
Operating temperature	-25 °C to 55 °C (-13 °F to 131 °F)					
Dielectric withstand (IEC/EN 60947-1)	2500 V AC					


				Neutral terminal strip		
PB111724-20 1 ees	00000000000	PB111245-20-1-6ps	PB111246-20 J. Leps	PBI11247-20_1 ops	PB111248-20_1 opps	PB111249-20 1-ops
	125 A		160 A	100 A	125 A	
4	4 x 12	4 x 15	4 x 12	7	12	15
	1 x Ø 9 mm (0.35 in)	1 x Ø 9.5 mm (0.37 in)	1 x Ø 12 mm (0.47 in)	2 x Ø 7.5 mm (0.29 in)	1 x Ø 9 mm (0.35 in)	1 x Ø 9.5 mm (0.37 in)
-	7 x Ø 7.5 mm (0.29 in)	3 x Ø 8.5 mm (0.33 in)	3 x Ø 9 mm (0.35 in)	5 x Ø 5.5 mm (0.22 in)	7 x Ø 7.5 mm (0.29 in)	3 x Ø 8.5 mm (0.33 in)
4	4 x Ø 6.5 mm (0.26 in)	11 x Ø 6.5 mm (0.26 in)	8 x Ø 7.5 mm (0.29 in)	-	4 x Ø 6.5 mm (0.26 in)	11 x Ø 6.5 mm (0.26 in)
-	-	-	-	-	-	-
	18 kÂ	18 kÂ	22 kÂ	-	-	-
1	26 kÂ	28 kÂ	36 kÂ	-	-	-
4	4.2 kA rms/1 s	4.2 kA rms/1 s	8.4 kA rms/1 s	-	-	-
	14	20	18	7	14	17
	100 x 126 x 50.5 mm 3.94 x 4.96 x 1.99 in	100 x 162 x 50.5 mm 3.94 x 6.38 x 1.99 in	100 x 174 x 50.5 mm 3.94 x 6.85 x 1.99 in	20 x 70 x 35 mm 0.79 x 2.76 x 1.38 in	20 x 125 x 35 mm 0.79 x 4.92 x 1.38 in	20 x 155 x 35 mm 0.79 x 6.1 x 1.38 in
;	390 g (13.76 oz)	559 g (19.72 oz)	567 g (20 oz)	63 g (2.22 oz)	111 g (3.91 oz)	149 g (5.26 oz)
	LGYN12512	LGYN12515	LGYN12512	-	-	-
1	LGY412548	LGY412560	LGY416048	LGYN1007	LGYN12512	LGYN12515


Linergy DS screw distribution blocks (cont.)

Terminal techni	cal data							
Туре	PZ2 screw							
Diameter	Ø 5.5 mm (0.22 in)	Ø 5.8 mm (0.23 in)	Ø 6 mm (0.24 in)	Ø 6.5 mm (0.26 in)	Ø 7.5 mm (0.3 in)	Ø 8.5 mm (0.33 in)	Ø 9 mm (0.35 in)	Ø 9.5 mm (0.37 in)
Section rigid cable	1.5 to 16 mm ² (AWG #16 to AWG #6)	1.5 to 16 mm ² (AWG #16 to AWG #6)	1.5 to 16 mm ² (AWG #16 to AWG #6)	1.5 to 16 mm ² (AWG #16 to AWG #6)	2.5 to 25 mm ² (AWG #14 to AWG #4)	6 to 35 mm ² (AWG #10 to AWG #2)	10 to 35 mm ² (AWG #8 to AWG #2)	10 to 35 mm ² (AWG #8 to AWG #2)
Section flexible cable or with ferrule	1.5 to 10 mm ² (AWG #16 to AWG #8)	1.5 to 10 mm ² (AWG #16 to AWG #8)	1.5 to 10 mm ² (AWG #16 to AWG #8)	1.5 to 10 mm ² (AWG #16 to AWG #8)	1.5 to 16 mm ² (AWG #16 to AWG #6)	4 to 25 mm ² (AWG #12 to AWG #4)	4 to 25 mm ² (AWG #12 to AWG #4)	6 to 35 mm ² (AWG #10 to AWG #2)
Tightening torque	2 N.m (18 lb.in)	2 N.m (18 lb.in)	2.5 N.m (22 lb.in)	2.5 N.m (22 lb.in)				
Туре	Hc screw							
Diameter	Ø 9.5 mm (0.37 in)	Ø 10 mm (0.39 in)	Ø 12 mm (0.47 in)		Ø 15.3 mm (0.6 in)			
Section rigid cable	10 to 35 mm ² (AWG #8 to AWG #2)	1.5 to 50 mm ² (AWG #16 to AWG #1)	25 to 70 mm ² (AWG #4 to AWG #2/0)	Ø ≤ 15 mm (0.59 in)	35 to 120 mm ² (AWG #2 to AWG #4/0)			
Section flexible cable or with ferrule	6 to 35 mm ² (AWG #10 to AWG #2)	1.5 to 35 mm ² (AWG #16 to AWG #2)	16 to 50 mm ² (AWG #6 to AW	G #1)	25 to 95 mm ² (AWG #4 to AWG #3/0)			
Tightening torque	8 N.m (71 lb.in)	4 N.m (35 lb.in)	1P: 9 N.m (80 lb.in)	4P: 5 N.m (44 lb.in)	14 N.m (124 lb.in)			

Dimensions (mm / inches)

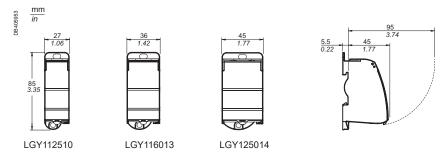

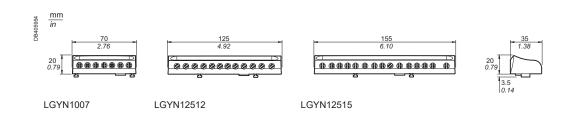

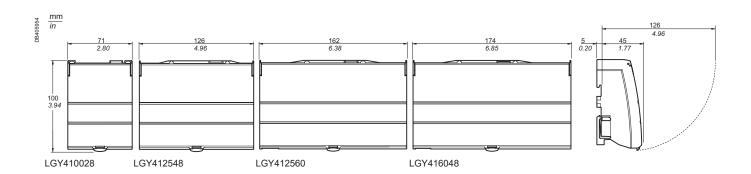



Technical information

Breaker standards

The setup of circuit protective devices depends on the electrical installation standard. Multi9 devices (designed for machinery and equipment manufacturers, integrators, panelbuilders, etc.) are tested in accordance with the UL (Underwriter Laboratories) product standard in order to meet the requirements of the NEC (National Electric Code) installation standard, in force in the United States. To allow the most extensive possible use worldwide, Multi9 "UL" products are also tested to ensure compliance with IEC and CSA standards.

The CE Marking is an administrative formality for free circulation and sale on the territory of the European Union.

Made compulsory by a European directive, the CE Marking of products complies with the administrative and legal requirements. Designed for the European supervisory authorities (customs authorities), the "CE Marking" declarations and dossiers are produced under the sole responsibility of the manufacturer and undergo no conformity check by a third-party organization. Only the quality marks, issued and inspected by an independent third-party organization, provide a guarantee of operation, compatibility and safety in accordance with national and international standards.



UL 489

Branch circuit protection

The UL 489 standard applies primarily to the protection of circuits installed, in accordance with the NEC (National Electric Code):

- upstream of a device or a machine (branch circuit protection)
- inside the device or a machine, for certain loads (ventilation, air conditioning, heating, etc.)
- to power loads external to the device (motors, power sockets, etc.).



Supplementary protection - Internal protection of electrical equipment

The UL 1077 standard applies to circuit breakers for electrical equipment, in accordance with the NEC. These circuit breakers are considered as components forming part of the equipment but can in no case replace a UL 489 protective device. Their use is limited to the protection of specific loads exclusively inside the machine or equipment. Where the machine or equipment is powered upstream by a control panel, the UL 1077 protection must be combined with a UL 489 protective device in that panel.



CSA C22.2 No. 5-02

Branch circuit protection

The requirements of this standard cover circuit breakers that are specifically intended to provide service entrance, feeder and branch circuit protection in accordance with the National Installation Codes.

This standard is close to UL489.



CSA C22.2 No. 235-04

Supplementary protection - Internal protection of electrical equipment

This Standard applies to supplementary protectors that are intended for use as components within appliances or other electrical equipment where branch-circuit protection is already provided (or is not required), in accordance with the Rules of the Canadian Electrical Code.

This standard is close to UL1077.

IEC 60947-2

The IEC 60947-2 standard is an international product standard concerning circuit breakers; it is used for industrial circuit protection applications. It meets the requirements of the IEC 60364 installation standard.



GB/T 14048.2

The GB/T 14048.2 standard is close to the IEC 60947-2 standard for installations on Chinese territory.



5

Residual Current Device standards

The setup of circuit protective devices including the RCD depends on the electrical installation standard. Multi9 GFP (designed for machinery and equipment manufacturers, integrators, panelbuilders, etc.) are tested in accordance with the UL (Underwriter Laboratories) product standard in order to meet the requirements of the NEC (National Electric Code) installation standard, in force in the United States.

To allow the most extensive possible use worldwide, Multi9 GFP "UL" products are also tested to ensure compliance with IEC standards.

The CE Marking is an administrative formality for free circulation and sale on the territory of the European Union.

Made compulsory by a European directive, the CE Marking of products complies with the administrative and legal requirements. Designed for the European supervisory authorities (customs authorities), the "CE Marking" declarations and folders are produced under the sole responsibility of the manufacturer and undergo no conformity check by a third-party organization. Only the quality marks, issued and inspected by an independent third-party organization, provide a guarantee of operation, compatibility and safety in accordance with national and international standards.

Multi9 RCDs compliant to IEC are also compliant to the European EN standards for use in European Countries.



UL 1053

Ground Fault Protector

The UL 1053 standard applies to the ground fault protection devices for circuits installed in accordance with the NEC (National Electric Code):

- protection against fire risks on the supply end devices
- protection of people against electric shock by direct and indirect contacts (failure of basic protection, involuntary contact with live parts, machines, or equipment with internal insulation faults for which the conductive parts become live)
- protection of installations against insulation faults (ground faults).

IEC 61008-1

Residual Current Circuit Breaker without overcurrent protection

The IEC 61008-1 standard is an international product standard of general rules for residual current circuit breakers with no overcurrent protection (RCCB); it is used for protection against electric shock and circuit protection applications. It meets the requirements of the IEC 60364 low voltage electrical installation standard.

EN 61008-1

Residual Current Circuit Breaker without overcurrent protection

The EN 61008-1 standard is a European product standard of general rules for residual current circuit breakers with no overcurrent protection (RCCB); it is used for protection against electric shock and circuit protection applications. It meets the requirements of the European application of IEC 60364 low voltage electrical installation standard.

IEC 61008-2-1

Residual Current Circuit Breaker without overcurrent protection, Voltage Independent (VI)

The IEC 61008-2-1 standard is an international product standard for residual current circuit breakers with no overcurrent protection (RCCB) functionally independent of the line voltage; it is used for protection against electric shock and circuit protection applications. It meets the requirements of the IEC 60364 low voltage electrical installation standard

EN 61008-2-1

Residual Current Circuit Breaker without overcurrent protection, Voltage Independent (VI)

The EN 61008-2-1 standard is the European application of the product standard for residual current circuit breakers with no overcurrent protection (RCCB) functionally independent of the line voltage; it is used for protection against electric shock and circuit protection applications. It meets the requirements of the European application of IEC 60364 low voltage electrical installation standard.

Residual Current Device standards

IEC 61009-1

Residual Current Circuit Breaker with Overcurrent Protection

The IEC 61009-1 standard is an international product standard requesting the general rules for residual current circuit breakers with overcurrent protection (RCBO); it is used for protection against electric shock and circuit protection applications. It meets the requirements of the IEC 60364 low voltage electrical installation standard.

EN 61009-1

Residual Current Circuit Breaker with Overcurrent Protection

The EN 61009-1 standard is the European application of the product standard requesting the general rules for residual current circuit breakers with overcurrent protection (RCBO); it is used for protection against electric shock and circuit protection applications. It meets the requirements of the European application of IEC 60364 low voltage electrical installation standard.

IEC 62423

Type B RCD

The IEC 62423 standard is an international product standard for residual current devices of type B and type F; it is used for protection against electric shock and circuit protection applications. It meets the requirements of the IEC 60364 low voltage electrical installation standard.

EN 62423

Type B RCD

The IEC 62423 standard is the European application of the product standard for residual current devices of type B and type F; it is used for protection against electric shock and circuit protection applications. It meets the requirements of the European application of IEC 60364 low voltage electrical installation standard.



0664-40

The VDE 0664-40 standard is the German product standard concerning residual current devices of type B and type F; it is used for protection against electric shock and circuit protection applications. It meets the requirements of the German application of IEC 60364 low voltage electrical installation standard.


IEC 61543

Electromagnetic compatibility of RCDs

The IEC 61543 standard is an International standard defining the requirements for electromagnetic compatibility of RCDs.

The standards and their applications

Example of use of UL 489 circuit breakers and UL 1077 electrical equipment internal protective devices

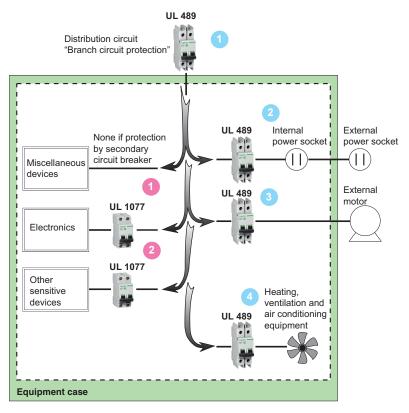

UL 1077

Applications allowing the use of electrical equipment internal protective devices



Supplements an existing protective device or provides additional protection inside equipment

UL 1077 2



Used for the protection of internal circuits such as:

- Computers and microprocessors
- Telecommunications equipment
- Electronic controllers
- Power supply sources
- Transformers
- Small motors.

UL 489

Applications requiring branch circuit protection



Equipment incoming end protection.



Power socket circuit protection (internal or external).

UL 489




Protection of an external circuit (e.g. motor).



Protection of heating, ventilation and air conditionning equipment (HACR/HVAC).

Circuit breakers tripping curves

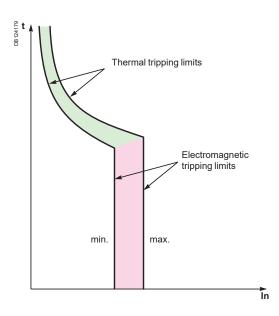

The following curves show the total fault current breaking time, depending on its amperage. For example: based on the curve on "Circuit breakers tripping curves", page 96, a C60 circuit breaker of curve C, 20 A rating, will interrupt a current of 100 A (5 times the rated current In) in:

- 1 second at least
- 7 seconds at most.

The circuit breakers' tripping curves consist of two parts:

- tripping of overload protection (thermal tripping device): the higher the current, the shorter the tripping time
- tripping of short-circuit protection (magnetic tripping device): if the current exceeds the threshold of this protection device, the breaking time is less than 10 milliseconds. For short-circuit currents exceeding 20 times the rated current, the time-current curves do not give a sufficiently precise representation. The breaking of high short-circuit currents is characterized by the current limiting curves, in peak current and in energy. The total breaking time can be estimated at 5 times the value of the ratio (I²t)/(Î)².


Verification of the discrimination between two circuit breakers

C60N, C60H, C60L, C60CTRL


By superimposing the curve of a circuit breaker on that of the circuit breaker installed upstream, one can check whether this combination will be discriminating in cases of overload (discrimination for all current values, up to the magnetic threshold of the upstream circuit breaker). This verification is useful when one of the two circuit breakers has adjustable thresholds; for fixed-threshold devices, this information is provided directly by the discrimination tables.

To check discrimination on short circuit, the energy characteristics of the two devices must be compared.

Alternative current 50/60 Hz

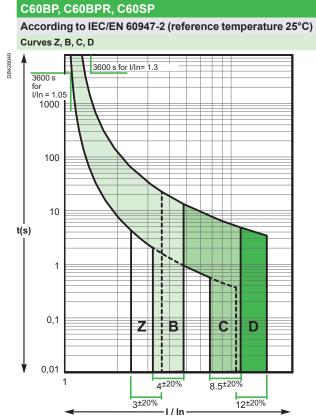



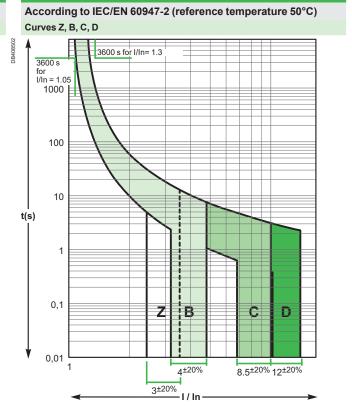


Circuit breakers tripping curves (cont.)


Direct current

C60BP, C60BPR, C60SP

According to IEC/EN 60947-2 (reference temperature 25°C) Curves Z. B. C. D

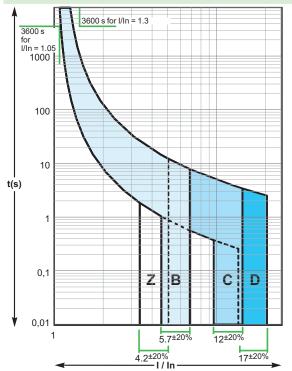


C60N, C60H, C60L, C60CTRL According to IEC/EN 60947-2 (reference temperature 50°C) Curves Z, B, C, D

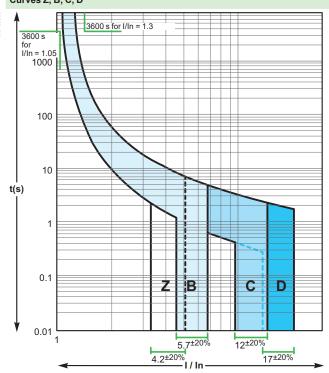

Note: IEC/EN 60947-2 tripping curves, respecting the tripping time specified by the standards UL 489, CSA C22.2 No 5, UL 1077 and CSA C22.2 No 235

According to IEC/EN 60947-2 (reference temperature 25°C) Curves B, C, K

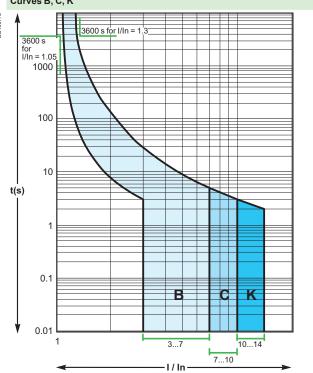

Note: IEC/EN 60947-2 tripping curves, respecting the tripping time specified by the standards UL 1077 and CSA C22.2 No 235


Circuit breakers tripping curves (cont.)


The circuit-breaker characteristics chosen depend on the type of load downstream of the installation.

The rating depends on the size of the cables to be protected and the curves depend on the load inrush current.


Product selection according to the load inrush current

When certain "capacitive" loads are switched on, very high inrush currents appear during the first milliseconds of operation. The following graphs show the average non-tripping curves of our products for this time range (50 μ s to 10 ms).

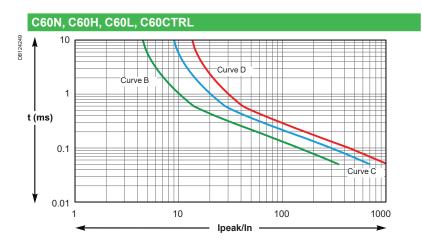

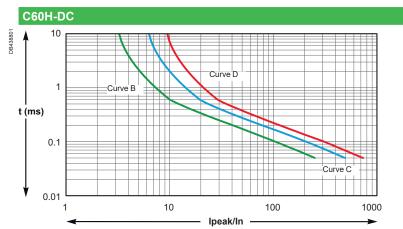

This information allows us to select the most appropriate product, according to the load specifications: curve and rating.

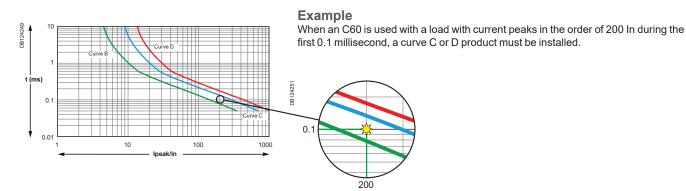

Miniature Circuit Breakers for DC applications up to 380 V DC

This application sheet is intended to provide guidance for selecting the best protection and control components for a given DC system. The scope is DC system supplied by rectifier (AC/DC or DC/DC converter) and/or battery, isolated or connected to earth.

The application voltages are 24 V DC, 48 V DC, 110 V DC and 220 V DC.

A. Circuit breaker selection for 24/48 V DC according to the method of earthing

Refer to Tables A of Application Guide CA908061E.

C60BP / C60BPR / C60SP and C60N/H/L circuit breakers follow the wiring rules of iC60N/H/L circuit breakers.


Multi9 C60H-DC circuit breakers follow the wiring rules of Acti9 C60H-DC circuit breakers

The breaking capacities of these products are available in catalog pages.

B. Circuit breaker selection for 110 V DC according to the method of earthing

Refer to Tables B of Application Guide CA908061E.

Multi9 C60H-DC circuit breakers follow the rules of Acti9 C60H-DC circuit breakers.

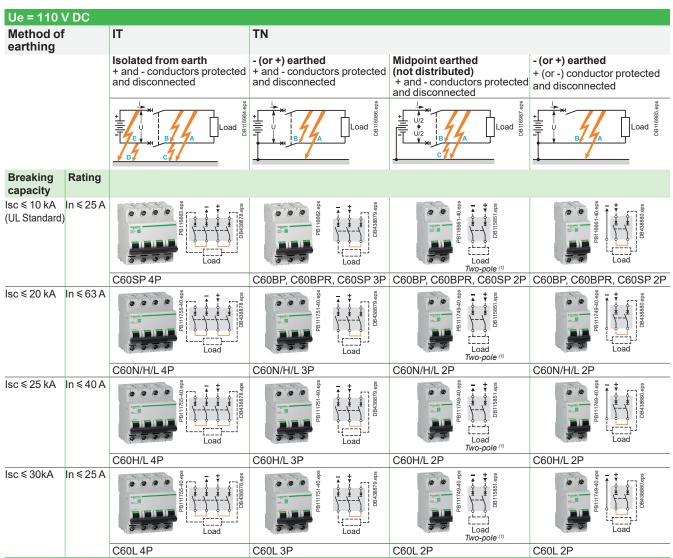

Note: This table is applicable for 125 V DC floating battery voltage.

C. Circuit breaker selection 220 - 380 V DC according to the method of earthing

Refer to Tables C of Application Guide CA908061E.

Multi9 C60H-DC circuit breakers follow the rules of Acti9 C60H-DC circuit breakers.

Influence of ambient temperature

Influence of temperature on the operation

Devices		Characteristics influenced by temperature	Tempe	erature
			Mini	Maxi
C60BP, C60BPR, C	C60SP, C60N, C60H, rcuit breakers	Tripping on overload	-30°C	+70°C
N40N circuit break	ers	Tripping on overload	-25°C	+70°C
C60H-DC circuit br	eakers	Tripping on overload	-25°C	+70°C
Circuit breakers	Vigi AC Type	Tripping on overload	-5°C	+60°C
with	Vigi A-SI Type		-25°C	+60°C
N40 Vigi		Tripping on overload	-5°C	+60°C
GFP	A-SI Type	Maximum operating current	-25°C	+60°C
RCCB-ID 125 A		Maximum operating current	-25°C	+40°C
iID	B-SI type	Maximum operating current	-25°C	+60°C

Note: the temperature considered is the temperature viewed through the device.

Circuit breakers

High temperatures

- A rise in temperature decreases the tripping current of the thermal protection.
- Protection is still ensured: the tripping threshold remains lower than the current acceptable by the cable (I₂)
- To prevent nuisance tripping, it should be checked that this threshold remains higher than the maximum operating current (I_n) of the circuit, defined by:
- □ the rated load currents,
- □ the coefficients of expansion and simultaneity of use.

If the temperature is sufficiently high for the tripping threshold to become lower than the operating current I_n , switchboard ventilation should be provided for.

Low temperatures

- A fall in temperature increases the tripping current of the thermal protection.
- \blacksquare There is no risk of nuisance tripping: the threshold remains higher than the maximum operating current of the circuit (I $_{\rm B}$) demanded by the loads.
- It should be checked that the cable remains suitably protected, i.e. that its acceptable current (I₂) is higher than the values shown in the following tables (in amperes).

When the ambient temperature could vary within a broad range, both these aspects must be taken into account:

- the difference between the maximum operating current of the circuit (I_B) and the tripping threshold of the circuit breaker for the minimum ambient temperature,
- the difference between the strength of the cable (I_z) and the maximum tripping threshold of the circuit breaker for the maximum ambient temperature.

100

5

Influence of ambient temperature (cont.)

Maximum permissible current

- The maximum current allowed to flow through the device depends on the ambient temperature in which it is placed.
- The ambient temperature is the temperature inside the enclosure or switchboard in which the devices are installed.
- The reference temperature is in a halftone colour for the different devices.
- When several devices operating simultaneously are mounted side by side in a small enclosure, a temperature rise in the enclosure results in a reduction in the operating current. A reduction coefficient of 0.8 will then have to be assigned to the rating (already derated, if applicable, depending on the ambient temperature).

Example:

Depending on the ambient temperature and the method of installation, the table below shows how to determine, for a C60, the operating currents not to be exceeded for ratings 25 A, 32 A and 40 A (reference temperature 50°C).

Oper	rating curr	ent no	ot to k	e exc	ceeded (A)		
cond	llation itions 60947-2)	C60 a	lone		Several C60 in (calculate with t indicated below	he reduction o	
Ambie tempe	ent erature (°C)	35 °C	50 °C	65 °C	35 °C	50 °C	65 °C
Туре	Nominal rating (A)	Actua	l rating	(A)			
C60	25	26.7	25	23.2	26.7 x 0.8 = 21.4	25 x 0.8 = 20	23.2 x 0.8 = 18.6
	32	34	32	29.9	34 x 0.8 = 27	32 x 0.8 = 25.6	29.9 x 0.8 = 24
	40	42.9	40	36.9	42.9 x 0.8 = 34.3	40 x 0.8 = 32	36.9 x 0.8 = 29.5

Influence of ambient temperature (cont.)

C60BP, C60BPR, C60SP derating table

C60BP, C60BPR, C60SP	Amt	oient '	temp	eratu	re (°C)														
Rating	-30	-25	-20	-15	-10	-5	0	+5	+10	+15	+20	+25	+30	+35	+40	+45	+50	+55	+60	+70
0.5 A	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.4	0.4	0.4	0.4
1 A	1.4	1.3	1.3	1.3	1.2	1.2	1.2	1.1	1.1	1.1	1.0	1.0	1.0	0.9	0.9	8.0	8.0	0.7	0.7	0.6
2 A	2.5	2.5	2.4	2.4	2.3	2.3	2.3	2.2	2.2	2.1	2.1	2.0	1.9	1.9	1.8	1.8	1.7	1.6	1.6	1.4
3 A	3.7	3.7	3.6	3.6	3.5	3.4	3.4	3.3	3.2	3.1	3.1	3.0	2.9	2.8	2.8	2.7	2.6	2.5	2.4	2.2
4 A	5.0	4.9	4.8	4.8	4.7	4.6	4.5	4.4	4.3	4.2	4.1	4.0	3.9	3.8	3.7	3.6	3.4	3.3	3.2	2.9
5 A	6.2	6.1	6.0	5.9	5.8	5.7	5.6	5.5	5.4	5.2	5.1	5.0	4.9	4.8	4.6	4.5	4.3	4.2	4.1	3.7
6 A	7.8	7.6	7.5	7.3	7.2	7.0	6.9	6.7	6.5	6.4	6.2	6.0	5.8	5.6	5.4	5.2	5.0	4.8	4.5	4.0
8 A	9.9	9.8	9.6	9.5	9.3	9.1	8.9	8.8	8.6	8.4	8.2	8.0	7.8	7.6	7.4	7.2	6.9	6.7	6.5	6.0
10 A	12.4	12.2	12.0	11.8	11.6	11.4	11.2	10.9	10.7	10.5	10.2	10.0	9.7	9.5	9.2	9.0	8.7	8.4	8.1	7.4
13 A	15.6	15.4	15.2	15.0	14.7	14.5	14.3	14.0	13.8	13.5	13.3	13.0	12.7	12.5	12.2	11.9	11.6	11.3	11.0	10.4
15 A	18.1	17.8	17.6	17.3	17.0	16.7	16.5	16.2	15.9	15.6	15.3	15.0	14.7	14.4	14.0	13.7	13.4	13.0	12.7	11.9
16 A	18.9	18.6	18.4	18.1	17.9	17.6	17.4	17.1	16.8	16.6	16.3	16.0	15.7	15.4	15.1	14.8	14.5	14.2	13.9	13.2
20 A	24.6	24.3	23.9	23.5	23.1	22.7	22.2	21.8	21.4	20.9	20.5	20.0	19.5	19.0	18.5	18.0	17.5	16.9	16.4	15.2
25 A	30.1	29.7	29.3	28.8	28.4	27.9	27.5	27.0	26.5	26.0	25.5	25.0	24.5	23.9	23.4	22.8	22.3	21.7	21.1	19.8
30 A	38.2	37.6	36.9	36.2	35.5	34.7	34.0	33.2	32.5	31.7	30.8	30.0	29.1	28.2	27.3	26.4	25.4	24.4	23.3	21.0
32 A	40.2	39.5	38.8	38.1	37.4	36.7	36.0	35.2	34.4	33.6	32.8	32.0	31.1	30.3	29.4	28.4	27.5	26.5	25.4	23.2
35 A	42.5	41.9	41.2	40.6	39.9	39.3	38.6	37.9	37.2	36.5	35.7	35.0	34.2	33.5	32.7	31.8	31.0	30.1	29.2	27.4
40 A	48.9	48.1	47.4	46.6	45.9	45.1	44.3	43.4	42.6	41.8	40.9	40.0	39.1	38.2	37.2	36.2	35.2	34.2	33.1	30.9
45 A	54.7	53.9	53.1	52.2	51.4	50.5	49.7	48.8	47.8	46.9	46.0	45.0	44.0	43.0	42.0	40.9	39.8	38.7	37.5	35.1
50 A	59.8	59.0	58.2	57.3	56.5	55.6	54.7	53.8	52.9	51.9	51.0	50.0	49.0	48.0	47.0	45.9	44.8	43.7	42.6	40.2
63 A	80.0	78.6	77.2	75.7	74.2	72.7	71.2	69.6	68.0	66.4	64.7	63.0	61.2	59.4	57.5	55.6	53.5	51.4	49.2	44.5

C60N, C60H, C60L, C60CTRL derating table

, , ,		,				5															
C60N, C60H, C60L, C60CTRL	Aml	oient	temp	eratı	ıre (°	C)															
Rating	-30	-25	-20	-15	-10	-5	0	+5	+10	+15	+20	+25	+30	+35	+40	+45	+50	+55	+60	+65	+70
1 A	1.31	1.3	1.28	1.27	1.25	1.23	1.21	1.19	1.17	1.15	1.13	1.11	1.09	1.07	1.05	1.02	1	0.98	0.95	0.93	0.91
2 A	2.55	2.59	2.56	2.52	2.49	2.45	2.41	2.37	2.34	2.3	2.26	2.22	2.17	2.13	2.09	2.04	2	1.95	1.91	1.88	1.84
3 A	3.81	4.04	3.98	3.92	3.85	3.79	3.73	3.66	3.59	3.52	3.45	3.38	3.31	3.23	3.16	3.08	3	2.92	2.83	2.82	2.76
4 A	4.9	4.86	4.81	4.76	4.7	4.65	4.59	4.54	4.48	4.42	4.37	4.31	4.25	4.19	4.13	4.06	4	3.94	3.87	3.81	3.74
6 A	7.93	7.82	7.71	7.6	7.49	7.38	7.27	7.15	7.03	6.91	6.79	6.66	6.54	6.41	6.27	6.14	6	5.86	5.71	5.56	5.42
10 A	13.3	13.2	13	12.8	12.6	12.4	12.2	12	11.8	11.6	11.4	11.2	10.9	10.7	10.5	10.2	10	9.8	9.5	9.2	9
13 A	17	16.9	16.6	16.4	16.2	15.9	15.7	15.4	15.2	14.9	14.7	14.4	14.1	13.9	13.6	13.3	13	12.7	12.4	12.1	11.8
16 A	20	19.8	19.5	19.3	19.1	18.8	18.6	18.4	18.1	17.9	17.6	17.3	17.1	16.8	16.6	16.3	16	15.7	15.4	15.1	14.8
20 A	26.9	26.6	26.2	25.8	25.4	25	24.6	24.2	23.7	23.3	22.9	22.4	22	21.5	21	20.5	20	19.5	18.9	18.4	17.9
25 A	32.9	32.5	32.1	31.6	31.1	30.7	30.2	29.7	29.2	28.7	28.2	27.7	27.2	26.7	26.1	25.6	25	24.4	23.8	23.2	22.6
32 A	41.5	41.1	40.5	40	39.4	38.9	38.3	37.7	37.1	36.5	35.9	35.3	34.7	34	33.4	32.7	32	31.3	30.6	29.9	29.1
40 A	53.7	52.9	52.2	51.4	50.6	49.8	49	48.2	47.3	46.5	45.6	44.7	43.8	42.9	42	41	40	39	37.9	36.9	35.8
50 A	65	64.3	63.5	62.6	61.7	60.8	59.9	59	58.1	57.1	56.2	55.2	54.2	53.2	52.1	51.1	50	48.9	47.8	46.7	45.5
63 A	85.5	84.6	83.3	82	80.7	79.4	78	76.7	75.3	73.9	72.4	70.9	69.4	67.9	66.3	64.7	63	61.3	59.5	57.8	56

Influence of ambient temperature (cont.)

N40N, N40 vigi derating table

N40N, N40 Vigi	Amb	oient	temp	eratu	re (°C)														
Rating	-25	-20	-15	-10	-5	0	+5	+10	+15	+20	+25	+30	+35	+40	+45	+50	+55	+60	+65	+70
1 A	1.66	1.62	1.59	1.55	1.51	1.47	1.43	1.39	1.35	1.3	1.26	1.21	1.16	1.11	1.06	1	0.94	0.88	0.81	0.73
2A	2.64	2.6	2.56	2.52	2.48	2.44	2.4	2.36	2.32	2.28	2.23	2.19	2.14	2.1	2.05	2	1.95	1.9	1.85	1.79
3 A	3.97	3.91	3.86	3.8	3.74	3.68	3.61	3.55	3.49	3.42	3.36	3.29	3.22	3.15	3.07	3	2.92	2.85	2.77	2.68
4 A	5.19	5.12	5.05	4.98	4.9	4.83	4.75	4.67	4.6	4.52	4.43	4.35	4.27	4.18	4.09	4	3.91	3.81	3.72	3.62
6 A	7.42	7.34	7.25	7.16	7.07	6.98	6.89	6.8	6.7	6.61	6.51	6.41	6.31	6.21	6.11	6	5.89	5.78	5.67	5.56
10 A	12.9	12.7	12.5	12.3	12.2	12	11.8	11.6	11.4	11.2	11	10.8	10.6	10.4	10.2	10	9.8	9.6	9.3	9.1
16 A	20.4	20.1	19.8	19.6	19.3	19	18.7	18.5	18.2	17.9	17.6	17.3	17	16.7	16.3	16	15.7	15.3	15	14.6
20 A	25.7	25.3	25	24.6	24.3	23.9	23.6	23.2	22.8	22.4	22	21.7	21.3	20.8	20.4	20	19.6	19.1	18.7	18.2
25 A	31.6	31.2	30.8	30.4	30	29.6	29.2	28.7	28.3	27.8	27.4	26.9	26.5	26	25.5	25	24.5	24	23.5	22.9
32 A	41.1	40.5	40	39.4	38.9	38.3	37.7	37.1	36.5	35.9	35.3	34.7	34	33.4	32.7	32	31.3	30.6	29.9	29.1
40 A	52	51.3	50.6	49.8	49.1	48.3	47.6	46.8	46	45.2	44.4	43.5	42.7	41.8	40.9	40	39.1	38.1	37.1	36.1

C60H-DC derating table

C60H-DC	Aml	oient '	temp	eratu	re (°C)														
Rating	-25	-20	-15	-10	-5	0	+5	+10	+15	+20	+25	+30	+35	+40	+45	+50	+55	+60	+65	+70
0.5 A	0.62	0.61	0.6	0.59	0.58	0.56	0.55	0.54	0.53	0.51	0.5	0.49	0.47	0.46	0.44	0.43	0.41	0.39	0.38	0.36
1 A	1.17	1.15	1.14	1.12	1.1	1.09	1.07	1.05	1.04	1.02	1	0.98	0.96	0.94	0.92	0.9	0.88	0.86	0.84	0.82
2A	2.5	2.45	2.41	2.36	2.31	2.26	2.21	2.16	2.11	2.06	2	1.94	1.88	1.82	1.76	1.7	1.63	1.56	1.48	1.41
3 A	3.71	3.65	3.58	3.51	3.45	3.38	3.3	3.23	3.16	3.08	3	2.92	2.84	2.75	2.66	2.57	2.48	2.38	2.27	2.17
4 A	4.99	4.9	4.81	4.71	4.62	4.52	4.42	4.32	4.22	4.11	4	3.89	3.77	3.65	3.53	3.4	3.27	3.13	2.98	2.83
5 A	5.92	5.83	5.74	5.66	5.57	5.48	5.39	5.29	5.2	5.1	5	4.9	4.8	4.69	4.58	4.47	4.36	4.24	4.12	4
6 A	7.15	7.04	6.94	6.83	6.71	6.6	6.48	6.37	6.25	6.12	6	5.87	5.74	5.61	5.47	5.33	5.19	5.04	4.89	4.73
10 A	12.4	12.2	11.9	11.7	11.5	11.3	11	10.8	10.5	10.3	10	9.7	9.5	9.2	8.9	8.6	8.3	7.9	7.6	7.2
13 A	15.3	15.1	14.9	14.6	14.4	14.2	14	13.7	13.5	13.3	13	12.8	12.5	12.2	12	11.7	11.4	11.1	10.8	10.5
15 A	18.3	18	17.7	17.4	17.1	16.7	16.4	16.1	15.7	15.4	15	14.6	14.3	13.9	13.5	13	12.6	12.2	11.7	11.2
16 A	19.1	18.9	18.6	18.3	18	17.6	17.3	17	16.7	16.3	16	15.7	15.3	14.9	14.6	14.2	13.8	13.4	13	12.5
20 A	23.7	23.4	23	22.7	22.3	21.9	21.6	21.2	20.8	20.4	20	19.6	19.2	18.7	18.3	17.9	17.4	16.9	16.4	15.9
25 A	29.9	29.5	29	28.5	28.1	27.6	27.1	26.6	26.1	25.5	25	24.5	23.9	23.3	22.7	22.1	21.5	20.9	20.2	19.6
30 A	36.7	36.1	35.5	34.9	34.2	33.5	32.9	32.2	31.5	30.7	30	29.2	28.5	27.7	26.8	26	25.1	24.2	23.2	22.3
32 A	37.9	37.4	36.8	36.2	35.7	35.1	34.5	33.9	33.3	32.6	32	31.4	30.7	30	29.3	28.6	27.9	27.1	26.3	25.5
40 A	48.2	47.4	46.7	45.9	45.1	44.3	43.5	42.6	41.8	40.9	40	39.1	38.2	37.2	36.2	35.2	34.2	33.1	32	30.8
50 A	59.1	58.3	57.4	56.5	55.6	54.7	53.8	52.9	52	51	50	49	48	46.9	45.9	44.8	43.6	42.5	41.3	40.1
63 A	76.9	75.6	74.3	73	71.7	70.3	68.9	67.5	66	64.5	63	61.4	59.8	58.2	56.5	54.7	52.9	51.1	49.1	47.1

RCCB

■ In all cases, the RCCB are correctly protected against overloads by a circuit breaker with a lower or equal rating, operating at the same ambient temperature.

Dissipated power, Impedance and Voltage drop

Acti9 products

The following table indicates the average dissipated power per pole in W for a current equal to the rating of the device and at the operating voltage.

Rating	(A)	0.5	1	1.6	2	2.5	3	4	6	6.3	10	12.5	13	16	20	25	32	40	45	50	63	80	100 125
RCCB																							
iID	2P													0.8		0.9		2.6			2.6	3	5
	4P															0.7		1.9			1.5	2.6	4.3

Note: When the enclosure's thermal balance, consider the 4P devices load is only on 3 phases.

Multi9 products

The following table indicates the average dissipated power per pole in W for a current equal to the rating of the device and at the operating voltage.

Rating (A)	0.5	1	2	3	4	5	6	8	10	13	15	16	20	25	30	32	35	40	45	50	63	80	100	125
Circuit breakers																								
C60BP, C60BPR, C60SP	2.6	1.3	1.7	1.9	2.0	2.2	1.2	1.7	1.9	2.4	2.3	2.6	2.2	3.4	2.5	2.8	3.5	3.6	3.9	4.8	4.8			
C60N, C60H, C60L, C60CTRL		1.3	1.7	1.9	2.0		1.2		1.9	2.4		2.6	2.2	2.7		3.2		3.6		4.8	4.3			
N40N		2.5	1.9	2.1	2.6		2.7		2.7			3.2	4.7	4.7		4.6		5.8						
C60H-DC	2.2	2.3	2.6	2.2	2.4		2.7		1.8	2.5		2.5	3	3.1		3.5		4.3		4.8	6.1			
RCCB																								
GFP A-SI Type														1,4				3.6			4.4		18	
ID AC / A-SI Type														1.4				3.6			4.4			
ID B Type														1.2				2.9			7.2	12		28
RCBO																								
N40 Vigi							4.1		3.2			3.9	4.4	4.5				6.4						
Add-on residual cu	rrent	devi	ices																					
Vigi C60 AC / A-SI Type																					3.0			
Vigi N40 AC / A-SI Type																		2.1						

Note: RCBO dissipated power per pole is the sum of circuit breaker dissipated power per pole + add-on residual current device dissipated power per pole. Example: C60N (63 A) + Vigi C60 (63 A) = 4.3 + 3.0 = 7.3 W.

Impedance calculation:

 $Z = P / I^2$

Z: impedance in Ohms

P: dissipated power in Watts (table values)

I: rating in Amperes

Voltage drop calculation:


U = P/I

U: voltage drop in Volts


P: dissipated power in Watts (table values)

I: rating in Amperes

Short-circuit current limiting

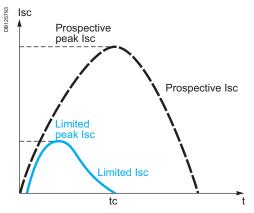

Prospective current and real limit current.

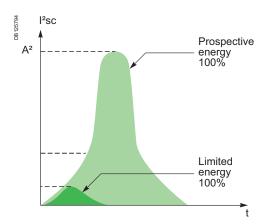

Definition

The limiting capacity of a circuit breaker is its ability to lessen the effects of a short-circuit on an electrical installation by reducing the current amplitude and the dissipated power.

Benefits of limiting

Long installation service life

Thermal effects

Lower temperature rise at the conductor level, hence increased service life for cables and all components that are not self-protected (e.g. switches, contactors, etc.)

Mechanical effects

Lower electrodynamic repulsion forces, hence less risk of deformation or breakage of electrical contacts and busbars.

Electromagnetic effects

Less interference on sensitive equipment located in the vicinity of an electric circuit.

Savings through cascading

Cascading is a technique derived directly from current limiting: downstream of a current-limiting circuit breaker it is possible to use circuit breakers of breaking capacity lower than the prospective short-circuit current (in line with the cascading tables). The breaking capacity is heightened thanks to current limiting by the upstream device. Substantial savings can be achieved in this way on switchgear and enclosures.

Discrimination of protection devices

The circuit breakers' current limiting capacity improves discrimination with the protection devices located upstream: this is because the required energy passing through the upstream protection device is greatly reduced and can be not enough to cause it to trip. Discrimination can thus be natural without having to install a time-delayed protection device upstream.

Representation: Current limiting curves

The current limiting capacity of a circuit breaker is reflected by 2 curves which give, as a function of the prospective short-circuit current (current which would flow in the absence of a protection device):

- the real peak current (limited)
- the thermal stress (in A²s), this value, multiplied by the resistance of any element through which the short-circuit current passes, gives the power dissipated by this element.

The straight line "10 ms" representing the energy A²s of a prospective short-circuit current of a half-period (10 ms) indicates the energy that would be dissipated by the short-circuit current in the absence of limiting by the protection device (see example).

Example

What is the energy limited by a C60N 25 A circuit breaker for a prospective short-circuit current of 10 kA rms. What is the quality of current limiting?

> as shown in the graph opposite:

- this short-circuit current (10 kA rms) is likely to dissipate up to 1,000 kA²s
- the C60N circuit breaker reduces this thermal stress to: 43 kA²s, which is 23 times less.

Example of use: Stresses acceptable by the cables


The following table shows the thermal stresses acceptable by the cables depending on their insulation, their composition (Cu or Al) and their cross section. Cross-section values are expressed in mm² and stresses in A²s.

S (mm²)		1.5	2.5	4	6	10
PVC	Cu	2.97 x 10 ⁴	8.26 x 10 ⁴	2.12×10^{5}	4.76 x 10 ⁵	1.32 x 10 ⁶
	ΑI					5.41 x 10⁵
PRC	Cu	4.10 x 10 ⁴	1.39 x 10 ⁵	2.92 x 10 ⁵	6.56 x 10 ⁵	1.82 x 10 ⁶
	ΑI					7.52 x 10⁵
S (mm²)		16	25	35	50	
PVC	Cu	3.4×10^6	8.26×10^6	1.62 x 10 ⁷	3.21×10^7	
	ΑI	1.39 x 10 ⁶	3.38×10^6	6.64 x 10 ⁶	1.35×10^7	
PRC	Cu	4.69 x 10 ⁶	1.39×10^7	2.23 x 10 ⁷	4.56 x 10 ⁷	
	Al	1.93 x 10 ⁶	4.70 x 10 ⁶	9.23 x 10 ⁶	1.88 x 10 ⁷	


Example

Is a Cu/PRC cable of cross section 6 mm² protected by a C60N 40 A device? The above table shows that the acceptable stress is $6.56 \times 10^5 \, A^2 s$. Any short-circuit current at the point where a C60N 40 A device (Icu = $25 \, kA$) is installed will be limited, with a thermal stress of less than $5.7 \times 10^5 \, A^2 s$.

The cable is therefore always protected up to the breaking capacity of the circuit breaker

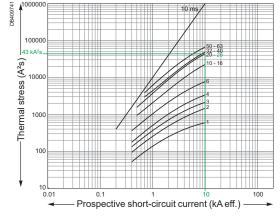

C60N Thermal stress (380-415 V AC)

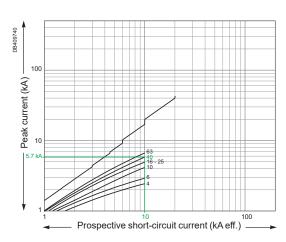


C60N Peak current (380-415 V AC)


5

Short-circuit current limiting (cont.)


Ue: 380-415 V AC

Limitation curves for network Ue: 380-415 V AC (Ph/N 220-240 V AC)

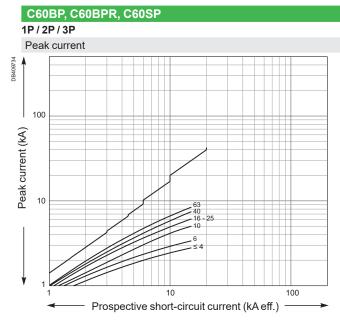

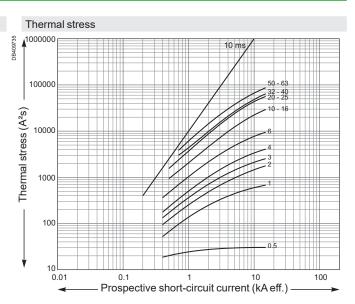



Prospective short-circuit current (kA eff.)

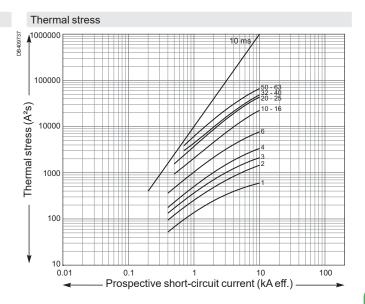


Ue: 380-415 V AC

Limitation curves for network Ue: 380-415 V AC (Ph/N 220-240 V AC)

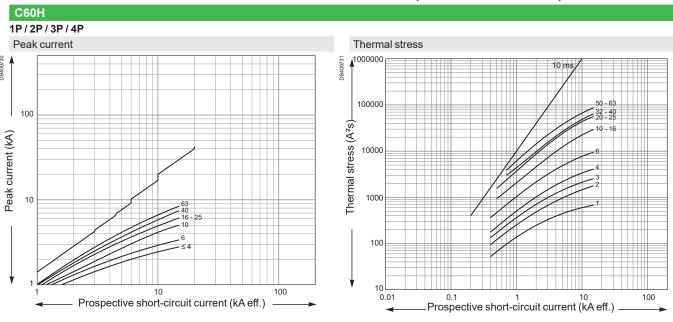


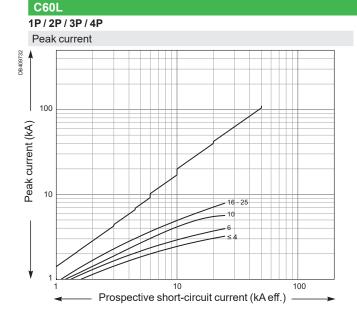

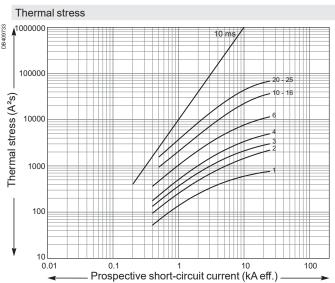


Ue: 380-415 V AC

Limitation curves for network Ue: 380-415 V AC (Ph/N 220-240 V AC)

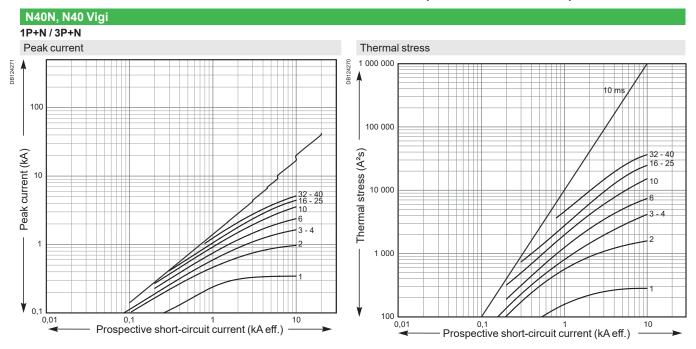


Ue: 480 V AC 60 Hz

Limitation curves for network Ue: 480 V AC 60 Hz (Ph/N 277 V AC)

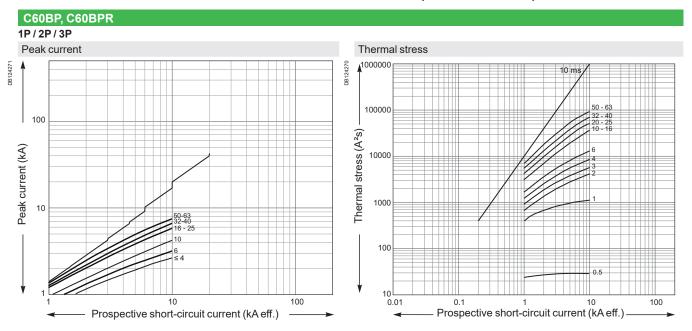


Short-circuit current limiting (cont.) Direct current network

Limitation curves for direct current network

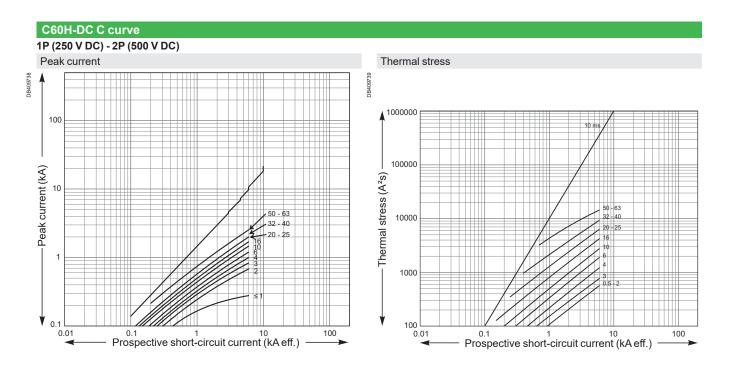

Clearance between device and bare sheet metal



Details of minimum distances between the product and earthed metal parts for device intended for use without enclosure.

Minimum clearance bewteen device and bare sheet metal (mm / inches)

UL/IEC/GB	standards			
Products	C60BP	C60BPR	C60SP, C60H-DC	C60N, C60H, C60L, C60CTRL
Α	52 mm (2.05 in)	52 mm (2.05 in)	50 mm (1.97 in)	50 mm (1.97 in)
В	10 mm (0.39 in)	10 mm (0.39 in)	20 mm (0.79 in)	20 mm (0.79 in)
С	10 mm (0.39 in)	10 mm (0.39 in)	10 mm (0.39 in)	10 mm (0.39 in)

5

Copper Multi-cables connection

Connection

Products	Rating	Copper Multi-cables				
		Rigid	Flexible without fer	rule	Flexible with ferrule	Cable stripping length
		D8112804	DB112805	DB436618		DB433451
C60BP	≤25A	2x1.5 mm ² or 2x1.5 mm ² +1			16 or 2xAWG #14 or 16+1xAWG #14	14 mm / 0.55 in
	>25A	2x4 mm² or 2x 2x1.5 mm²+1			12 or 2xAWG #10 or 16+1xAWG #14	14 mm / 0.55 in
C60SP	≤25A		2x1.5 mm ² or 2x2.5 mm ² or 2x1.5 mm ² +1x2.5 mm ²		16 or 2xAWG #14 or 16+1xAWG #14	14 mm / 0.55 in
	>25A		2x4 mm² or 2x6 mm² or 2x1.5 mm²+1x2.5 mm²		12 or 2xAWG #10 or 16+1xAWG #14	14 mm / 0.55 in
C60H-DC	≤25A	2x1.5 mm² or 2x2.5 mm² or 2x1.5 mm²+1x2.5 mm²		2xAWG #16 or 2xAWG #14 or 2xAWG #16+1xAWG #14		14 mm / 0.55 in
	>25A		2x4 mm² or 2x6 mm² or 2x1.5 mm²+1x2.5 mm²		12 or 2xAWG #10 or 16+1xAWG #14	14 mm / 0.55 in
C60N, H, L, C60CTRL	≤25A	2x1.5 mm² or 2x2.5 mm² or 2x1.5 mm²+1x2.5 mm²		2xAWG #16 or 2xAWG #14 or 2xAWG #16+1xAWG #14		14 mm / 0.55 in
	>25A	2x4 mm² or 2x 2x1.5 mm²+1;			12 or 2xAWG #10 or 16+1xAWG #14	14 mm / 0.55 in
N40N	All	2x1.5 mm² or 2x2.5 mm² or 2x1.5 mm²+1x2.5 mm²		2xAWG #16 or 2xAWG #14 or 2xAWG #16+1xAWG #14		13 mm / 0.5 in
GFP	All	2x 1.5 mm² to	2x 1.5 mm² to 10 mm²		16 to #8	14 mm / 0.55 in
RCCB ID	All	2x 1.5 mm² to	2x 1.5 mm² to 10 mm²		16 to #8	14 mm / 0.55 in
RCCB-ID 125A	All		2x 1.5 mm² to 16 mm²		16 to #6	11 mm / 0.43 in
/igi C60	All	2x4 mm² or 2x6 mm² or 2x1.5 mm²+1x2.5 mm²		2xAWG #12 or 2xAWG #10 or 2xAWG #16+1xAWG #14		14 mm / 0.55 in
/igi N40	All		2x1.5 mm ² or 2x2.5 mm ² or 2x1.5 mm ² +1x2.5 mm ²		16 or 2xAWG #14 or 16+1xAWG #14	13 mm / 0.5 in
N40 Vigi	All	2x1.5 mm² or 2x1.5mm²+1x			16 or 2xAWG #14 or 16+1xAWG #14	13 mm / 0.5 in



Discover our technical guides collection.

They are dedicated to frequent issues faced when designing an installing a control panel.

Universal Enclosures and Thermal Management Catalog



Ref.: UEMKCAT012EN



Click on QR Code or scan to download

How to reduce damage to components through effective thermal management inside an enclosure



Ref.: CPTG001_EN



Click on QR Code or scan to download

Universal Enclosures and Thermal Management Quick Selection Guide




Ref.: UEMKCAT034EN



Click on QR Code or scan to download

How to prevent machine malfunctions and electronic damage due to voltage surges



Ref.: CPTG002_EN



Click on QR Code or scan to download

Free download on www.se.com with the document reference or from the QR Codes.

How to ensure trouble-free approval of your UL-compliant control panels



Ref.: CPTG005_EN



Click on QR Code or scan to download

How to choose the circuit breaker and transfer switch for a generator set



Ref.: CPTG008_EN



Click on QR Code or scan to download

How define the right outdoor enclosure and optimize its durability



Ref.: CPTG006_EN



Click on QR Code or scan to download

How to select the appropriate motor starters for your HVAC equipments



Ref.: CPTG007_EN



Click on QR Code or scan to download

Free download on www.se.com with the document reference or from the QR Codes.

Discover our technical guides collection.

They are dedicated to frequent issues faced when designing an installing a control panel.

How to prevent condensation inside an enclosure



Ref.: UE12MK03EN



Click on QR Code or scan to download

How to select the appropriate motor control system for your pump



Ref.: CPTG010_EN



Click on QR Code or scan to download

How to choose the contactors for elevator machinery?



Ref.: CPTG009_EN



Click on QR Code or scan to download

Free download on www.se.com with the document reference or from the QR Codes.



Schneider Electric SE

35, rue Joseph Monier 92500 Rueil Malmaison

Capital social 2 302 512 148 €

19-Dec-2024 LVCATM90EM_EN

