



Harmony XALF

Lift inspection stations



Harmony

Discover **Harmony**

Advanced operator interface and industrial relays

Harmony operator interface and industrial relays enhance operational efficiency and equipment availability across industrial and building applications. **Harmony** includes intelligent connected products and edge terminals that visualize, gather and process data, enabling informed operator decisions

Explore our offer

- **Harmony** Push Buttons and Switches
- **Harmony** HMI Operator Terminals, IPC and EdgeBox
- **Harmony** Signaling Devices
- **Harmony** Electrical Relays
- **Harmony** Safety

Life Is On

Schneider
Electric

Quick access to product information

Get technical information about your product

References


Modicon TM3
I/O expansion modules for Modicon controllers
Analog I/O modules

Number and type of channels	Input range	Output range	Resolution	Aperture time (typical)	Reference	Weight (kg)
2 voltage/current inputs	-15...+15 VDC 0...25 mA A, 25 mA	15 000 of 15 000 + sign	15 000	200 ns	TM3AI2H	0.110
4 voltage/current inputs	-15...+15 VDC 0...25 mA A, 25 mA	15 000 of 15 000 + sign	15 000	200 ns	TM3AI4H	0.110
4 voltage/current or temperature inputs	-15...+15 VDC 0...25 mA A, 25 mA	15 000 of 15 000 + sign	15 000	200 ns	TM3AI4H	0.110
4 differential temperature inputs	Thermocouples (J, K, N, S, T, E, C, R, Pt100, Pt1000, Pt500, Pt200)	15 000 of 15 000 + sign	15 000	200 ns	TM3AI4H	0.110
2 voltage/current inputs	-15...+15 VDC 0...25 mA A, 25 mA	15 000 of 15 000 + sign	15 000	200 ns	TM3AI2H	0.110

Each commercial reference presented in a catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- Product image, Instruction sheet, User guide, Product certifications, End of life manual

Find your catalog

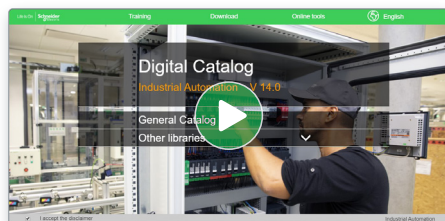

- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)


General contents

Lift inspection stations Harmony XALF

- Selection guide* [page 2](#)
- **Presentation, functions**..... [page 4](#)
- **Description**..... [page 5](#)
- **References**
 - Hoistway boxes [page 6](#)
 - Pit switch boxes [page 7](#)
 - Top of car boxes..... [page 8](#)
 - Separate components [page 9](#)
- **Product reference index**..... [page 14](#)

Type of applications	All applications			
Enclosures	Plastic		Glass-reinforced polyester	
	Complete stations and separate components for customer assembly		Empty insulated enclosures	
				
Main feature	Pre-drilled control stations		Pre-drilled or undrilled enclosures	
Associated control and signaling units	Harmony XB5 with plastic bezel		Harmony XB7, monolithic, plastic	Harmony XB4 with metal bezel Harmony XB5 with plastic bezel
Number of cut-outs for Ø 22 control and signaling units	1, 2, 3, 4 or 5	1, 2 or 3 (complete stations) 1, 2, 3, 4 or 5 (empty enclosures)	1, 2 or 3	1, 2, 4, 8 or 16
Material	Polycarbonate		ABS	Glass-reinforced polyester
Color	Yellow lid Light gray base	Dark gray lid Light gray base	Light gray or yellow lid Light gray base	Coloured gray throughout
Degree of protection	IP66, IP67, IP69, IP69K		IP54	IP65, IP69, IP69K
Function	Emergency Stop or Emergency switching off	Start or Stop Start-Stop with pilot light Motion control	According to equipment fitted: ☐ Start or Stop ☐ Start-Stop with pilot light ☐ Motion control ☐ Emergency stop	
Cable entries	Knock-outs (CM12)		Knock-outs (ISO 20)	Undrilled
Type references	XALK	XALD	XALE	XAPA

All applications			Specific applications		
Metal	Metal front plate, insulated protective rear cover		Plastic		Metal
Empty enclosures	Empty, flush mounting enclosures: front plate + rear cover		Control stations for severe environments	Lift inspection stations	Key operated control stations
					
Pre-drilled enclosures	Pre-drilled or undrilled enclosures	Pre-drilled front plates & rear covers	Pre-drilled empty control stations	Pre-drilled empty enclosures or fitted stations	Fitted stations
Harmony XB4 with metal bezel Harmony XB5 with plastic bezel			Harmony XB5 with plastic bezel	Harmony XB5 or XB7 with plastic bezel	With key lock
8, 16, 24, 30 or 40	1, 2, 3, 4, 6, 8 or 12	1, 2, 3, 4 or 5	1, 2, 3, 4 or 5	1, 2, 3, 4, 5 or 6 with or without power socket	–
Aluminium alloy or sheet steel	Zinc or aluminium alloy	Front plate: brushed aluminium Rear cover: polystyrene	Mineral reinforced polyamide	Polycarbonate	Zinc alloy
Blue lid and base	XAPD, XAPG: Grey lid & base XAPK: Yellow lid & base XAPO: Orange lid & base	Unpainted aluminium	Black lid Black base	Yellow lid Light gray base	Gray
IP54	IP65, IP69, IP69K		IP66, IP67, IP69, IP69K	IP44 (with power socket) IP55 or IP66 depending on model	IP54
According to equipment fitted: ☐ Start or Stop ☐ Start-Stop with pilot light ☐ Motion control ☐ Emergency stop					Start-Stop
☐ Tapped entries for cable-glands ☐ or undrilled	Tapped entries for cable-glands	Knock-outs (with protective rear cover)	Two ISO 20 open entries	☐ Knock-outs (CM12) ☐ or undrilled	Tapped for cable-glands
XB2SL	XAPD, XAPK, XAPG, XAPO	XAPE	XALG	XALF	XAPS

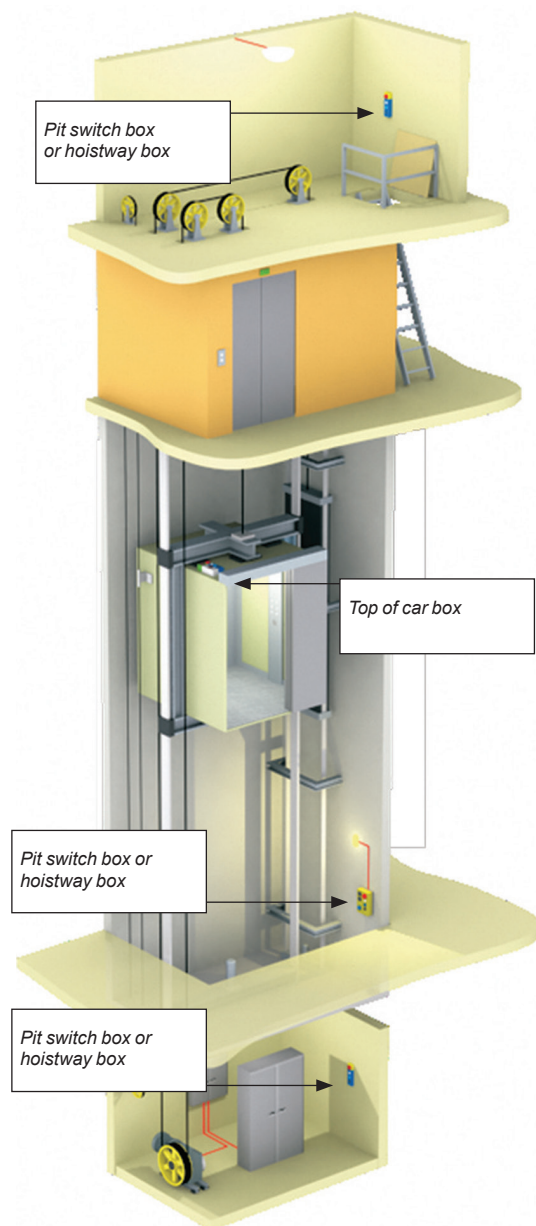

Presentation

The Harmony XALF lift inspection stations are designed for lift maintenance applications.

Three types of station are available:

- Top of car boxes
- Pit switch boxes
- Hoistway boxes

- These boxes make it possible to control movement of the lift.
- Used in conjunction with the other operating components, they facilitate inspection and repair work.
- They are installed outside the lift car.
- Inspection stations help prevent the risk of uncontrolled movement of the lift while inspections are being carried out.
- Supplied complete, these lift inspection stations are equipped with C€ certified Ø 22 control and signaling units from the Harmony XB5 and XB7 ranges.
- Stations can also be configured by the user: empty enclosures that can be equipped to meet custom requirements are available from the catalog.

Environment

- Degree of protection (conforming to standard EN/IEC 60529):
 - IP 54
 - IP 44 with power socket (see [page 11](#))
- Conformity to standards:
 - EN 81-20, EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-4, and EN/IEC 60947-5-5
 - EN/ISO 13850 (if equipped with "trigger action" Emergency Stop pushbuttons with pilot light and mechanical state indicator)
- Product certification: C€


Mounting and fixing

- Hoistway box and pit switch box: Knock-outs for no. 13 (CM12, Pg13.5) cable glands and tapped ISO 20
- Top of car box: cut-outs required

Functions

Function	Equipment
Control and signaling	■ Flush pushbuttons, unmarked or with marking (1) ■ Selector switches with standard handle or key switches ■ Pilot lights with integral LED and "true colors" ■ Illuminated pushbuttons
Emergency Stop (EN/ISO 13850)	■ Mushroom head, trigger action and latching, Emergency Stop pushbutton with pilot light and mechanical state indicator: □ White LED, on front panel □ 360° mechanical indication by green ring and by 2 windows with green/red indication on front panel
Power socket	■ Extensive range of power sockets to meet the specific needs of each country. Degree of protection IP 44.


(1) Double injection-molded marking.

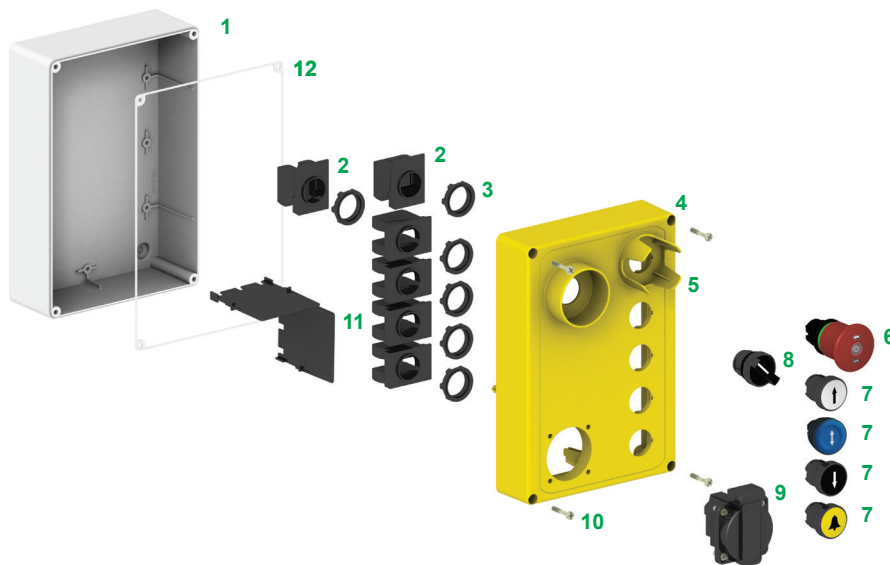

Description


Top of car boxes

- 1 Enclosure base, gray
- 2 Contact block
- 3 Nuts
- 4 Enclosure lid, yellow
- 5 Guard
- 6 Red, mushroom head, latching Emergency Stop pushbutton with pilot light (white) and mechanical state indicator (green/red)
- 7 Flush pushbuttons, with marking: ↑, ↓, ⚠
- 8 Selector switch with standard handle
- 9 230 V power socket
- 10 Stainless steel screws
- 11 Partition plates
- 12 Gasket

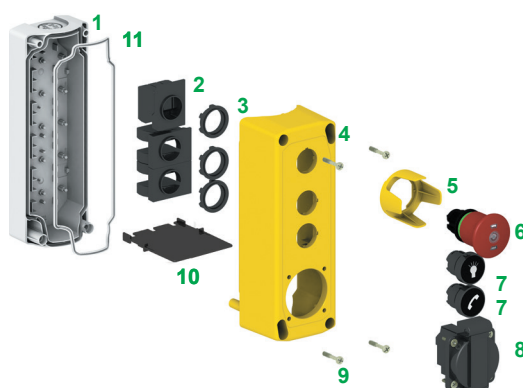

Pit switch boxes

- 1 Enclosure base, gray
- 2 Contact block
- 3 Nuts
- 4 Enclosure lid, yellow
- 5 Guard
- 6 Red, mushroom head, latching Emergency Stop pushbutton with pilot light (white) and mechanical state indicator (green/red)
- 7 Flush pushbuttons, with marking: ⚠, ⚠
- 8 230 V power socket
- 9 Stainless steel screws
- 10 Partition plate
- 11 Gasket

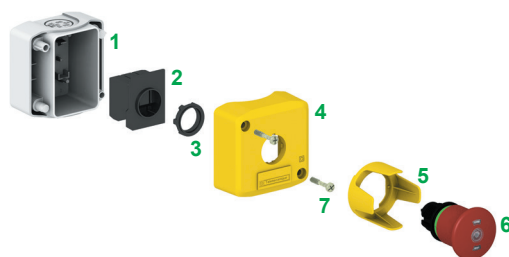

Hoistway boxes

- 1 Enclosure base, gray
- 2 Contact block
- 3 Nut
- 4 Enclosure lid, yellow
- 5 Guard
- 6 Mushroom head for latching Emergency Stop pushbutton with pilot light (white) and mechanical state indicator (green/red)
- 7 Stainless steel screws

Control stations and enclosures

Lift inspection stations

Harmony XALF

Complete stations, empty enclosures

Hoistway boxes (gray base and yellow lid)

Complete boxes

Description	Type of push	Type of contact		Shape of head	Reference	Weight kg/lb
		NO	NC			
 XALFKT64451	1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with mechanical state indicator (green/red)	1	1		XALFKT64451 0.175/0.386
			–	1		XALFKT64421 0.165/0.364
			–	2		XALFKT64441 0.175/0.386
 XALFKT6445	1 red, mushroom head Emergency Stop pushbutton	Latching, with mechanical state indicator (green/red)	1	1		XALFKT6445●11 (1) 0.185/0.408
			–	1		XALFKT6442 0.155/0.342
			–	2		XALFKT6444 0.165/0.364
 XALFKA2521	1 spring return pushbutton	Latching, with pilot light (white) and mechanical state indicator (green/red)	1	1		XALFKT6445●1 (1) 0.175/0.386
		Flush black	1	–		XALFKA2521 0.130/0.287
			1	1		XALFKA2525 0.140/0.309
 XALFKA5511	Flush yellow		2	–		XALFKA2523 0.140/0.309
			1	–		XALFKA5511 0.130/0.287
			1	1		XALFKA5515 0.140/0.309
 XALFKA2531	Flush black		2	–		XALFKA5513 0.140/0.309
			1	–		XALFKA2531 0.130/0.287
			1	1		XALFKA2535 0.140/0.309
 XALFK01			2	–		XALFKA2533 0.140/0.309

Empty enclosure for configuration by the user

Number of Ø 22 mm cut-outs	Dimensions (2) w x h x d mm/in.	Reference	Weight kg/lb
1	68 X 68 X 54 / 2.68 X 2.68 X 2.13	XALFK01	0.110/0.243

(1) Replace the ● in the reference with **B** for 24 V ~, with **G** for 110 ...120 V ~, or with **M** for 230...240 V ~.(2) Please visit our website www.schneider-electric.com for more precise information about component dimensions.

Other versions

Please contact our Customer Care Center.

Pit switch boxes (gray base and yellow lid)

Complete boxes

Description	Type of push	Type of contact		Shape of head	Reference	Weight kg/lb
		NO	NC			
1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with mechanical state indicator (green/red)	1	1		XALFK2001E	0.500/1.102
1 spring return pushbutton	1 flush black	1	—			
1 power socket (IEC blue) (1)						
1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with mechanical state indicator (green/red)	1	1		XALFK3001E	0.550/1.212
2 spring return pushbuttons	1 flush black 1 flush black	1 1	— —	 		
1 power socket (IEC blue) (1)						
1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with pilot light (white 24 V ~ / —) and mechanical state indicator (green/red)	1	1		XALFK3011E	0.550/1.212
2 spring return pushbuttons	1 flush black 1 flush yellow	1 1	— —	 		
1 power socket (IEC blue) (1)						

Empty enclosures for configuration by the user

Number of Ø 22 mm cut-outs	Number of Ø 45 mm cut-outs for power socket	Dimensions (2) w x h x d mm/in.	Reference	Weight kg/lb
3	—	68 X 196 X 147/ 2.68 X 7.72 X 5.79	XALFK03	0.290/0.639
4	—	68 X 196 X 147/ 2.68 X 7.72 X 5.79	XALFK04	0.290/0.639
2	1	68 X 196 X 147/ 2.68 X 7.72 X 5.79	XALFK021	0.290/0.639
3	1	68 X 196 X 147/ 2.68 X 7.72 X 5.79	XALFK031	0.290/0.639

(1) IEC blue power socket type [XALFZE3](#); for other types of power socket, see [page 13](#).(2) Please visit our website www.schneider-electric.com for more precise information about component dimensions.

Other versions


Please contact our Customer Care Center.



XALFK2001E




XALFK3001E



XALFK3011E



XALFK04



XALFK031

Control stations and enclosures

Lift inspection stations

Harmony XALF

Complete stations, empty enclosures



XALFP6003E




XALFP7005E



XALFK4001



XALFK4002



XALFP0714

Top of car boxes (gray base and yellow lid)

Complete boxes

Description	Type of operator	Type of contact		Shape of head	Reference	Weight kg/lb
		NO	NC			
1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with mechanical state indicator (green/red)	1	1		XALFP6003E	0.810/1.786
4 spring return pushbuttons	1 flush white	2	—			
	1 flush blue	1	—			
	1 flush black	2	—			
	1 flush yellow	1	—			
1 selector switch, with guard	Standard black handle, 2-position stay put	3	3			
1 power socket (IEC blue) (1)						
1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with pilot light (white 24 V ~/-) and mechanical state indicator (green/red)	1	1		XALFP7005E	0.850/1.873
4 spring return pushbuttons	1 flush white	2	—			
	1 flush blue	1	—			
	1 flush black	2	—			
	1 flush yellow	1	—			
2 selector switches, with guard	Standard black handle, 2-position stay put	2	2			
	Standard black handle, 3-position spring return to center	1	1			
1 power socket (IEC blue) (1)						
1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with mechanical state indicator (green/red)	1	1		XALFK4001	0.550/1.213
2 spring return pushbuttons	1 flush white	2	—			
	1 flush black	2	—			
1 selector switch, with guard	Standard black handle, 2-position stay put	2	2			
1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with mechanical state indicator (green/red)	1	1		XALFK4002	0.495/1.091
1 spring return pushbuttons	1 flush blue	2	—			
1 spring return pushbuttons	1 double-head	2	—			
1 selector switch, with guard	Standard black handle, 2-position stay put	2	2			

Empty enclosures for configuration by the user

Number of Ø 22 mm cut-outs	Number of Ø 45 mm cut-outs for power socket	Dimensions (2) w x h x d mm/in.	Reference	Weight kg/lb
6	1	150 X 220 X 172 / 5.91 X 8.66 X 6.77	XALFP0612	0.500/1.102
	0	150 X 220 X 172 / 5.91 X 8.66 X 6.77	XALFP0602	0.500/1.102
7	1	150 X 220 X 172 / 5.91 X 8.66 X 6.77	XALFP0714	0.500/1.102
	0	150 X 220 X 172 / 5.91 X 8.66 X 6.77	XALFP0704	0.500/1.102

(1) IEC blue power socket type XALFZE3; for other types of power socket, see page 13.

(2) Please visit our website www.schneider-electric.com for more precise information about component dimensions.

Other versions

Please contact our Customer Care Center.

Heads to combine with bodies:
see page 12



Pushbuttons, switches, and pilot lights for user assembly

Heads only

Description	Type of push	Marking Symbol	Color	Color of push	Reference	Weight kg/lb
Heads for spring return pushbuttons	Flush		Black	Yellow	ZB5AA551	0.018/0.040
			Black	White	ZB5AA334	0.018/0.040
			White	Blue	ZB5AA651	0.018/0.040
			White	Black	ZB5AA335	0.018/0.040
			White	Black	ZB5AA252	0.018/0.040
			White	Black	ZB5AA253	0.018/0.040
	Flush, illuminated (1)		—	Orange	ZB5AA58	0.018/0.040
Illuminated mushroom head for Emergency Stop trigger action and mechanical latching pushbuttons (2)	Push-pull Ø 40 mm/1.57 in. With pilot light (3) and mechanical state indicator		—	Red	ZB5AT8643M	0.034/0.075

Selector switches and key switches for user assembly

Heads only

Description	Type of operator	Shape of head	Number and type of positions	Reference	Weight kg/lb
Heads for selector switches	Standard handle, black		2 - stay put	ZB5AD2	0.025/0.055
			3 - spring return to center	ZB5AD5	0.025/0.055
	Key switch with key no. 455 (4)		2 - stay put (5)	ZB5AG2	0.050/0.110
Heads for illuminated selector switches with standard handle (3)	Standard handle, green		2 - stay put	ZB5AK1233	0.021/0.046

Protected
LED

(1) For insertion of legend.

(2) Conforming to standards EN/IEC 60204-1 and EN/ISO 13850, to Machinery Directive 98/37/EC, and to standard EN/IEC 60947-5-5.

(3) For use with bodies comprising a light source with integral LED. For light blocks and body fixing collar, see page 12. Maximum number of contacts attached to the associated body: 2.

(4) Other key numbers available:

- Key no. 421E: add suffix **12** to the reference
- Key no. 458A: add suffix **10** to the reference
- Key no. 520E: add suffix **14** to the reference
- Key no. 3131A: add suffix **20** to the reference

Example: For a switch head with key no. 421E, 2-position stay put with key withdrawal from the left-hand position, the reference becomes: **ZB5AG212**. For specific keys with other numbers, please contact our Customer Care Center.

(5) The symbol indicates key withdrawal position(s).

Other versions

Specific markings on boxes
Other power sockets
Special cut-outs in enclosures
Customized products

Please contact our Customer Care Center.

Lift inspection stations

Harmony XALF

Separate components: Ø 22 mm control and signaling units with plastic bezel

PF 100406



XB7EV08GP

Pilot lights

With integral LED

Shape of head	Type of light source (included)	Color of lens	Sold in lots of	Unit reference by supply voltage (1)			Weight kg/lb
				24 V ~/-	120 V ~	230 V ~	
	Integral LED	Green	10	XB7EV03BP	XB7EV03GP	XB7EV03MP	0.020/0.044
		Red	10	XB7EV04BP	XB7EV04GP	XB7EV04MP	0.020/0.044
		Yellow	10	XB7EV05BP	XB7EV05GP	XB7EV05MP	0.020/0.044
		Blue	10	XB7EV06BP	XB7EV06GP	XB7EV06MP	0.020/0.044
		Clear	10	XB7EV07BP	XB7EV07GP	XB7EV07MP	0.020/0.044
		Orange	10	XB7EV08BP	XB7EV08GP	XB7EV08MP	0.020/0.044

Integral LED

Pilot lights with integral LED

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Complete units

Description	Shape of head	Supply voltage V	Color	Reference	Weight kg/lb
Pilot lights with plain lens		24 V (50/60 Hz)	White	XB5AVB1 (ZB5AVB1 + ZB5AV013)	0.038/0.084
			Green	XB5AVB3 (ZB5AVB3 + ZB5AV033)	0.038/0.084
			Red	XB5AVB4 (ZB5AVB4 + ZB5AV043)	0.038/0.084
			Orange	XB5AVB5 (ZB5AVB5 + ZB5AV053)	0.038/0.084
			Blue	XB5AVB6 (ZB5AVB6 + ZB5AV063)	0.038/0.084
			White	XB5AVG1 (ZB5AVG1 + ZB5AV013)	0.038/0.084
		110...120 V (50/60 Hz)	Green	XB5AVG3 (ZB5AVG3 + ZB5AV033)	0.038/0.084
			Red	XB5AVG4 (ZB5AVG4 + ZB5AV043)	0.038/0.084
			Orange	XB5AVG5 (ZB5AVG5 + ZB5AV053)	0.038/0.084
			Blue	XB5AVG6 (ZB5AVG6 + ZB5AV063)	0.038/0.084
			White	XB5AVM1 (ZB5AVM1 + ZB5AV013)	0.038/0.084
		230...240 V (50/60 Hz)	Green	XB5AVM3 (ZB5AVM3 + ZB5AV033)	0.038/0.084
			Red	XB5AVM4 (ZB5AVM4 + ZB5AV043)	0.038/0.084
			Orange	XB5AVM5 (ZB5AVM5 + ZB5AV053)	0.038/0.084
			Blue	XB5AVM6 (ZB5AVM6 + ZB5AV063)	0.038/0.084

(1) For Faston connection version (1 x 6.35 mm and 2 x 2.8 mm), add the number "3" to the end of the reference.
Example: **XB7EV07BP** becomes XB7EV07BP3.

101293



XB5AVB1

Protected LED

PF 130008



XALFZE2

Power sockets

Description	For use in	Color	Sold in lots of	Unit reference	Weight kg/lb
230 V power socket, with protective shutter (protection: IP 44)	Germany	Black	1	XALFZE2	0.050/0.110
		Blue	1	XALFZE3	0.050/0.110
	France	Gray	1	XALFZF8	0.050/0.110
	Italy	Blue	1	XALFZT3	0.050/0.110
	United Kingdom	Black	1	XALFZB2	0.050/0.110
	Switzerland	Blue	1	XALFZS3	0.050/0.110

10/750



ZB5SZ3

Accessories

Description	Application	Sold in lots of	Unit reference	Weight kg/lb
Partition plates	For 230 V power socket	1	XALFZ1	0.010/0.022
Nut	Fixing the head of Ø 22 mm/0.86 in. control and signaling units	10	ZB5AZ901	0.002/0.004
Plastic blanking plug, round, black (supplied with nut ZB5AZ901)	Ø 22 mm/0.86 in. cut-outs for circular heads	10	ZB5SZ3	0.009/0.020

Bodies for Ø 22 mm control and signaling units with screw clamp terminal connections ⁽¹⁾

Description	For use with	Type of contact		Reference	Weight kg/lb
		NO	NC		
Fixing collar + single contact block with screw clamp terminal connections	Heads for ZB5 pushbuttons	1	–	ZB5AZ101	0.021/0.046
		–	1	ZB5AZ102	0.021/0.046
		2	–	ZB5AZ103	0.030/0.066
		–	2	ZB5AZ104	0.030/0.066
		1	1	ZB5AZ105	0.030/0.066




Description	For use with	Supply voltage V	Color of light source	Type of contact		Reference	Weight kg/lb
				NO	NC		
Fixing collar + single contact block with screw clamp terminal connections + light block with integral LED	ZB5AA58	24 ~	Orange	1	–	ZB5AW0B51	0.032/0.071


Protected[®]
LED

Contact blocks with screw clamp terminal connections

Description	For use with	Sold in lots of	Type of contact		Unit reference	Weight kg/lb
			NO	NC		
Standard single contact blocks (2) (3)	Heads for ZB5 pushbuttons	5	1	–	ZBE101	0.011/0.024
		5	–	1	ZBE102	0.011/0.024

**Light blocks with screw clamp terminal connections**

Description	For use with	Supply voltage V	Color of light source	Sold in lots of	Unit reference	Weight kg/lb
Light blocks with integral LED (to combine with heads for integral LED)	ZB5AA58	24 ~	Orange	5	ZBVB5	0.017/0.037
		48...120 ~	Orange	5	ZBVG5	0.017/0.037
		230...240 ~	Orange	5	ZBVM5	0.017/0.037
	ZB5AK1233	24 ~	Green	5	ZBVB3	0.017/0.037
		48...120 ~	Green	5	ZBVG3	0.017/0.037
		230...240 ~	Green	5	ZBVM3	0.017/0.037
	ZB5AT8643M	24 ~	White	5	ZBVB1	0.017/0.037
		48...120 ~	White	5	ZBVG1	0.017/0.037
		230...240 ~	White	5	ZBVM1	0.017/0.037



Protected[®]
LED

Accessories





Description	For use with	Supply voltage V	Level of protection	Unit reference	Weight kg/lb
Body/fixing collar Sold in lots of 10	Standard single contact blocks or light blocks with integral LED	–	–	ZB5AZ009	0.006/0.013
LED suppressors for high power applications (≥ 30 VA)	Light blocks with integral LED	120 ~	25...120 VA	ZBZVG	0.010/0.022
		230 ~	30...230 VA	ZBZVM	0.010/0.022



(1) Can be equipped with additional contact blocks.

(2) The contact blocks enable variable composition of body/contact assemblies. Maximum number of rows possible: 3. Either 3 rows of 3 single contacts or 1 row of 3 double contacts + 1 row of 3 single contacts (double contacts occupy 2 rows).

(3) For use with body/fixing collar [ZB5AZ009](#).

Contact blocks for printed circuit board connection ⁽¹⁾

Description	Type of contact	For use with	Sold in lots of	Unit reference	Weight kg/lb
Standard contact blocks	NO	Heads for ZB5 pushbuttons	10	ZBE701	0.011/0.024
	NC				
Specific contact blocks for low power switching with gold flashed contacts	1	Heads for ZB5 pushbuttons	10	ZBE7016	0.011/0.024
	–				

Light blocks for printed circuit board connection ⁽¹⁾

Description	Supply voltage V	For use with	Color of LED	Sold in lots of	Unit reference	Weight kg/lb
Integral LED (to combine with heads for integral LED)	24 ~	ZB5AA58	Orange	5	ZBVB57	0.004/0.009
		ZB5AK1233	Green	5	ZBVB37	0.004/0.009
		ZB5AT8643M	White	5	ZBVB17	0.004/0.009

Protected LED

Adapter (socket) for printed circuit board

For use with	Thickness of printed circuit board mm/in.	Sold in lots of	Unit reference	Weight kg/lb
Electrical block (contact or light)	1.6 ± 0.20/0.06 ± 0.01	10	ZBZ010	0.008/0.018
	2.2 ± 0.2/0.09 ± 0.01	10	ZBZ011	0.008/0.018
	3.2 ± 0.2/0.13 ± 0.01	10	ZBZ012	0.008/0.018

Accessories specifically for printed circuit board mounting ⁽¹⁾

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Fixing collar/pillar	Printed circuit board support	10	ZB5AZ079	0.003/0.007
Fixing screw for printed circuit board	Fixing collar/pillar ZB5AZ079	10	ZBZ006	0.011/0.024

Accessory for mushroom head pushbuttons

Description	Color	Unit reference	Weight kg/lb
Plastic guard for Emergency Stop function	Yellow	ZBZ4005	0.011/0.024

⁽¹⁾ For details of panel and printed circuit board cut-outs, please visit our website www.schneider-electric.com. This is to be used in conjunction with adapter (socket) **ZBZ010**.

X		
XALFK01	6	XB7EV06GP 10
XALFK03	7	XB7EV06MP 10
XALFK04	7	XB7EV07BP 10
XALFK021	7	XB7EV07GP 10
XALFK031	7	XB7EV07MP 10
XALFK2001E	7	XB7EV08BP 10
XALFK3001E	7	XB7EV08GP 10
XALFK3011E	7	XB7EV08MP 10
XALFK4001	8	
XALFK4002	8	Z
XALFKA2521	6	ZB5AA58 9
XALFKA2523	6	ZB5AA252 9
XALFKA2525	6	ZB5AA253 9
XALFKA2531	6	ZB5AA334 9
XALFKA2533	6	ZB5AA335 9
XALFKA2535	6	ZB5AA551 9
XALFKA5511	6	ZB5AA651 9
XALFKA5513	6	ZB5AD2 9
XALFKA5515	6	ZB5AD5 9
XALFKT6442	6	ZB5AG2 9
XALFKT6444	6	ZB5AK1233 9
XALFKT6445	6	ZB5AT8643M 9
XALFKT64421	6	ZB5AW0B51 12
XALFKT64441	6	ZB5AZ009 12
XALFKT64451	6	ZB5AZ079 13
XALFP0602	8	ZB5AZ101 12
XALFP0612	8	ZB5AZ102 12
XALFP0704	8	ZB5AZ103 12
XALFP0714	8	ZB5AZ104 12
XALFP6003E	8	ZB5AZ105 12
XALFP7005E	8	ZB5AZ901 11
XALFZ1	11	ZB5SZ3 11
XALFZB2	11	ZBE101 12
XALFZE2	11	ZBE102 12
XALFZE3	11	ZBE701 13
XALFZF8	11	ZBE702 13
XALFZS3	11	ZBE7016 13
XALFZT3	11	ZBE7026 13
XB5AVB1	10	ZBVB1 12
XB5AVB3	10	ZBVB3 12
XB5AVB4	10	ZBVB5 12
XB5AVB5	10	ZBVB17 13
XB5AVB6	10	ZBVB37 13
XB5AVG1	10	ZBVB57 13
XB5AVG3	10	ZBVG1 12
XB5AVG4	10	ZBVG3 12
XB5AVG5	10	ZBVG5 12
XB5AVG6	10	ZBVM1 12
XB5AVM1	10	ZBVM3 12
XB5AVM3	10	ZBVM5 12
XB5AVM4	10	ZBZ006 13
XB5AVM5	10	ZBZ010 13
XB5AVM6	10	ZBZ011 13
XB7EV03BP	10	ZBZ012 13
XB7EV03GP	10	ZBZ4005 13
XB7EV03MP	10	ZBZVG 12
XB7EV04BP	10	ZBZVM 12
XB7EV04GP	10	
XB7EV04MP	10	
XB7EV05BP	10	
XB7EV05GP	10	
XB7EV05MP	10	
XB7EV06BP	10	

mySchneider, your personalized digital experience

Access an all-in-one customized online experience and benefit from tailored business services, resources, and tools to efficiently support your business operations.

- **Efficiency:** In just a few clicks, find all the information and support you need to get the job done.
- **Simplicity:** Use a single login to access all business services, in one place, available 24/7. You no longer need to log in to multiple platforms.
- **Personalization:** Benefit from content, tools, and business services tailored to your activity, and customize your landing page based on your preferences.

Watch the How-to Videos



Order management

- > [Select Products and Add to Cart](#)
- > [Check for Products' Price and Availability](#)
- > [Order Products with Generic Commercial References](#)




Product information

- > [Find a Product Data Sheet and Related Documents](#)
- > [Select Products and Add to Cart](#)
- > [Stay Up to Date on the Status of My Products](#)



Support

- > [Get Quicker Answers Thanks to Online Support](#)



Training

- > [Access Trainings Dedicated to My Activity](#)

[Create your account](#)

Life Is On

Schneider
Electric

Legal information

The information provided in this Catalog contains description of Schneider Electric products, solutions and services ("Offer") with technical specifications and technical characteristics of the performance of the corresponding Offer.

The content of this document is subject to revision at any time without notice due to continued progress in methodology, design and manufacturing.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any type of damages arising out of or in connection with (i) informational content of this Catalog not conforming with or exceeding the technical specifications, or (ii) any error contained in this Catalog, or (iii) any use, decision, act or omission made or taken on basis of or in reliance on any information contained or referred to in this Catalog.

SCHNEIDER ELECTRIC MAKES NO WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO WHETHER THIS CATALOG OR ANY INFORMATION CONTAINED THEREIN SUCH AS PRODUCTS AND SERVICES WILL MEET REQUIREMENTS, EXPECTATIONS OR PURPOSE OF ANY PERSON MAKING USE THEREOF.

Schneider Electric brand and any trademarks of Schneider Electric and its subsidiaries referred to in this Catalog are property of Schneider Electric or its subsidiaries. All other brands are trademarks of their respective owners.

This Catalog and its content are protected under applicable copyright laws and provided for informative use only. No part of this Catalog may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Copyright, intellectual, and all other proprietary rights in the content of this Catalog (including but not limited to software, audio, video, text, and photographs) rests with Schneider Electric or its licensors. All rights in such content not expressly granted herein are reserved. No rights of any kind are licensed or assigned or shall otherwise pass to persons accessing this information.

Life Is On



Learn more about our products at
www.se.com

Design: Schneider Electric
Photos: Schneider Electric

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier - CS 30323
F-92500 Rueil-Malmaison Cedex
France

DIA4ED2070703EN
October 2024 - V6.1