

Product Environmental Profile

Exiway Trend Activa-link IP65 1250 lumen






General information

Reference product	Exiway Trend Activa-link IP65 1250 lumen - OVA47225
Description of the product	Wireless Maintained and non Maintained Emergency Luminaire compliant to EN 60598-2-22
Functional unit	Self-Contained Emergency Lighting Luminaire, supplied by LiFePo batteries. Duration and Flux can be configured. The luminaire is connected to the cloud, tests are automatic and compliant to EN 62034. Report is generated automatically from the APP. This function is provided for ten years.
Additional similar product references	OVA47222 OVA47223 OVA47224 OVA47122 OVA47123 OVA47124 OVA47125 OVA47131 OVA47133



Constituent materials

Reference product mass	580 g	including the product, its packaging and additional elements and accessories
------------------------	-------	--

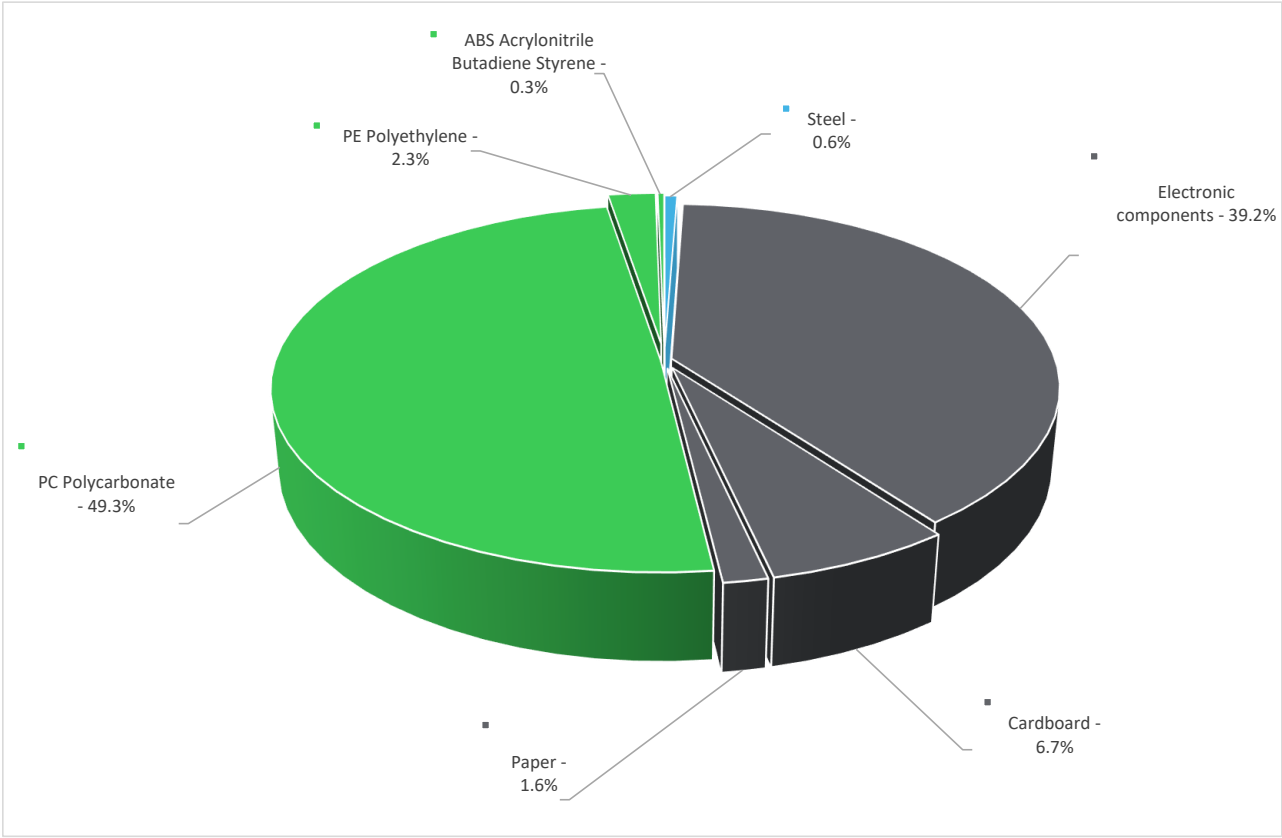

Plastics	51,90%
Metals	0,60%
Others	47,50%



Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<https://www.se.com/ww/en/work/support/green-premium/>



Additional environmental information

End Of Life	Recyclability potential:	75%	Recyclability rate has been calculated based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	-----	--



Environmental impacts

Reference service life time	10 years			
Installation elements	During the installation phase, the packaging must be disposed off Wall/ceiling/surface/recessed mounting			
Use scenario	The product is in stand-by mode 99% of the time with a power consumption of 0,4W and in active mode 1% of the time with a power consumption of 5W for 10 years.			
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product			
Geographical representativeness	Europe			
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Production mix; Low voltage; IT	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27

The life cycle analysis is compliant with the specific rules applicable to Self-contained emergency electrical equipment PSR-0007-ed1.1-2015 10 16, available on the website www.pep-ecopassport.org

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report

and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators			Exiway Trend Activa-link IP65 1250 lumen - OVA47225					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	3,40E+01	1,20E+01	1,67E-01	9,07E-02	2,05E+01	1,20E+00	-4,31E-02
Contribution to climate change-fossil	kg CO2 eq	3,39E+01	1,20E+01	1,67E-01	8,66E-02	2,05E+01	1,19E+00	-4,24E-02
Contribution to climate change-biogenic	kg CO2 eq	1,08E-01	5,53E-02	0*	4,03E-03	3,93E-02	9,58E-03	-6,29E-04
Contribution to climate change-land use and land use change	kg CO2 eq	5,47E-06	2,75E-06	0*	0*	2,73E-06	0*	0,00E+00
Contribution to ozone depletion	kg CFC-11 eq	1,06E-05	6,06E-06	1,48E-07	6,00E-09	4,37E-06	2,29E-08	-4,78E-09
Contribution to acidification	mol H+ eq	1,78E-01	5,57E-02	7,27E-04	3,60E-04	1,15E-01	6,19E-03	-2,44E-04
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	4,84E-03	2,40E-03	0*	6,55E-07	2,43E-03	3,39E-06	-2,07E-07
Contribution to eutrophication marine	kg N eq	3,49E-02	1,29E-02	3,34E-04	9,53E-05	1,80E-02	3,63E-03	-3,76E-05
Contribution to eutrophication, terrestrial	mol N eq	3,07E-01	9,95E-02	3,62E-03	7,20E-04	2,00E-01	3,45E-03	-3,58E-04
Contribution to photochemical ozone formation - human health	kg COVNM eq	8,46E-02	3,38E-02	1,19E-03	1,92E-04	4,83E-02	1,12E-03	-1,06E-04
Contribution to resource use, minerals and metals	kg Sb eq	5,62E-04	4,54E-04	0*	0*	1,09E-04	0*	-8,16E-06
Contribution to resource use, fossils	MJ	6,27E+02	1,70E+02	2,03E+00	9,44E-01	4,50E+02	3,68E+00	-6,34E-01
Contribution to water use	m3 eq	2,00E+02	6,95E+01	0*	3,87E-02	6,80E+01	6,27E+01	-2,16E-02

Additional indicators for the French regulation are available as well

Inventory flows Indicators			Exiway Trend Activa-link IP65 1250 lumen - OVA47225					
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	8,35E+01	4,78E+00	0*	6,77E-02	7,83E+01	2,78E-01	1,04E-01
Contribution to use of renewable primary energy resources used as raw material	MJ	1,73E-01	1,73E-01	0*	0*	0*	0*	-1,76E-01
Contribution to total use of renewable primary energy resources	MJ	8,36E+01	4,95E+00	0*	6,77E-02	7,83E+01	2,78E-01	-7,27E-02
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5,72E+02	1,58E+02	2,03E+00	9,44E-01	4,08E+02	3,68E+00	-7,18E-01
Contribution to use of non renewable primary energy resources used as raw material	MJ	1,27E+01	1,27E+01	0*	0*	0*	0*	8,35E-02
Contribution to total use of non-renewable primary energy resources	MJ	5,85E+02	1,70E+02	2,03E+00	9,44E-01	4,08E+02	3,68E+00	-6,34E-01
Contribution to use of secondary material	kg	4,64E-02	4,64E-02	0*	0*	0*	0*	0,00E+00
Contribution to use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to net use of freshwater	m³	3,27E+00	1,62E+00	0*	9,01E-04	1,32E-02	1,64E+00	-5,04E-04
Contribution to hazardous waste disposed	kg	5,40E+01	5,30E+01	0*	0*	2,99E-01	6,82E-01	-6,44E-01
Contribution to non hazardous waste disposed	kg	1,14E+01	8,40E+00	0*	2,95E-01	2,30E+00	4,29E-01	-2,75E-01
Contribution to radioactive waste disposed	kg	1,74E-02	1,69E-02	3,32E-05	3,96E-05	4,82E-04	1,72E-05	-2,13E-05
Contribution to components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to materials for recycling	kg	5,45E-02	1,36E-03	0*	4,98E-02	0*	3,33E-03	0,00E+00
Contribution to materials for energy recovery	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to exported energy	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to biogenic carbon content of the product	kg de C	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0,00E+00	0*	0*	0*	0*	0*	0,00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00943-V01.01-EN	Drafting rules	PEP-PCR-ed4-2021 09 06
Verifier accreditation N°	VH18	Supplemented by	PSR-0007-ed1.1-2015 10 16
Date of issue	07/2023	Information and reference documents	EF 3.0 method is applied www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal External X			
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			



Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>
 35, rue Joseph Monier
 CS 30323
 F- 92500 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.se.com

SCHN-00943-V01.01-EN

Published by Schneider Electric

©2023 - Schneider Electric – All rights reserved

07/2023