Product Environmental Profile

Acti9 - Switch Disconnector iSW - 4P - 63 A - 415 V

Representative of all Acti9 Switch Disconnector iSW










General information

Reference product	Acti9 - Switch Disconnector iSW - 4P - 63 A - 415 V - A9S65463
Description of the product	This Acti9 iSW product is a modular and reliable switch disconnector. it is a 4P, rated current is 63A, and operating voltage is 415VAC. The degree of protection is IP20 and IP40 in an enclosure. It is DIN rail mountable. The dimensions are (W) 72mm x (H) 85mm x (D) 73mm. This switch disconnector is used for control and isolation. This product complies with EN/IEC 60947-3 standard.
Description of the range	The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology. The products of the range are: Representative of all Acti9 Switch Disconnector iSW
Functional unit	Establish, support and interrupt the rated current I = 63A and rated voltage U = 415V, and if applicable the specific specifications, for an enclosure / cabinet installation, in the Household/Commercial application areas, according to the appropriate use scenario, and for the reference service life of the product of 20 years.
Specifications are:	I = Rated operating current (63A) U = Rated operating voltage (415V) Low Voltage (AC) IP20 & IP40

Constituent materials

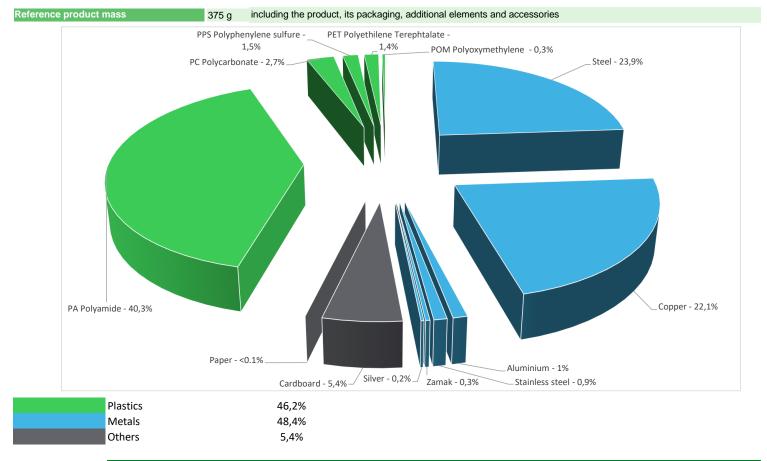

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website $\frac{\text{https://www.se.com}}{\text{total}}$

(19) Additional environmental information

End Of Life

Recyclability potential:

50%

The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Environmental impacts

Reference service life time	20 years									
Product category	Switches - Enclosure / cabinet - Household / Commercial									
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study									
Electricity consumtion	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligable consumption									
Installation elements	The product does not require any installation opera	The product does not require any installation operations								
Use scenario	Load rate = 20 % of 63A (I) Use rate = 30% of 20 years (RLT)									
Time representativeness	The collected data are representative of the year 2025									
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and représentaive of the actual type of technologies used to make the product.									
Geographical	Final assembly site Use phase End-of-life									
representativeness	Europe Europe Europe									
	[A1 - A3]	[A5]	[B6]	[C1 - C4]						
Energy model used	Electricity Mix; Low voltage; 2020; Hungary, HU No energy used Electricity Mix; Low voltage; 2020; Europe, EU-27 Global, European and French datasets are used.									

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.se.com/contact

Mandatory Indicators	Acti9 - Switch Disconnector iSW - 4P - 63 A - 415 V - A9S65463							
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	7,59E+00	2,29E+00	3,21E-02	2,26E-02	4,33E+00	9,12E-01	-5,99E-01
Contribution to climate change-fossil	kg CO2 eq	7,49E+00	2,30E+00	3,21E-02	2,15E-02	4,23E+00	8,95E-01	-6,05E-01
Contribution to climate change-biogenic	kg CO2 eq	9,86E-02	0*	0*	1,07E-03	9,57E-02	1,72E-02	5,77E-03
Contribution to climate change-land use and land use change	kg CO2 eq	1,25E-05	1,22E-05	0*	0*	0*	2,86E-07	0,00E+00
Contribution to ozone depletion	kg CFC-11 eq	7,89E-07	7,61E-07	0*	2,93E-10	1,86E-08	9,45E-09	-1,16E-07
Contribution to acidification	mol H+ eq	5,11E-02	2,48E-02	2,15E-04	6,61E-05	2,27E-02	3,36E-03	-1,63E-02
Contribution to eutrophication, freshwater	kg P eq	6,15E-04	6,62E-05	0*	5,17E-07	1,04E-05	5,38E-04	-1,33E-06
Contribution to eutrophication marine	kg N eq	5,36E-03	2,01E-03	1,01E-04	2,87E-05	2,65E-03	5,68E-04	-4,75E-04
Contribution to eutrophication, terrestrial	mol N eq	7,27E-02	2,19E-02	1,11E-03	2,00E-04	4,25E-02	6,93E-03	-5,42E-03
Contribution to photochemical ozone formation - human health	kg COVNM eq	1,79E-02	7,33E-03	2,82E-04	4,58E-05	8,41E-03	1,87E-03	-2,56E-03
Contribution to resource use, minerals and metals	kg Sb eq	8,09E-04	7,90E-04	0*	0*	1,40E-06	1,75E-05	-2,29E-04
Contribution to resource use, fossils	MJ	1,70E+02	4,18E+01	4,48E-01	2,24E-01	1,04E+02	2,32E+01	-1,25E+01
Contribution to water use	m3 eq	2,10E+00	1,17E+00	0*	1,74E-03	3,28E-01	6,00E-01	-8,40E-01

Inventory flows Indicators	Acti9 - Switch Disconnector iSW - 4P - 63 A - 415 V - A9S65463							
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2,58E+01	1,07E+00	0*	2,93E-02	2,43E+01	4,23E-01	-3,80E-01
Contribution to use of renewable primary energy resources used as raw material	MJ	7,53E-01	7,53E-01	0*	0*	0*	0*	-3,12E-01
Contribution to total use of renewable primary energy resources	MJ	2,66E+01	1,83E+00	0*	2,93E-02	2,43E+01	4,23E-01	-6,92E-01
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1,65E+02	3,70E+01	4,48E-01	2,24E-01	1,04E+02	2,32E+01	-1,25E+01
Contribution to use of non renewable primary energy resources used as raw material	MJ	4,81E+00	4,81E+00	0*	0*	0*	0*	0,00E+00
Contribution to total use of non-renewable primary energy resources	MJ	1,70E+02	4,18E+01	4,48E-01	2,24E-01	1,04E+02	2,32E+01	-1,25E+01
Contribution to use of secondary material	kg	2,27E-04	2,27E-04	0*	0*	0*	0*	0,00E+00
Contribution to use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to net use of freshwater	m³	4,89E-02	2,72E-02	0*	4,06E-05	7,67E-03	1,40E-02	-1,96E-02
Contribution to hazardous waste disposed	kg	2,40E+01	2,39E+01	0*	0*	1,20E-01	0*	-1,95E+01
Contribution to non hazardous waste disposed	kg	2,15E+00	1,29E+00	1,13E-03	9,66E-03	6,53E-01	1,98E-01	-4,12E-01
Contribution to radioactive waste disposed	kg	9,36E-04	7,72E-04	8,03E-07	1,19E-06	1,54E-04	8,32E-06	-2,24E-04
Contribution to components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to materials for recycling	kg	1,89E-01	5,20E-03	0*	0*	0*	1,84E-01	0,00E+00
Contribution to materials for energy recovery	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to exported energy	MJ	2,80E-03	5,82E-05	0*	9,22E-04	0*	1,82E-03	0,00E+00

^{*} represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product kg of C 0,00E+00 Contribution to biogenic carbon content of the associated packaging kg of C 5,94E-03

^{*} The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Mandatory Indicators				Acti9 - Switch	Disconnec	tor iSW	- 4P - 63	A - 415 V - A9S	65463
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	4,33E+00	0*	0*	0*	0*	0*	4,33E+00	0*
Contribution to climate change-fossil	kg CO2 eq	4,23E+00	0*	0*	0*	0*	0*	4,23E+00	0*
Contribution to climate change-biogenic	kg CO2 eq	9,57E-02	0*	0*	0*	0*	0*	9,57E-02	0*
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	1,86E-08	0*	0*	0*	0*	0*	1,86E-08	0*
Contribution to acidification	mol H+ eq	2,27E-02	0*	0*	0*	0*	0*	2,27E-02	0*
Contribution to eutrophication, freshwater	kg P eq	1,04E-05	0*	0*	0*	0*	0*	1,04E-05	0*
Contribution to eutrophication marine	kg N eq	2,65E-03	0*	0*	0*	0*	0*	2,65E-03	0*
Contribution to eutrophication, terrestrial	mol N eq	4,25E-02	0*	0*	0*	0*	0*	4,25E-02	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	8,41E-03	0*	0*	0*	0*	0*	8,41E-03	0*
Contribution to resource use, minerals and metals	kg Sb eq	1,40E-06	0*	0*	0*	0*	0*	1,40E-06	0*
Contribution to resource use, fossils	MJ	1,04E+02	0*	0*	0*	0*	0*	1,04E+02	0*
Contribution to water use	m3 eq	3,28E-01	0*	0*	0*	0*	0*	3,28E-01	0*

Inventory flows Indicators				Acti9 - Switch E	Disconnec	tor iSW	- 4P - 63	A - 415 V - A9S	65463
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding enewable primary energy used as raw material	MJ	2,43E+01	0*	0*	0*	0*	0*	2,43E+01	0*
ntribution to use of renewable primary energy resources ed as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
ribution to total use of renewable primary energy urces	MJ	2,43E+01	0*	0*	0*	0*	0*	2,43E+01	0*
oution to use of non renewable primary energy excluding newable primary energy used as raw material	MJ	1,04E+02	0*	0*	0*	0*	0*	1,04E+02	0*
ution to use of non renewable primary energy ses used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
ution to total use of non-renewable primary energy es	MJ	1,04E+02	0*	0*	0*	0*	0*	1,04E+02	0*
tion to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
ution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
ution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
oution to net use of freshwater	m³	7,67E-03	0*	0*	0*	0*	0*	7,67E-03	0*
oution to hazardous waste disposed	kg	1,20E-01	0*	0*	0*	0*	0*	1,20E-01	0*
oution to non hazardous waste disposed	kg	6,53E-01	0*	0*	0*	0*	0*	6,53E-01	0*
ution to radioactive waste disposed	kg	1,54E-04	0*	0*	0*	0*	0*	1,54E-04	0*
ution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
ution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
ution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
bution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2.2, database version 2024-01 in compliance with ISO14044, EF3,1 method is applied, for biogenic carbon storage, assessment methodology -1/1 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-01376-V01.01-EN	Drafting rules	PCR-4-ed4-EN-2021 09 06						
		Supplemented by	PSR-0005-ed3.1-EN-2023 12 08						
Verifier accreditation N°	VH48	Information and reference documents	www.pep-ecopassport.org						
Date of issue	03-2025	Validity period	5 years						
Independent verification of the	Independent verification of the declaration and data, in compliance with ISO 14025: 2006								
Internal	External X								
The PCR review was conducted	The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)								

PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022

The components of the present PEP may not be compared with components from any other program.

Document complies with ISO 14025:2006 "Environmental labels and declarations. Type III environmental declarations"



Schneider Flectric Industries SAS

Country Customer Care Center http://www.se.com/contact

Head Office 35, rue Joseph Monier CS 30323 F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 928 298 512 €

www.se.com

SCHN-01376-V01.01-EN

Published by Schneider Electric

©2024 - Schneider Electric - All rights reserved

03-2025