Product Environmental Profile


PanelSeT SM Normal Steel Monobloc enclosure





General information

Reference product	PanelSeT SM Normal Steel Monobloc enclosure - NSYSM18840P
Description of the product	The main purpose of the PanelSeT SM Enclosures is to protect electrical equipment of low-voltage switchgear and control gear assemblies.
Description of the range	Single product
Functional unit	Protect people from direct contact with live active parts and ensure the grouping of control, command and protection devices in a single enclosure or cabinet having the following dimensions $H \times L \times D$ or an assembly of X enclosures or cabinets having the following dimensions $H \times L \times D$ or an assembly of X enclosures or cabinets having the following dimensions $H \times L \times D$ or an assembly of X enclosures or cabinets having the following dimensions $H \times L \times D$ or an assembly of X enclosures or cabinets having the following dimensions $H \times L \times D$ or an assembly of X enclosures or cabinets having the following dimensions $H \times L \times D$ or an assembly of X enclosures or cabinets having the following dimensions $H \times L \times D$, with rated current In, while protecting them against mechanical impacts (IK) and the penetration of solid objects and liquids (IP), according to the appropriate use scenario, and for the reference service life of the product of 20 years.
Specifications are:	H = 1800mm L = 800mm D = 400mm IP = IP55-IEC 60529 IK = IK10-IEC 62262

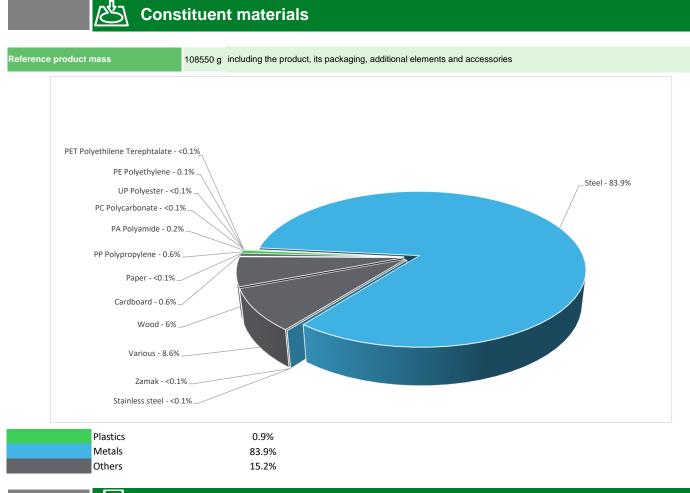

E | Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website https://www.se.com

(1) Additional environmental information

```
End Of Life Recyclability potential:
```

ential: 89%

The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Reference service life time	20 years					
Product category	Unequipped enclosures					
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study					
Electricity consumtion	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligable consumption					
Installation elements	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).					
Use scenario	There is no use scenario to be considered					
Time representativeness	The collected data are representative of the year 2025					
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and Representative of the actual type of technologies used to make the product.					
Geographical representativeness	France					
Energy model used	[A1 - A3] Electricity Mix; Low voltage; 2020; Spain, ES	[A5] Electricity Mix; Low voltage; 2020; Europe, EU-27	[B6] Electricity Mix; Low voltage; 2020; Europe, EU-27	[C1 - C4] Electricity Mix; Low voltage; 2020; Europe, EU-27		

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.se.com/contact

Mandatory Indicators	PanelSeT SM Normal Steel Monobloc enclosure - NSYSM18840P							
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	9.68E+02	4.71E+02	2.15E+02	1.54E+01	0*	2.67E+02	-3.22E+02
Contribution to climate change-fossil	kg CO2 eq	9.73E+02	4.86E+02	2.15E+02	5.67E+00	0*	2.67E+02	-3.24E+02
Contribution to climate change-biogenic	kg CO2 eq	-5.32E+00	-1.50E+01	0*	0*	0*	0*	2.57E+00
Contribution to climate change-land use and land use change	kg CO2 eq	2.75E-06	2.75E-06	0*	0*	0*	0*	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	2.56E-04	6.70E-05	1.89E-04	0*	0*	5.60E-08	-4.81E-05
Contribution to acidification	mol H+ eq	3.31E+00	1.52E+00	8.85E-01	5.96E-03	0*	9.03E-01	-1.92E+00
Contribution to eutrophication, freshwater	kg (PO4)³⁻ eq	1.02E-03	7.28E-04	2.51E-05	3.75E-05	0*	2.29E-04	-5.18E-04
Contribution to eutrophication, marine	kg N eq	8.92E-01	2.91E-01	4.03E-01	2.21E-03	0*	1.95E-01	-1.89E-01
Contribution to eutrophication, terrestrial	mol N eq	9.67E+00	3.15E+00	4.37E+00	2.07E-02	0*	2.14E+00	-2.20E+00
Contribution to photochemical ozone formation - human health	kg COVNM eq	3.28E+00	1.10E+00	1.46E+00	5.73E-03	0*	7.14E-01	-7.68E-01
Contribution to resource use, minerals and metals	kg Sb eq	3.22E-03	3.23E-03	0*	0*	0*	0*	-1.04E-01
Contribution to resource use, fossils	MJ	4.63E+04	2.55E+04	2.67E+03	1.63E+01	0*	1.81E+04	-7.63E+03
Contribution to water use	m3 eq	2.40E+02	1.34E+02	1.09E+01	6.81E-01	0*	9.43E+01	-1.40E+02

Inventory flows Indicators		PanelSeT SM Normal Steel Monobloc enclosure - NSYSM18840P						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to renewable primary energy used as energy	MJ	1.40E+02	1.14E+02	1.74E-02	2.58E+01	0*	2.42E-01	-5.80E+01
Contribution to renewable primary energy used as raw materia	I MJ	1.47E+02	1.47E+02	0*	0*	0*	0*	-4.30E+01
Contribution to total renewable primary energy	MJ	2.87E+02	2.61E+02	0*	2.58E+01	0*	2.42E-01	-1.01E+02
Contribution to non renewable primary energy used as energy	MJ	4.61E+04	2.53E+04	2.67E+03	1.63E+01	0*	1.81E+04	-7.62E+03
Contribution to non renewable primary energy used as raw material	MJ	2.20E+02	2.20E+02	0*	0*	0*	0*	-1.01E+01
Contribution to total non renewable primary energy	MJ	4.63E+04	2.55E+04	2.67E+03	1.63E+01	0*	1.81E+04	-7.63E+03
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of fresh water	m ³	5.59E+00	3.13E+00	2.53E-01	1.58E-02	0*	2.19E+00	-3.26E+00
Contribution to hazardous waste disposed	kg	6.95E+01	6.94E+01	1.78E-01	2.22E-02	0*	0*	-8.21E+03
Contribution to non hazardous waste disposed	kg	1.33E+02	1.15E+02	2.18E-01	5.86E+00	0*	1.25E+01	-2.69E+02
Contribution to radioactive waste disposed	kg	7.74E-02	3.36E-02	4.26E-02	2.41E-04	0*	8.84E-04	-1.21E-01
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	9.92E+01	1.22E+01	0*	1.90E+00	0*	8.50E+01	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	2.89E+00	4.08E-01	0*	1.64E+00	0*	8.41E-01	0.00E+00
* represents less than 0.01% of the total life cycle of the reference flow								
Contribution to biogenic carbon content of the product	kg of C	0.00E+00						

۰y Contribution to biogenic carbon content of the associated kg of C 2.65E+00

* The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2.2, database version 2024-01 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP110923EN_V4	Drafting rules	PCR-4-ed4-EN-2021 09 06				
		Supplemented by	PSR-0005-ed3.1-EN-2023 12 08				
Date of issue	02-2025	Information and reference documents	www.pep-ecopassport.org				
		Validity period	5 years				
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016							
Internal External							
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)							
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022							
The components of the present PEP may not be compared with components from any other program.							
Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"							

Schneider Electric Industries SAS Country Customer Care Center http://www.se.com/contact 35, rue Joseph Monier CS 30323 F- 92500 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 928 298 512 €

www.se.com ENVPEP110923EN_V4

packaging

Published by Schneider Electric ©2024 - Schneider Electric - All rights reserved

02-2025