Product Environmental Profile

TeSys Deca Contactor 115A 3P 230VAC

TeSys Deca








General information

Reference product	LC1D115P7				
Description of the product	The main purpose of the product is to switch on and off electrical power supply of a downstream installation with an electrical and/or mechanical control.				
Description of the range	The range product report includes :rated current:115A-150A,TeSys Deca contactor ,the representative product used for analysis is 115A (product number: LC1D115P7)				
	The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.				
Functional unit	Switch on and off during 20 years electrical power supply of a downstream installation with an electrical and/or mechanical control. The functional unit is characterized by a type 3NO, a control circuit voltage 230V AC, a power circuit voltage 1000V and a rated operational current 150 A.				

Constituent materials

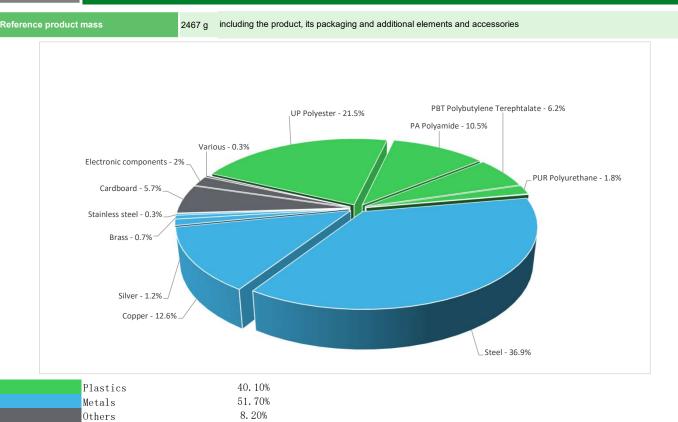

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/

(19) Additional environmental information

End Of Life

Recyclability potential:

54%

Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

Tenvironmental impacts

Reference service life time	20 years					
Product category	Contactor, remote control switch, combinations, starters					
Installation elements	Ref LC1D115P7 does not require any installation operations.					
Use scenario	Load factor : 50% of Ip Use rate: 50% of the RLT					
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production					
Geographical representativeness	France					
	[A1 - A3]	[A5]	[B6]	[C1 - C4]		
Energy model used	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; FR	Electricity Mix; Production mix; Low voltage; FR	Electricity Mix; Production mix; Low voltage; FR		

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Mandatory Indicators			TeSys Deca Contactor 115A 3P 230VAC - LC1D115P7					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Benefits
impact indicators	Onic	Total	[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	1.08E+02	2.11E+01	7.11E-01	2.51E-01	8.14E+01	4.19E+00	-3.44E+01
Contribution to climate change-fossil	kg CO2 eq	1.05E+02	1.83E+01	7.11E-01	2.40E-01	8.11E+01	4.13E+00	-3.33E+01
Contribution to climate change-biogenic	kg CO2 eq	3.05E+00	2.77E+00	0*	1.12E-02	2.10E-01	6.06E-02	-1.09E+00
Contribution to climate change-land use and land use change	kg CO2 eq	1.01E-06	3.55E-09	0*	0*	0*	1.01E-06	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	4.52E-06	2.63E-06	6.28E-07	1.66E-08	1.20E-06	5.21E-08	-6.89E-06
Contribution to acidification	mol H+ eq	7.20E-01	2.28E-01	3.09E-03	9.98E-04	4.71E-01	1.78E-02	-1.02E+00
Contribution to eutrophication, freshwater	kg (PO4)³¯ eq	6.16E-03	1.37E-04	0*	1.82E-06	3.87E-03	2.15E-03	-5.33E-05
Contribution to eutrophication marine	kg N eq	9.65E-02	2.69E-02	1.42E-03	2.64E-04	6.48E-02	3.11E-03	-2.60E-02
Contribution to eutrophication, terrestrial	mol N eq	1.28E+00	2.93E-01	1.54E-02	1.99E-03	9.32E-01	3.63E-02	-3.03E-01
Contribution to photochemical ozone formation - human health	kg COVNM eq	3.00E-01	9.19E-02	5.05E-03	5.33E-04	1.92E-01	1.08E-02	-1.51E-01
Contribution to resource use, minerals and metals	kg Sb eq	5.27E-02	5.26E-02	0*	0*	3.85E-05	6.06E-05	-1.37E-02
Contribution to resource use, fossils	MJ	1.62E+04	3.79E+02	8.64E+00	2.62E+00	1.56E+04	1.99E+02	-6.86E+02
Contribution to water use	m3 eq	1.41E+01	5.04E+00	3.61E-02	1.07E-01	5.89E+00	3.04E+00	-5.10E+01

Additional indicators for the French regulation are available as well

Inventory flows Indicators			TeSys Deca Contactor 115A 3P 230VAC - LC1D115P7					
Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Benefits	
Unit	lotai	[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]	
MJ	1.46E+03	1.25E+01	0*	1.88E-01	1.44E+03	1.46E+00	-2.45E+01	
MJ	2.74E+00	2.74E+00	0*	0*	0*	0*	-2.44E+00	
MJ	1.46E+03	1.53E+01	0*	1.88E-01	1.44E+03	1.46E+00	-2.69E+01	
ng MJ	1.62E+04	3.54E+02	8.64E+00	2.62E+00	1.56E+04	1.99E+02	-6.86E+02	
MJ	2.55E+01	2.55E+01	0*	0*	0*	0*	0.00E+00	
MJ	1.62E+04	3.79E+02	8.64E+00	2.62E+00	1.56E+04	1.99E+02	-6.86E+02	
kg	7.26E-05	7.26E-05	0*	0*	0*	0*	0.00E+00	
MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
m³	3.56E-01	1.20E-01	8.40E-04	2.50E-03	1.37E-01	9.58E-02	-1.19E+00	
kg	1.98E+02	1.94E+02	0*	0*	1.21E+00	2.37E+00	-1.17E+03	
kg	1.88E+01	9.84E+00	0*	8.18E-01	7.82E+00	2.74E-01	-2.15E+01	
kg	6.65E-03	3.09E-03	1.41E-04	1.10E-04	3.29E-03	2.35E-05	-8.83E-03	
kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
kg	1.34E+00	0*	0*	1.38E-01	0*	1.20E+00	0.00E+00	
kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
	MJ MJ MJ MJ MJ MJ MJ MJ MJ MJ	MJ 1.46E+03 MJ 2.74E+00 MJ 1.46E+03 MJ 1.62E+04 MJ 2.55E+01 MJ 1.62E+04 kg 7.26E-05 MJ 0.00E+00 MJ 0.00E+00 m³ 3.56E-01 kg 1.98E+02 kg 1.88E+01 kg 0.00E+00 kg 0.00E+00 MJ 0.00E+00 kg 0.00E+00 kg 0.00E+00	Unit Total Manufact. [A1 - A3] MJ 1.46E+03 1.25E+01 MJ 2.74E+00 2.74E+00 MJ 1.46E+03 1.53E+01 MJ 1.62E+04 3.54E+02 MJ 2.55E+01 2.55E+01 MJ 1.62E+04 3.79E+02 kg 7.26E-05 7.26E-05 MJ 0.00E+00 0* m³ 3.56E-01 1.20E-01 kg 1.98E+02 1.94E+02 kg 1.88E+01 9.84E+00 kg 6.65E-03 3.09E-03 kg 0.00E+00 0* kg 0.00E+00 0* MJ 0.00E+00 0* kg de C 0.00E+00 0*	Unit Total Manufact. [A1 - A3] Distribution [A4] MJ 1.46E+03 1.25E+01 0° MJ 2.74E+00 2.74E+00 0° MJ 1.46E+03 1.53E+01 0° MJ 1.62E+04 3.54E+02 8.64E+00 MJ 2.55E+01 2.55E+01 0° MJ 1.62E+04 3.79E+02 8.64E+00 kg 7.26E-05 7.26E-05 0° MJ 0.00E+00 0° 0° MJ 0.00E+00 0° 0° m³ 3.56E-01 1.20E-01 8.40E-04 kg 1.98E+02 1.94E+02 0° kg 1.88E+01 9.84E+00 0° kg 0.00E+00 0° 0° kg 0.00	Unit Total Manufact. [A1 - A3] Distribution [A4] Installation [A5] MJ 1.46E+03 1.25E+01 0° 1.88E-01 MJ 2.74E+00 2.74E+00 0° 0° MJ 1.46E+03 1.53E+01 0° 1.88E-01 MJ 1.62E+04 3.54E+02 8.64E+00 2.62E+00 MJ 1.62E+04 3.79E+02 8.64E+00 2.62E+00 kg 7.26E-05 7.26E-05 0° 0° MJ 0.00E+00 0° 0° 0° kg 1.98E+02 1.94E+02 0° 0° kg 6.65E-03 3.09E-03 1.41E-04 1.10E-04 kg 0.00E+00 0° 0° 0° kg 0.00E+00 0° 0° 0° kg <td>Unit Total Manufact. [A1 - A3] Distribution [A3] Installation [B1 - B7] Use [B1 - B7] MJ 1.48E+03 1.25E+01 0* 1.88E-01 1.44E+03 MJ 2.74E+00 2.74E+00 0* 0* 0* MJ 1.46E+03 1.53E+01 0* 1.88E-01 1.44E+03 MJ 1.62E+04 3.54E+02 8.64E+00 2.62E+00 1.56E+04 MJ 1.62E+04 3.79E+02 8.64E+00 2.62E+00 1.56E+04 kg 7.26E-05 7.26E-05 0* 0* 0* MJ 0.00E+00 0* 0* 0* 1.21E+00 kg 1.88E+01 9.84E+00 0* 8.18E-01 7</td> <td>Unit Total Manufact. [A1 - A3] Distribution [A4] Installation [B1 - B7] Use End of Life [C1 - C4] MJ 1.46E+03 1.25E+01 0° 1.88E-01 1.44E+03 1.46E+00 MJ 2.74E+00 2.74E+00 0° 0° 0° 0° 0° MJ 1.46E+03 1.53E+01 0° 1.88E-01 1.44E+03 1.46E+00 MJ 1.62E+04 3.54E+02 8.64E+00 2.62E+00 1.56E+04 1.99E+02 MJ 1.62E+04 3.79E+02 8.64E+00 2.62E+00 1.56E+04 1.99E+02 kg 7.26E-05 7.26E-05 0° 0° 0° 0° MJ 0.00E+00 0° 0° 0° 0° 0° 0° MJ 0.00E+00 0° 0° 0° 0° 0° 0° 0° m² 3.56E-01 1.20E-01 8.40E-04 2.50E-03 1.37E-01 9.58E-02 2.7E+00 2.7E+00 2.7E+00 2.7E+00 2.3E-05<</td>	Unit Total Manufact. [A1 - A3] Distribution [A3] Installation [B1 - B7] Use [B1 - B7] MJ 1.48E+03 1.25E+01 0* 1.88E-01 1.44E+03 MJ 2.74E+00 2.74E+00 0* 0* 0* MJ 1.46E+03 1.53E+01 0* 1.88E-01 1.44E+03 MJ 1.62E+04 3.54E+02 8.64E+00 2.62E+00 1.56E+04 MJ 1.62E+04 3.79E+02 8.64E+00 2.62E+00 1.56E+04 kg 7.26E-05 7.26E-05 0* 0* 0* MJ 0.00E+00 0* 0* 0* 1.21E+00 kg 1.88E+01 9.84E+00 0* 8.18E-01 7	Unit Total Manufact. [A1 - A3] Distribution [A4] Installation [B1 - B7] Use End of Life [C1 - C4] MJ 1.46E+03 1.25E+01 0° 1.88E-01 1.44E+03 1.46E+00 MJ 2.74E+00 2.74E+00 0° 0° 0° 0° 0° MJ 1.46E+03 1.53E+01 0° 1.88E-01 1.44E+03 1.46E+00 MJ 1.62E+04 3.54E+02 8.64E+00 2.62E+00 1.56E+04 1.99E+02 MJ 1.62E+04 3.79E+02 8.64E+00 2.62E+00 1.56E+04 1.99E+02 kg 7.26E-05 7.26E-05 0° 0° 0° 0° MJ 0.00E+00 0° 0° 0° 0° 0° 0° MJ 0.00E+00 0° 0° 0° 0° 0° 0° 0° m² 3.56E-01 1.20E-01 8.40E-04 2.50E-03 1.37E-01 9.58E-02 2.7E+00 2.7E+00 2.7E+00 2.7E+00 2.3E-05<	

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP060301EN_V4	Drafting rules	PEP-PCR-ed4-2021 09 06			
Verifier accreditation N°		Supplemented by	PSR-0005-ed2-2016 03 29			
Date of issue	2024/02/04	Information and reference documents	www.pep-ecopassport.org			
		Validity period	5 years			
Independent verification of the declaration and data, in compliance with ISO 14021: 2016						
Internal X	X External					
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (Ddemain)						
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019						
The elements of the present PEP cannot be compared with elements from another program.						
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »						

Schneider Electric Industries SAS
Country Customer Care Center
http://www.schneider-electric.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.se.com

Published by Schneider Electric

2024/02/04

ENVPEP060301EN_V4 ©2023 - Schneider Electric – All rights reserved