Product Environmental Profile

TeSys Giga electronic thermal overload relay

TeSys LRG






General information

Reference product	TeSys Giga electronic thermal overload relay - LR9G225
Description of the product	The main purpose of thermal overload relays is to detect overload currents in order to protect the motor
Description of the range	The range product report includes :Electronic thermal overload relay, TeSys Giga, Thermal protection adjustment range 28-630 A,the representative product used for analysis is 57-225A (product number: LR9G225) The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	Other switchgear and controlgear solutions mentioned in the scope (e.g. fuses TC32, all-or-nothing relays TC94, Measuring relays and protection equipment TC95), apply the general rules of PCR and mention in the accompanying report the functional unit, the reference product characteristics, the reference lifetime and the use scenario which are applied consistently with the relevant IEC technical standards.
Specifications are	Switch on and off electrical power supply of a downstream installation with an electrical and mechanical control. The function unit is characterized by 3 poles,self-powered by motor current in bus bar, with thermal protection adjustment range 57~225A,motor's rated voltage up to 1000VAC.

Constituent materials

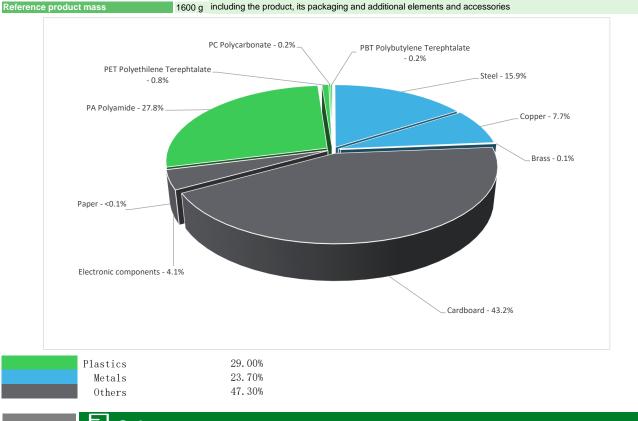

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/

(1) Additional environmental information

End Of Life

42%

Recyclability potential

The recyclability rate was calculated from the recycling rates of each material making up the product with the exception of data using the ESR database. For materials or components using the ESR database or the absence of data the conservative hypothesis "0% recyclability" was used.

\mathcal{O} Environmental impacts

Reference service life time	20 years									
Product category	Other equipments - Passive product - non-continuous operation									
Installation elements	The product does not require any installation of	operations								
Use scenario	Active energy consumption is 4.25W with 30%	s use time, for 20 years life time								
Time representativeness	The collected data are representative of the year 2023									
Technological representativeness	The Modules of Technologies such as materia analysis (LCA EIME in the case) are Similar an									
Geographical representativeness	Rest of the World									
	[A1 - A3] [A5] [B6] [C1 - C4]									
Energy model used	Electricity Mix; Low voltage; 2018; China, CN	Electricity Mix; Low voltage; 2018; China, CN	Electricity Mix; Low voltage; 2018; China, CN	Electricity Mix; Low voltage; 2018; China, CN						

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Mandatory Indicators	TeSys Giga electronic thermal overload relay - LR9G225									
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads		
Contribution to climate change	kg CO2 eq	2.23E+02	1.49E+01	2.42E-01	5.09E-02	2.06E+02	2.38E+00	-1.26E+00		
Contribution to climate change-fossil	kg CO2 eq	2.23E+02	1.47E+01	2.42E-01	5.09E-02	2.06E+02	2.36E+00	-1.23E+00		
Contribution to climate change-biogenic	kg CO2 eq	2.64E-01	2.09E-01	0*	0*	2.95E-02	2.58E-02	-2.60E-02		
Contribution to climate change-land use and land use change	kg CO2 eq	6.29E-06	5.85E-06	0*	0*	0*	4.40E-07	0.00E+00		
Contribution to ozone depletion	kg CFC-11 eq	2.71E-06	1.52E-06	3.71E-10	1.08E-09	1.17E-06	1.47E-08	-2.25E-07		
Contribution to acidification	mol H+ eq	1.65E+00	1.07E-01	1.53E-03	3.63E-04	1.54E+00	6.59E-03	-2.63E-02		
Contribution to eutrophication, freshwater	kg (PO4)³⁻ eq	1.08E-03	2.32E-04	0*	1.32E-07	4.34E-05	8.00E-04	-1.84E-06		
Contribution to eutrophication marine	kg N eq	1.79E-01	1.18E-02	7.18E-04	1.71E-04	1.65E-01	1.29E-03	-8.63E-04		
Contribution to eutrophication, terrestrial	mol N eq	2.01E+00	1.21E-01	7.88E-03	1.75E-03	1.86E+00	1.52E-02	-1.01E-02		
Contribution to photochemical ozone formation - human health	kg COVNM eq	5.97E-01	4.04E-02	1.99E-03	4.18E-04	5.50E-01	4.20E-03	-4.58E-03		
Contribution to resource use, minerals and metals	kg Sb eq	2.58E-03	2.55E-03	0*	0*	2.64E-06	2.54E-05	-4.67E-04		
Contribution to resource use, fossils	MJ	3.61E+03	2.19E+02	3.37E+00	0*	3.33E+03	5.76E+01	-2.67E+01		
Contribution to water use	m3 eq	1.40E+01	3.78E+00	0*	6.53E-02	9.07E+00	1.04E+00	-1.37E+00		

Inventory flows Indicators	TeSys Giga electronic thermal overload relay - LR9G225									
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads		
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.48E+02	0*	0*	0*	3.52E+02	6.20E-01	-6.88E-01		
Contribution to use of renewable primary energy resources used as raw material	MJ	1.56E+01	1.56E+01	0*	0*	0*	0*	0.00E+00		
Contribution to total use of renewable primary energy resources	MJ	3.64E+02	1.15E+01	0*	0*	3.52E+02	6.20E-01	-6.88E-01		
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.59E+03	2.05E+02	3.37E+00	0*	3.33E+03	5.76E+01	-2.67E+01		
Contribution to use of non renewable primary energy resources used as raw material	MJ	1.43E+01	1.43E+01	0*	0*	0*	0*	0.00E+00		
Contribution to total use of non-renewable primary energy resources	MJ	3.61E+03	2.19E+02	3.37E+00	0*	3.33E+03	5.76E+01	-2.67E+01		
Contribution to use of secondary material	kg	1.45E-05	1.45E-05	0*	0*	0*	0*	0.00E+00		
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00		
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00		
Contribution to net use of freshwater	m³	3.26E-01	8.80E-02	0*	1.52E-03	2.11E-01	2.47E-02	-3.19E-02		
Contribution to hazardous waste disposed	kg	7.90E+01	7.26E+01	0*	0*	6.25E+00	6.36E-02	-3.90E+01		
Contribution to non hazardous waste disposed	kg	6.11E+01	2.41E+01	8.49E-03	7.01E-01	3.58E+01	4.97E-01	-8.04E-01		
Contribution to radioactive waste disposed	kg	4.14E-03	2.64E-03	6.05E-06	9.04E-07	1.47E-03	2.10E-05	-3.74E-04		
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00		
Contribution to materials for recycling	kg	4.29E-01	5.55E-02	0*	0*	0*	3.74E-01	0.00E+00		
Contribution to materials for energy recovery	kg	8.58E-12	8.58E-12	0*	0*	0*	0*	0.00E+00		
Contribution to exported energy	MJ	4.24E-03	5.77E-04	0*	0*	0*	3.66E-03	0.00E+00		

 * represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product	kg of C	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg of C	1.93E-01

Mandatory Indicators		TeSys Giga	electronic	thermal	overlo	ad relay - L	R9G225		
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	2.06E+02	0*	0*	0*	0*	0*	2.06E+02	0*
ontribution to climate change-fossil	kg CO2 eq	2.06E+02	0*	0*	0*	0*	0*	2.06E+02	0*
ontribution to climate change-biogenic	kg CO2 eq	2.95E-02	0*	0*	0*	0*	0*	2.95E-02	0*
ontribution to climate change-land use and land use nange	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
ontribution to ozone depletion	kg CFC-11 eq	1.17E-06	0*	0*	0*	0*	0*	1.17E-06	0*
ontribution to acidification	mol H+ eq	1.54E+00	0*	0*	0*	0*	0*	1.54E+00	0*
ntribution to eutrophication, freshwater	kg (PO4)³⁻ eq	4.34E-05	0*	0*	0*	0*	0*	4.34E-05	0*
tribution to eutrophication marine	kg N eq	1.65E-01	0*	0*	0*	0*	0*	1.65E-01	0*
tribution to eutrophication, terrestrial	mol N eq	1.86E+00	0*	0*	0*	0*	0*	1.86E+00	0*
tribution to photochemical ozone formation - human Ith	kg COVNM eq	5.50E-01	0*	0*	0*	0*	0*	5.50E-01	0*
ntribution to resource use, minerals and metals	kg Sb eq	2.64E-06	0*	0*	0*	0*	0*	2.64E-06	0*
ntribution to resource use, fossils	MJ	3.33E+03	0*	0*	0*	0*	0*	3.33E+03	0*
ntribution to water use	m3 eq	9.07E+00	0*	0*	0*	0*	0*	9.07E+00	0*

Inventory flows Indicators				TeSys Giga	electronic	thermal	overlo	ad relay - L	.R9G225
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
ontribution to use of renewable primary energy excluding newable primary energy used as raw material	MJ	3.52E+02	0*	0*	0*	0*	0*	3.52E+02	0*
ontribution to use of renewable primary energy resources ed as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
tribution to total use of renewable primary energy purces	MJ	3.52E+02	0*	0*	0*	0*	0*	3.52E+02	0*
ribution to use of non renewable primary energy ding non renewable primary energy used as raw rial	MJ	3.33E+03	0*	0*	0*	0*	0*	3.33E+03	0*
ribution to use of non renewable primary energy urces used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
tribution to total use of non-renewable primary energy purces	MJ	3.33E+03	0*	0*	0*	0*	0*	3.33E+03	0*
bution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
bution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
bution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
ribution to net use of freshwater	m³	2.11E-01	0*	0*	0*	0*	0*	2.11E-01	0*
ibution to hazardous waste disposed	kg	6.25E+00	0*	0*	0*	0*	0*	6.25E+00	0*
ibution to non hazardous waste disposed	kg	3.58E+01	0*	0*	0*	0*	0*	3.58E+01	0*
ibution to radioactive waste disposed	kg	1.47E-03	0*	0*	0*	0*	0*	1.47E-03	0*
bution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
oution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
bution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
ibution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.1, database version 2023-02 in compliance with ISO14044, EF 3.0 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration numbe	er :	ENVPEP2105014_V2	Drafting rules	PCR-4-ed4-EN-2021 09 06						
			Supplemented by	PSR-0005-ed3.1-EN-2023 12 08						
			Information and							
Date of issue		07-2024	reference	www.pep-ecopassport.org						
			documents							
			Validity period	5 years						
Independent verifica	ation of the c	leclaration and data, in compliance with ISO 14021 : 2016								
Internal	Internal X External									
The PCR review wa	as conducted	by a panel of experts chaired by Julie Orgelet (DDemain)								
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022										
The components of the present PEP may not be compared with components from any other program.										
Document complies	Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"									

Schneider Electric Industries SAS

Country Customer Care Center http://www.se.com/contact 35, rue Joseph Monier CS 30323 F- 92500 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 928 298 512 €

www.se.com

ENVPEP2105014_V2

Published by Schneider Electric ©2024 - Schneider Electric – All rights reserved