Product Environmental Profile

Standard auxiliary contact, ComPact NSXm, circuit breaker status OF/SD, 1 changeover contact type










General information

Reference product	Standard auxiliary contact, ComPact NSXm, circuit breaker status OF/SD, 1 changeover contact type - LV426950
Description of the product	This single standard auxiliary contact provides two remote pieces of information about the circuit breaker status. It is utilized in Compact NSXm and PowerPact B devices. The OF contact indicates the position of the circuit breaker main contacts (open/closed), while the SD contact shows if the circuit breaker has tripped. There is one model for OF and SD information, depending on where it is fitted. This auxiliary contact is a common point changeover type with 1 normally open and 1 normally closed contact.
Description of the range	Single product
Functional unit	Other switchgear and controlgear solutions mentioned in the scope (e.g. fuses TC32, all-or-nothing relays TC94, Measuring relays and protection equipment TC95), apply the general rules of PCR and mention in the accompanying report the functional unit, the reference product characteristics, the reference lifetime and the use scenario which are applied consistently with the relevant IEC technical standards.
Specifications are:	Ue = Rated operating voltage (V) - 690V AC & 250V DC In = Rated current (A) - 5A Maximum Np = Number of poles / number of protected poles- Not applicable as it is auxiliary contact Icu: Rated breaking capacity (A)- Not applicable Voltage range- 24V-690V AC & 24V-250V DC Current type- AC & DC Standards - IEC 60947-5-1



Constituent materials

Reference product mass 25 g including the product, its packaging, additional elements and accessories

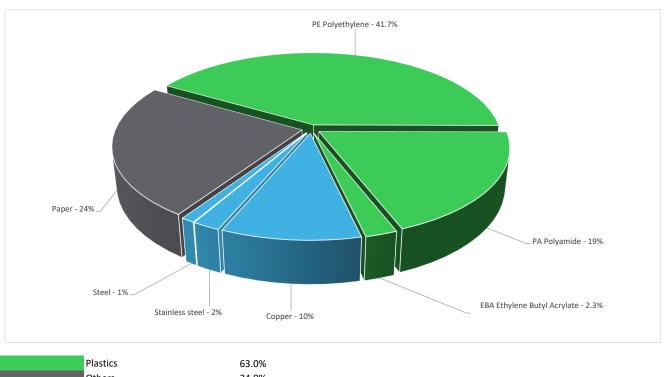

 Plastics
 63.0%

 Others
 24.0%

 Metals
 13.0%

Substance assessment

 $\label{lem:decomposition} \mbox{Details of ROHS and REACH substances information are available on the Schneider-Electric website $$ $$ \underline{\mbox{https://www.se.com}}$$$



(19) Additional environmental information

End Of Life

Recyclability potential:

40%

The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Environmental impacts

Reference service life time	20 years									
Product category	Other equipments - Passive product - continuous operation									
Life cycle of the product	The manufacturing, the distribution, the installation	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study								
Electricity consumtion	The electricity consumed during manufacturing p generates a negligable consumption	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligable consumption								
Installation elements		The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).								
Use scenario	load rate / rated current (In): 30 % of In percentage of utilization time: 100%									
Time representativeness	The collected data are representative of the year	The collected data are representative of the year 2024								
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and Representative of the actual type of technologies used to make the product.									
Geographical representativeness	Europe									
	[A1 - A3]	[A5]	[B6]	[C1 - C4]						
Energy model used	Electricity Mix; Low voltage; 2020; France, FR	Electricity Mix; Low voltage; 2020; Europe, EU-27	Electricity Mix; Low voltage; 2020; Europe, EU-27	Electricity Mix; Low voltage; 2020; Europe, EU-27						

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.se.com/contact

Mandatory Indicators		Standard a	uxiliary contact,	ComPact NSXn	n, circuit breake LV426950	er status OF/SD, 1	changeover con	tact type -
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	1.53E+00	8.99E-02	4.86E-03	2.27E-02	1.39E+00	1.91E-02	-1.59E-02
Contribution to climate change-fossil	kg CO2 eq	1.53E+00	9.98E-02	4.86E-03	2.24E-02	1.39E+00	1.86E-02	-2.19E-02
Contribution to climate change-biogenic	kg CO2 eq	-6.60E-03	-9.96E-03	0*	0*	0*	0*	6.04E-03
Contribution to climate change-land use and land use change	ge kg CO2 eq	9.45E-09	1.23E-09	0*	0*	0*	8.21E-09	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	1.63E-08	9.13E-09	7.46E-12	1.22E-10	6.73E-09	2.67E-10	-3.09E-09
Contribution to acidification	mol H+ eq	8.07E-03	8.09E-04	3.08E-05	3.60E-05	7.12E-03	7.41E-05	-4.64E-04
Contribution to eutrophication, freshwater	kg (PO4)³¯ eq	2.42E-05	4.81E-06	0*	2.33E-07	3.66E-06	1.55E-05	-3.99E-07
Contribution to eutrophication marine	kg N eq	9.96E-04	9.22E-05	1.44E-05	1.13E-05	8.67E-04	1.13E-05	-2.25E-05
Contribution to eutrophication, terrestrial	mol N eq	1.53E-02	1.01E-03	1.59E-04	9.83E-05	1.39E-02	1.44E-04	-2.26E-04
Contribution to photochemical ozone formation - human health	kg COVNM eq	3.19E-03	3.63E-04	4.00E-05	2.20E-05	2.73E-03	3.56E-05	-1.07E-04
Contribution to resource use, minerals and metals	kg Sb eq	5.53E-06	4.54E-06	0*	0*	4.92E-07	5.03E-07	-4.09E-06
Contribution to resource use, fossils	MJ	3.78E+01	2.27E+00	6.79E-02	1.24E-01	3.51E+01	2.25E-01	-5.77E-01
Contribution to water use	m3 eq	2.40E-01	1.17E-01	0*	1.87E-03	1.06E-01	1.49E-02	-3.30E-02

Inventory flows Indicators		Standard a	uxiliary contact,	ComPact NSXm	i, circuit breake LV426950	r status OF/SD, 1	changeover con	tact type -
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	9.36E+00	5.23E-02	0*	1.78E-02	9.28E+00	1.21E-02	6.41E-03
Contribution to use of renewable primary energy resources used as raw material	MJ	1.08E-01	1.08E-01	0*	0*	0*	0*	-8.86E-02
Contribution to total use of renewable primary energy resources	MJ	9.47E+00	1.61E-01	0*	1.78E-02	9.28E+00	1.21E-02	-8.21E-02
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.70E+01	1.54E+00	6.79E-02	1.24E-01	3.51E+01	2.25E-01	-3.68E-01
Contribution to use of non renewable primary energy resources used as raw material	MJ	7.33E-01	7.33E-01	0*	0*	0*	0*	-2.10E-01
Contribution to total use of non-renewable primary energy resources	MJ	3.78E+01	2.27E+00	6.79E-02	1.24E-01	3.51E+01	2.25E-01	-5.77E-01
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	5.61E-03	2.72E-03	0*	4.36E-05	2.50E-03	3.47E-04	-7.69E-04
Contribution to hazardous waste disposed	kg	4.65E-01	4.04E-01	0*	1.97E-04	6.09E-02	0*	-3.65E-01
Contribution to non hazardous waste disposed	kg	2.58E-01	7.88E-03	1.71E-04	1.06E-02	2.35E-01	5.14E-03	-6.30E-03
Contribution to radioactive waste disposed	kg	5.89E-05	3.88E-06	1.22E-07	8.86E-07	5.38E-05	2.08E-07	-3.10E-06
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	7.99E-03	4.05E-04	0*	4.46E-03	0*	3.12E-03	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	2.97E-04	4.44E-06	0*	2.62E-04	0*	3.08E-05	0.00E+00

^{*} represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product \$kg\$ of C 0.00E+00 \$Contribution to biogenic carbon content of the associated packaging \$kg\$ of C 2.27E-03

^{*}The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

	Standard au	ıxiliary c	ontact, ComF	act NSXm			status OF/SD,	1 changeover contact type -
Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
kg CO2 eq	1.39E+00	0*	0*	0*	0*	0*	1.39E+00	0*
kg CO2 eq	1.39E+00	0*	0*	0*	0*	0*	1.39E+00	0*
kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
kg CFC-11 eq	6.73E-09	0*	0*	0*	0*	0*	6.73E-09	0*
mol H+ eq	7.12E-03	0*	0*	0*	0*	0*	7.12E-03	0*
kg (PO4)³- eq	3.66E-06	0*	0*	0*	0*	0*	3.66E-06	0*
kg N eq	8.67E-04	0*	0*	0*	0*	0*	8.67E-04	0*
mol N eq	1.39E-02	0*	0*	0*	0*	0*	1.39E-02	0*
kg COVNM eq	2.73E-03	0*	0*	0*	0*	0*	2.73E-03	0*
kg Sb eq	4.92E-07	0*	0*	0*	0*	0*	4.92E-07	0*
MJ	3.51E+01	0*	0*	0*	0*	0*	3.51E+01	0*
m3 eq	1.06E-01	0*	0*	0*	0*	0*	1.06E-01	0*
	kg CO2 eq kg CO2 eq kg CO2 eq kg CO2 eq kg CFC-11 eq mol H+ eq kg (PO4)³ eq kg N eq mol N eq kg COVNM eq kg Sb eq MJ	Unit [B1 - B7] - Use	Unit [B1 - B7] - Use [B1] kg CO2 eq 1.39E+00 0* kg CO2 eq 1.39E+00 0* kg CO2 eq 0* 0* kg CO2 eq 0* 0* kg CFC-11 eq 6.73E-09 0* mol H+ eq 7.12E-03 0* kg (PO4)³ eq 3.66E-06 0* kg N eq 8.67E-04 0* mol N eq 1.39E-02 0* kg COVNM eq 2.73E-03 0* kg Sb eq 4.92E-07 0* MJ 3.51E+01 0*	Unit [B1 - B7] - Use [B1] [B2] kg CO2 eq 1.39E+00 0* 0* kg CO2 eq 1.39E+00 0* 0* kg CO2 eq 0* 0* 0* kg CO2 eq 0* 0* 0* kg CFC-11 6.73E-09 0* 0* mol H+ eq 7.12E-03 0* 0* kg N eq 8.67E-04 0* 0* kg N eq 1.39E-02 0* 0* kg COVNM eq 2.73E-03 0* 0* kg Sb eq 4.92E-07 0* 0* MJ 3.51E+01 0* 0*	Unit [B1 - B7] - Use [B1] [B2] [B3] kg CO2 eq 1.39E+00 0* 0* 0* kg CO2 eq 1.39E+00 0* 0* 0* kg CO2 eq 0* 0* 0* 0* kg CO2 eq 0* 0* 0* 0* kg CFC-11 eq 6.73E-09 0* 0* 0* mol H+ eq 7.12E-03 0* 0* 0* kg N eq 3.66E-06 0* 0* 0* kg N eq 8.67E-04 0* 0* 0* mol N eq 1.39E-02 0* 0* 0* kg COVNM eq 2.73E-03 0* 0* 0* kg Sb eq 4.92E-07 0* 0* 0*	LV42 Unit [B1 - B7] - Use [B1] [B2] [B3] [B4]	LV426950	Unit [B1 - B7] - Use [B1] [B2] [B3] [B4] [B5] [B6] kg CO2 eq 1.39E+00 0° 0° 0° 0° 0° 1.39E+00 kg CO2 eq 1.39E+00 0°

	Standard au	ıxiliary c	ontact, ComF	Pact NSXm			status OF/SD,	1 changeover contact type
Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
MJ	9.28E+00	0*	0*	0*	0*	0*	9.28E+00	0*
MJ	0*	0*	0*	0*	0*	0*	0*	0*
MJ	9.28E+00	0*	0*	0*	0*	0*	9.28E+00	0*
MJ	3.51E+01	0*	0*	0*	0*	0*	3.51E+01	0*
MJ	0*	0*	0*	0*	0*	0*	0*	0*
MJ	3.51E+01	0*	0*	0*	0*	0*	3.51E+01	0*
kg	0*	0*	0*	0*	0*	0*	0*	0*
MJ	0*	0*	0*	0*	0*	0*	0*	0*
MJ	0*	0*	0*	0*	0*	0*	0*	0*
m³	2.50E-03	0*	0*	0*	0*	0*	2.50E-03	0*
kg	6.09E-02	0*	0*	0*	0*	0*	6.09E-02	0*
kg	2.35E-01	0*	0*	0*	0*	0*	2.35E-01	0*
kg	5.38E-05	0*	0*	0*	0*	0*	5.38E-05	0*
kg	0*	0*	0*	0*	0*	0*	0*	0*
kg	0*	0*	0*	0*	0*	0*	0*	0*
kg	0*	0*	0*	0*	0*	0*	0*	0*
MJ	0*	0*	0*	0*	0*	0*	0*	0*
	MJ MJ MJ MJ MJ MJ kg MJ MJ kg kg kg kg kg kg	Unit [B1 - B7] - Use MJ 9.28E+00 MJ 9.28E+00 MJ 3.51E+01 MJ 0* MJ 0* MJ 0* MJ 0* MJ 0* m³ 2.50E-03 kg 6.09E-02 kg 5.38E-01 kg 5.38E-05 kg 0* kg 0* kg 0* kg 0* kg 0* kg 0*	Unit [B1 - B7] - Use [B1] MJ 9.28E+00 0* MJ 9.28E+00 0* MJ 9.28E+00 0* MJ 3.51E+01 0* MJ 0* 0* kg 6.09E-03 0* kg 6.09E-02 0* kg 5.38E-01 0* kg 0* 0* kg 0 0* kg 0 0*	Unit [B1 - B7] - Use [B1] [B2] MJ 9.28E+00 0* 0* MJ 9.28E+00 0* 0* MJ 9.28E+00 0* 0* MJ 3.51E+01 0* 0* MJ 0* 0* 0* kg 0* 0* 0* MJ 0* 0* 0* m³ 2.50E-03 0* 0* kg 6.09E-02 0* 0* kg 5.38E-05 0* 0* kg 0* 0* 0*	Unit [B1 - B7] - Use [B1] [B2] [B3] MJ 9.28E+00 0° 0° 0° MJ 9.28E+00 0° 0° 0° MJ 9.28E+01 0° 0° 0° MJ 0° 0° 0° 0° MJ 0° 0° 0° 0° kg 0° 0° 0° 0° MJ 0° 0° 0° 0° kg 6.09E-02 0° 0° 0° kg 5.38E-05 0° 0° 0° kg 0° 0° 0° 0° kg 0° 0° 0° 0° kg 0° 0° 0°	MJ 9.28E+00 0° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0	Unit [B1 - B7] - Use [B1] [B2] [B3] [B4] [B5] MJ 9.28E+00 0* 0* 0* 0* 0* 0* MJ 9.28E+00 0* 0* 0* 0* 0* 0* MJ 9.28E+00 0* 0* 0* 0* 0* 0* MJ 3.51E+01 0* 0* 0* 0* 0* 0* MJ 0* 0* 0* 0* 0* 0* 0* kg 0* 0* 0* 0* 0* 0* 0* MJ 0* <td>Unit [B1 - B7] - Use [B1] [B2] [B3] [B4] [B5] [B6] MJ 9.28E+00 0° 0° 0° 0° 0° 0° 0° MJ 9.28E+00 0° 0° 0° 0° 0° 0° 9.28E+00 MJ 9.28E+00 0° 0° 0° 0° 0° 9.28E+00 MJ 3.51E+01 0° 0° 0° 0° 0° 9.28E+00 MJ 0° 0° 0° 0° 0° 0° 9.28E+00 MJ 0° 0° 0° 0° 0° 0° 0° 0° MJ 0°</td>	Unit [B1 - B7] - Use [B1] [B2] [B3] [B4] [B5] [B6] MJ 9.28E+00 0° 0° 0° 0° 0° 0° 0° MJ 9.28E+00 0° 0° 0° 0° 0° 0° 9.28E+00 MJ 9.28E+00 0° 0° 0° 0° 0° 9.28E+00 MJ 3.51E+01 0° 0° 0° 0° 0° 9.28E+00 MJ 0° 0° 0° 0° 0° 0° 9.28E+00 MJ 0° 0° 0° 0° 0° 0° 0° 0° MJ 0°

 $^{^{\}star}$ represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2.2, database version 2024-01 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number:	SCHN-01323-V01.01-EN	Drafting rules	PCR-4-ed4-EN-2021 09 06					
		Supplemented by	PSR-0005-ed3.1-EN-2023 12 08					
Verifier accreditation N°	VH45	Information and reference documents	www.pep-ecopassport.org					
Date of issue	11-2024	Validity period	5 years					
Independent verification of the	25 : 2006							
Internal	External X							
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)								
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022								
The components of the pres	PASS							
Document complies with ISO 14025:2006 "Environmental labels and declarations. Type III environmental declarations"								

Schneider Electric Industries SAS
Country Customer Care Center
http://www.se.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

SCHN-01323-V01.01-EN

Published by Schneider Electric

©2024 - Schneider Electric - All rights reserved

11-2024