


Product Environmental Profile

BSCM

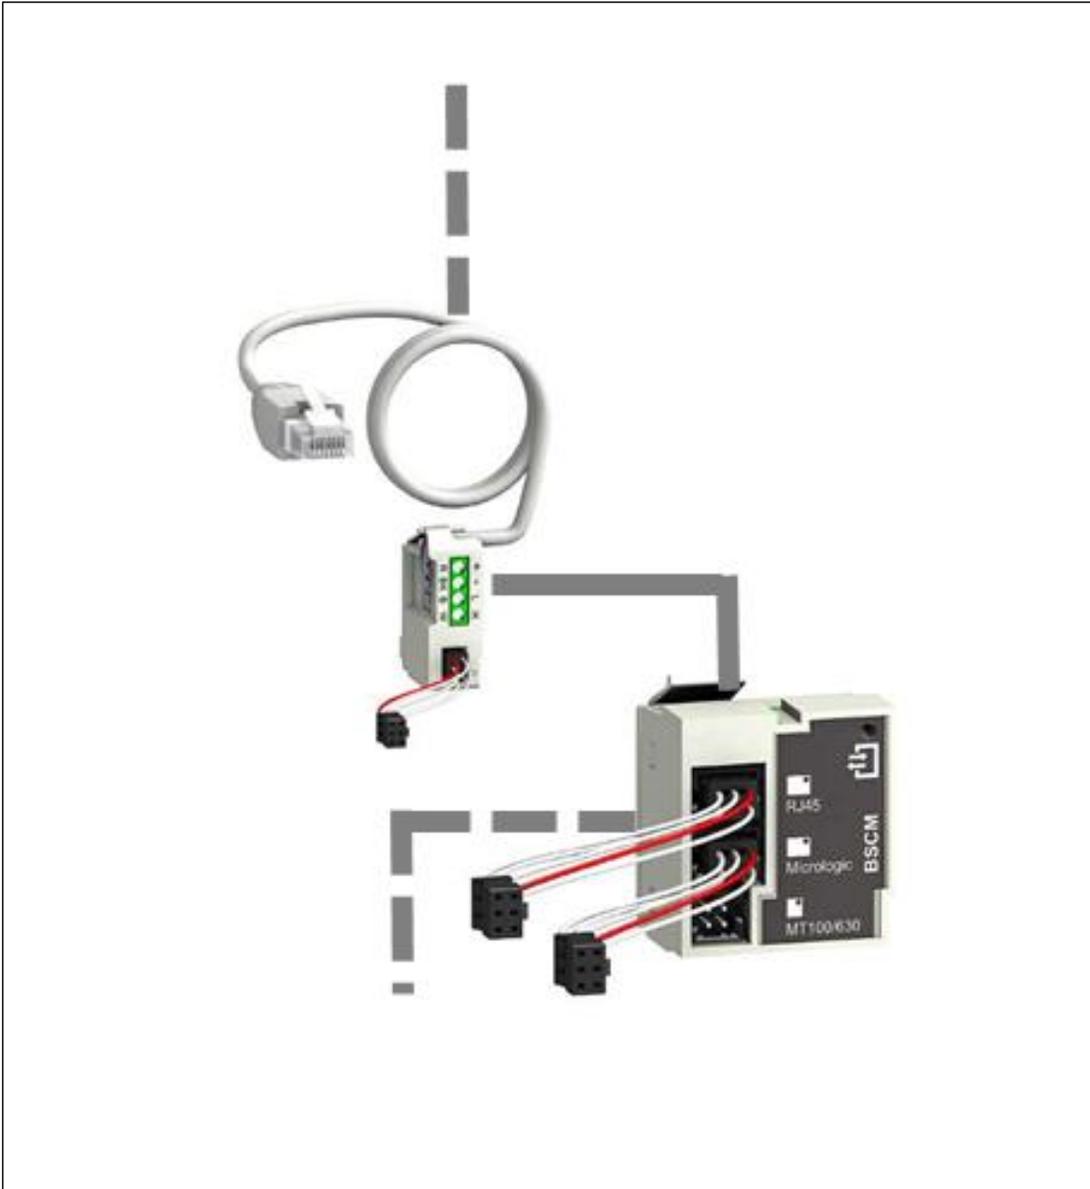


General information

Reference product	BSCM - LV434205, LV434201
Description of the product	BSCM for ComPacT NSX is used to acquire device status indications and control the communicating remote-control function and it serves as a converter between the analog outputs of the device indication contacts (O/F, SD, SDE) and the digital communicating functions. It is needed for communication of status indications, controls and measurements. The BSCM is installed inside the circuit breaker behind the front cover. It is connected to external Ethernet or Modbus interfaces (IFE/IFM) via the NSX cord terminal block. The product used for the analysis is BSCM ULP (ref. LV434205) and NSX cord L=1.3m (Ref - LV434201)
Functional unit	Enerlin'X is used to acquire device status indications and control the communicating remote-control function, also a memory used to manage the maintenance, and NSX cord is to connect ComPacT NSX to the ULP devices (FDM121 display, IFM, IFE or I/O) unit for 10 years.
Accessories	ComPacT NSX is connected to the ULP devices (FDM121 display, IFM, IFE or I/O) unit via the NSX cord. Cord available in three lengths: 0.35 m (LV434200), 1.3 m(LV434201) and 3 m (LV434202).

Constituent materials

Reference product mass	87.4 g including the product, its packaging and additional elements and accessories
------------------------	---

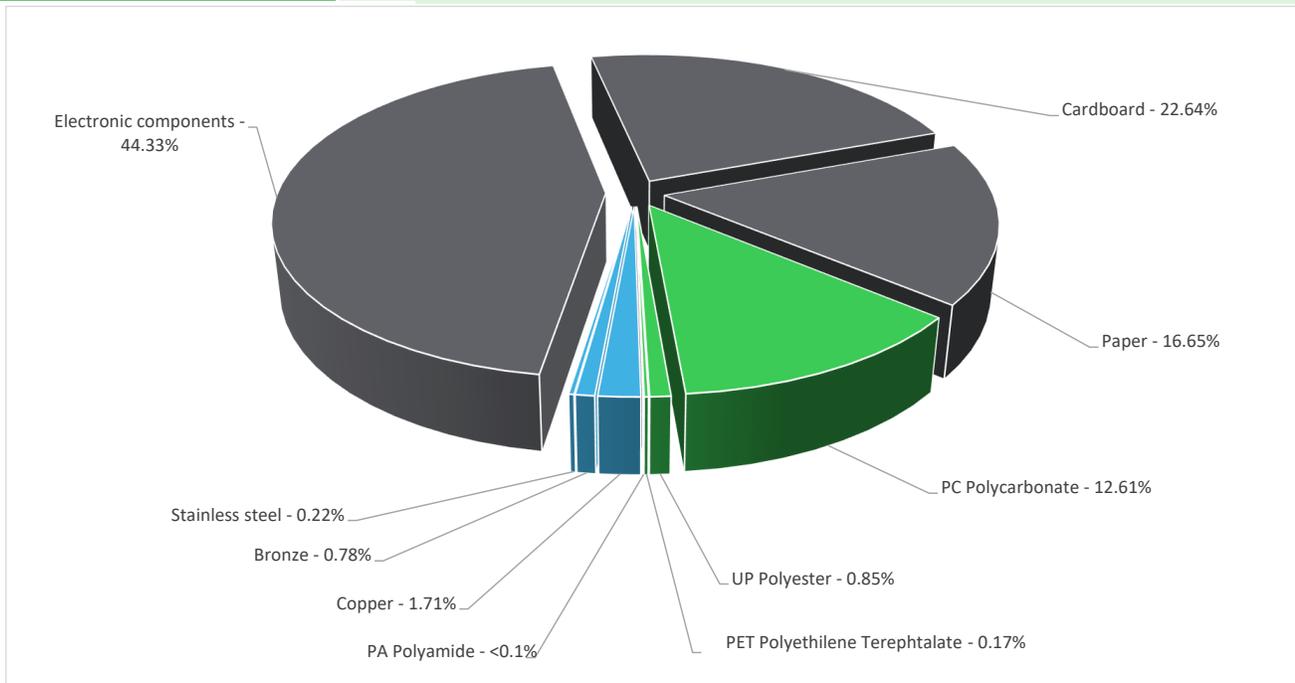

Plastics	13.7%
Metals	2.7%
Others	83.6%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website
<https://www.se.com/ww/en/work/support/green-premium/>

Additional environmental information

End Of Life	Recyclability potential:	4%	Recyclability rate has been calculated based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	----	--


Environmental impacts

Reference service life time	10 years		
Product category	Other equipments - Active product		
Installation elements	No special components needed		
Use scenario	The product BSCM is in active mode 100% of load rate with a power use of 0.48W for lifetime of 10 years		
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.		
Geographical representativeness	Europe		
Energy model used	[A1 - A3]	[A5]	[B6]
	Electricity Mix; Production mix; Low voltage; FR	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27
			[C1 - C4]
			Electricity Mix; Production mix; Low voltage; UE-27

Detailed results, including all the optional indicators mentioned in PCRred4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators			BSCM - LV434205, LV434201					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	1.96E+01	2.18E+00	1.14E-02	6.35E-02	1.72E+01	9.14E-02	-1.67E-02
Contribution to climate change-fossil	kg CO2 eq	1.95E+01	2.17E+00	1.14E-02	6.07E-02	1.72E+01	8.73E-02	-2.64E-02
Contribution to climate change-biogenic	kg CO2 eq	3.38E-02	3.96E-03	0*	2.82E-03	2.30E-02	4.04E-03	9.73E-03
Contribution to climate change-land use and land use change	kg CO2 eq	8.36E-09	3.21E-09	0*	0*	0*	5.15E-09	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	4.12E-07	3.29E-07	0*	4.21E-09	7.37E-08	4.97E-09	2.02E-10
Contribution to acidification	mol H+ eq	1.14E-01	1.33E-02	7.35E-05	2.52E-04	9.83E-02	1.93E-03	-3.21E-04
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	6.74E-05	7.51E-06	0*	4.59E-07	4.72E-05	1.23E-05	-2.86E-07
Contribution to eutrophication marine	kg N eq	1.42E-02	1.60E-03	3.45E-05	6.68E-05	1.12E-02	1.37E-03	-3.24E-05
Contribution to eutrophication, terrestrial	mol N eq	1.86E-01	1.70E-02	3.79E-04	5.04E-04	1.68E-01	6.70E-04	-2.09E-04
Contribution to photochemical ozone formation - human health	kg COVNM eq	4.19E-02	5.53E-03	9.57E-05	1.35E-04	3.59E-02	2.70E-04	-5.35E-05
Contribution to resource use, minerals and metals	kg Sb eq	8.29E-04	8.28E-04	0*	0*	1.25E-06	3.10E-07	-2.68E-06
Contribution to resource use, fossils	MJ	4.69E+02	2.78E+01	1.59E-01	6.61E-01	4.39E+02	9.29E-01	2.73E-02
Contribution to water use	m3 eq	2.60E+01	9.73E-01	0*	2.71E-02	6.10E-01	2.44E+01	-1.45E-02

Additional indicators for the French regulation are available as well

Inventory flows Indicators			BSCM - LV434205, LV434201					
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	8.52E+01	7.70E-01	0*	4.75E-02	8.43E+01	1.13E-01	2.25E-01
Contribution to use of renewable primary energy resources used as raw material	MJ	1.20E-01	1.20E-01	0*	0*	0*	0*	-1.38E-01
Contribution to total use of renewable primary energy resources	MJ	8.54E+01	8.90E-01	0*	4.75E-02	8.43E+01	1.13E-01	8.64E-02
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4.67E+02	2.65E+01	1.59E-01	6.61E-01	4.39E+02	9.29E-01	2.73E-02
Contribution to use of non renewable primary energy resources used as raw material	MJ	1.28E+00	1.28E+00	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	4.69E+02	2.78E+01	1.59E-01	6.61E-01	4.39E+02	9.29E-01	2.73E-02
Contribution to use of secondary material	kg	3.19E-02	3.19E-02	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	6.76E-01	2.27E-02	0*	6.32E-04	1.42E-02	6.39E-01	-3.38E-04
Contribution to hazardous waste disposed	kg	1.01E+01	9.68E+00	0*	0*	3.22E-01	5.42E-02	-2.23E-01
Contribution to non hazardous waste disposed	kg	3.42E+00	7.20E-01	4.01E-04	2.07E-01	2.48E+00	1.24E-02	-5.43E-01
Contribution to radioactive waste disposed	kg	2.28E-03	1.74E-03	2.85E-07	2.77E-05	5.19E-04	7.74E-07	-2.65E-05
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	3.73E-02	0*	0*	3.49E-02	0*	2.35E-03	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCR_{ed4}, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

The Use stage is the greatest contributor due to the energy losses occurring throughout the product reference service lifetime except the Climate change-Land use and land use change (GWPlu), Ozone depletion (ODP), Resource use, minerals and metals (ADPe) and Water use (WU) stages. The manufacturing stage is the main contributor on Ozone depletion (ODP) and Resource use, minerals and metals (ADPe) stages. The End Of Life stage is the main contributor on Climate change-Land use and land use change (GWPlu) and Water use (WU) stages.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00994-V01.01-EN	Drafting rules	PEP-PCR-ed4-2021 09 06
Verifier accreditation N°	VH08	Supplemented by	PSR-0005-ed2-2016 03 29
Date of issue	11/2023	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			



Schneider Electric Industries SAS
Country Customer Care Center
<http://www.se.com/contact>
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €
www.se.com

Published by Schneider Electric

SCHN-00994-V01.01-EN

©2023 - Schneider Electric – All rights reserved

11-2023