

# Product Environmental Profile


PrismaSeT G WALL MOUNTED ENCLOSURE Up to 630A – IP30





## General information

Reference product	PrismaSeT G WALL MOUNTED ENCLOSURE Up to 630A – IP30 - PrismaSeT G 250A
Product Configuration	The product used for the analysis is the typical PrismaSeT G 250A product, which is comprised of the following commercial references: LVS03001, LVS03030, LVS03204, LVS03221, LVS03232, LVS03801, LVS03802, LVS04014, LVS04021, LVS04060, LVS04066, LVS04112, LVS04200, LVS04239, LVS04257, LVS04265, LVS04267, LVS08108, LVS08128.
Description of the product	The PrismaSeT G is an assembled enclosures with busbars. It is designed to integrate and allow the installation of electric devices such as Circuit breakers (MCCB & MCB), Switch disconnectors, Fuse, Busbars for connection as per the customer requirement for a maximum current value of up to 630A.
Description of the range	Single product
Functional unit	To protect persons during 20 years against direct contact with live parts and allow monitoring, control and protection devices in a single enclosure or a cabinet having the following dimensions 1230 x 600 x 250 mm. Continuous current pass through the busbars for the devices to be connected. It can withstand mechanical impacts (IK08 - IEC62262) and the penetration of solid objects and liquids (IP30 - IEC 60529) in accordance with the Electrical distribution switchboard solutions, IEC 61439-1 and 2 standards.
Specifications are:	Metal enclosures: steel metal sheet with electrophoresis treatment and hot-polymerized polyester epoxy powder coating Color: white RAL 9001 Degree of protection IP30 to IP4X and IP55 Degree of protection against mechanical impacts: from IK07 to IK10

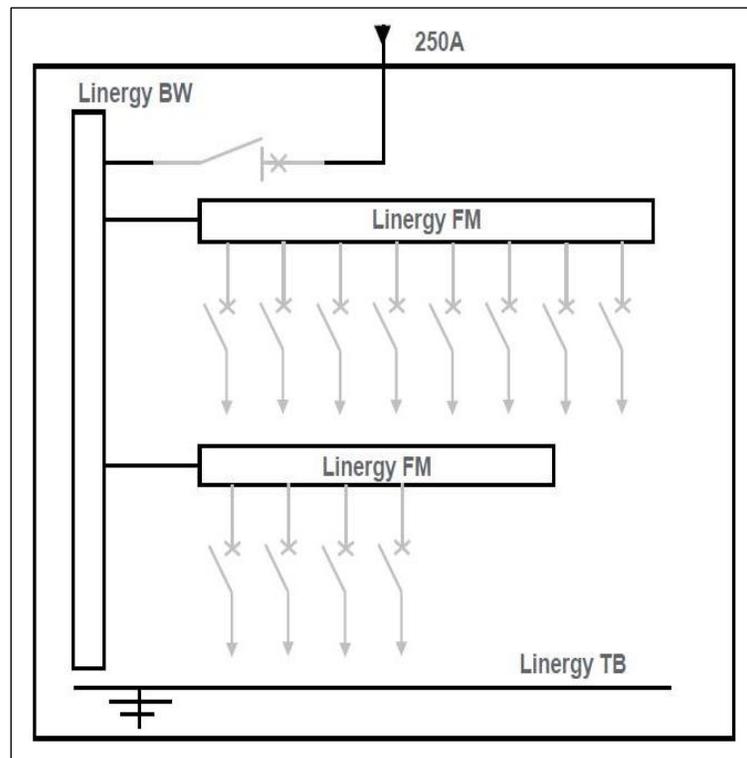


Note: Circuit Breakers are not included in the Analysis



## Constituent materials

Reference product mass

48572 g including the product, its packaging and additional elements and accessories

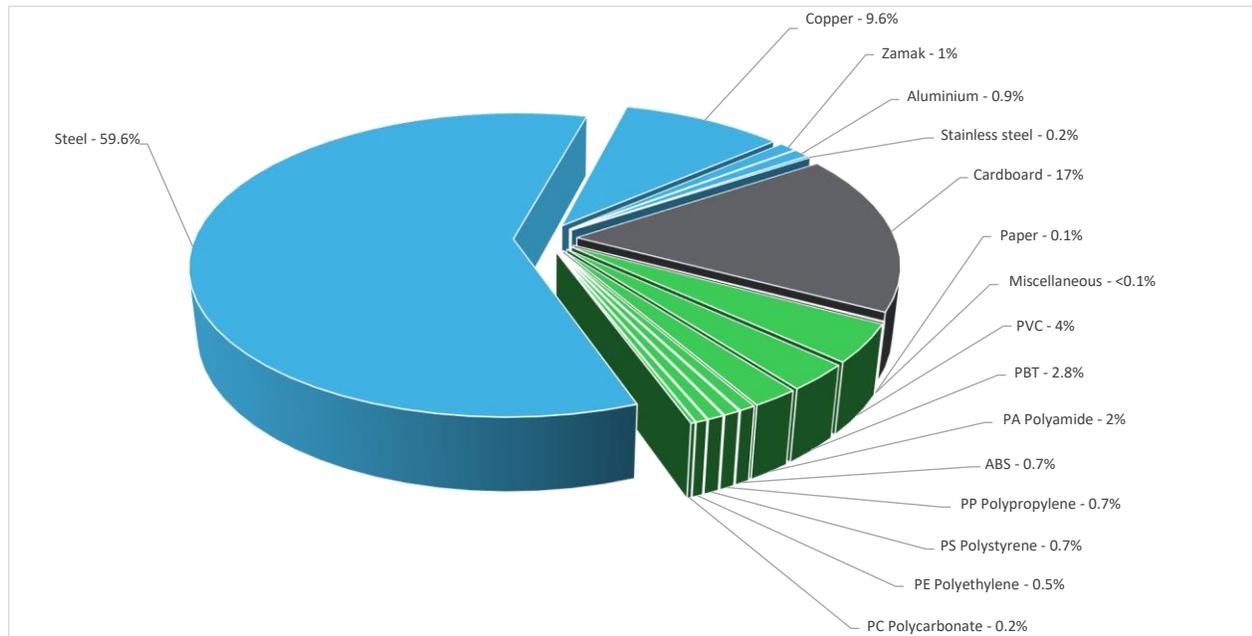

Plastics	11.6%
Metals	71.3%
Others	17.1%



## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<https://www.se.com/ww/en/work/support/green-premium/>



## Additional environmental information

End Of Life	Recyclability potential:	<b>89%</b>	The recyclability rate was calculated from the recycling rates of each material making up the product with the exception of data using the ESR database. For materials or components using the ESR database or the absence of data the conservative hypothesis "0% recyclability" was used.
-------------	--------------------------	------------	---



## Environmental impacts

Reference service life time	20 years			
Product category	Other equipments - Passive product - continuous operation			
Installation elements	The product does not require special installation operation.			
Use scenario	As Per PSR @ Load rate 30% and RLT 100%, The power dissipated by the PrismaSeT G Wall Mounted Enclosure 24 Modules is 39.2 W for 20 years.			
Time representativeness	The collected data are representative of the year 2023			
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and representative of the actual type of technologies used to make the product.			
Geographical representativeness	Europe			
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Low voltage; 2018; France, FR	Electricity Mix; Low voltage; 2018; Europe, EU-27	Electricity Mix; Low voltage; 2018; Europe, EU-27	Electricity Mix; Low voltage; 2018; Europe, EU-27

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		PrismaSeT G WALL MOUNTED ENCLOSURE Up to 630A – IP30 - PrismaSeT G 250A						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	6.33E+02	2.55E+02	9.47E+00	9.11E+00	2.53E+02	1.07E+02	-1.40E+02
Contribution to climate change-fossil	kg CO2 eq	6.29E+02	2.53E+02	9.47E+00	8.69E+00	2.53E+02	1.06E+02	-1.38E+02
Contribution to climate change-biogenic	kg CO2 eq	3.96E+00	2.25E+00	0*	4.21E-01	3.38E-01	9.57E-01	-2.37E+00
Contribution to climate change-land use and land use change	kg CO2 eq	1.22E-04	9.63E-05	0*	0*	0*	2.54E-05	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	1.18E-05	9.85E-06	1.45E-08	1.18E-07	1.08E-06	6.94E-07	-2.13E-05
Contribution to acidification	mol H+ eq	3.82E+00	1.85E+00	5.99E-02	2.61E-02	1.45E+00	4.35E-01	-1.53E+00
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	3.62E-02	5.22E-03	0*	2.06E-04	6.94E-04	3.01E-02	-3.49E-04
Contribution to eutrophication marine	kg N eq	5.16E-01	2.30E-01	2.81E-02	1.13E-02	1.64E-01	8.23E-02	-9.37E-02
Contribution to eutrophication, terrestrial	mol N eq	6.23E+00	2.44E+00	3.08E-01	7.89E-02	2.47E+00	9.34E-01	-1.05E+00
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.74E+00	8.22E-01	7.77E-02	1.81E-02	5.27E-01	2.94E-01	-3.94E-01
Contribution to resource use, minerals and metals	kg Sb eq	1.29E-01	1.28E-01	0*	0*	1.84E-05	9.57E-04	-4.13E-02
Contribution to resource use, fossils	MJ	2.35E+04	1.06E+04	1.32E+02	8.80E+01	6.45E+03	6.30E+03	-2.94E+03
Contribution to water use	m <sup>3</sup> eq	1.70E+02	1.00E+02	3.59E-02	8.61E-01	8.96E+00	5.99E+01	-8.69E+01
Inventory flows Indicators		PrismaSeT G WALL MOUNTED ENCLOSURE Up to 630A – IP30 - PrismaSeT G 250A						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.36E+03	8.73E+01	1.76E-01	1.16E+01	1.24E+03	2.38E+01	-1.52E+01
Contribution to use of renewable primary energy resources used as raw material	MJ	4.89E+01	4.89E+01	0*	0*	0*	0*	-1.23E+02
Contribution to total use of renewable primary energy resources	MJ	1.41E+03	1.36E+02	1.76E-01	1.16E+01	1.24E+03	2.38E+01	-1.38E+02
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.34E+04	1.04E+04	1.32E+02	8.80E+01	6.45E+03	6.30E+03	-2.93E+03
Contribution to use of non renewable primary energy resources used as raw material	MJ	1.67E+02	1.67E+02	0*	0*	0*	0*	-3.41E+00
Contribution to total use of non-renewable primary energy resources	MJ	2.35E+04	1.06E+04	1.32E+02	8.80E+01	6.45E+03	6.30E+03	-2.94E+03
Contribution to use of secondary material	kg	6.82E+00	6.82E+00	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m <sup>3</sup>	3.96E+00	2.33E+00	8.36E-04	2.01E-02	2.09E-01	1.39E+00	-2.02E+00
Contribution to hazardous waste disposed	kg	7.79E+02	7.74E+02	0*	2.21E-01	4.73E+00	0*	-3.34E+03
Contribution to non hazardous waste disposed	kg	1.88E+02	1.38E+02	3.32E-01	3.92E+00	3.65E+01	8.95E+00	-1.07E+02
Contribution to radioactive waste disposed	kg	1.08E-01	9.76E-02	2.36E-04	4.82E-04	7.63E-03	1.66E-03	-5.20E-02
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	4.09E+01	5.13E+00	0*	7.25E-02	0*	3.57E+01	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	7.76E-01	7.75E-02	0*	3.62E-01	0*	3.36E-01	0.00E+00
* represents less than 0.01% of the total life cycle of the reference flow								
Contribution to biogenic carbon content of the product	kg de C	0.00E+00						
Contribution to biogenic carbon content of the associated packaging	kg de C	2.33E+00						

Mandatory Indicators		PrismaSeT G WALL MOUNTED ENCLOSURE Up to 630A – IP30 - PrismaSeT G 250A								
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]	
Contribution to climate change	kg CO2 eq	2.53E+02	0*	0*	0*	0*	0*	2.53E+02	0*	
Contribution to climate change-fossil	kg CO2 eq	2.53E+02	0*	0*	0*	0*	0*	2.53E+02	0*	
Contribution to climate change-biogenic	kg CO2 eq	3.38E-01	0*	0*	0*	0*	0*	3.38E-01	0*	
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to ozone depletion	kg CFC-11 eq	1.08E-06	0*	0*	0*	0*	0*	1.08E-06	0*	
Contribution to acidification	mol H+ eq	1.45E+00	0*	0*	0*	0*	0*	1.45E+00	0*	
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	6.94E-04	0*	0*	0*	0*	0*	6.94E-04	0*	
Contribution to eutrophication marine	kg N eq	1.64E-01	0*	0*	0*	0*	0*	1.64E-01	0*	
Contribution to eutrophication, terrestrial	mol N eq	2.47E+00	0*	0*	0*	0*	0*	2.47E+00	0*	
Contribution to photochemical ozone formation - human health	kg COVNM eq	5.27E-01	0*	0*	0*	0*	0*	5.27E-01	0*	
Contribution to resource use, minerals and metals	kg Sb eq	1.84E-05	0*	0*	0*	0*	0*	1.84E-05	0*	
Contribution to resource use, fossils	MJ	6.45E+03	0*	0*	0*	0*	0*	6.45E+03	0*	
Contribution to water use	m3 eq	8.96E+00	0*	0*	0*	0*	0*	8.96E+00	0*	

Inventory flows Indicators		PrismaSeT G WALL MOUNTED ENCLOSURE Up to 630A – IP30 - PrismaSeT G 250A								
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]	
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.24E+03	0*	0*	0*	0*	0*	1.24E+03	0*	
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to total use of renewable primary energy resources	MJ	1.24E+03	0*	0*	0*	0*	0*	1.24E+03	0*	
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	6.45E+03	0*	0*	0*	0*	0*	6.45E+03	0*	
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to total use of non-renewable primary energy resources	MJ	6.45E+03	0*	0*	0*	0*	0*	6.45E+03	0*	
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to net use of freshwater	m³	2.09E-01	0*	0*	0*	0*	0*	2.09E-01	0*	
Contribution to hazardous waste disposed	kg	4.73E+00	0*	0*	0*	0*	0*	4.73E+00	0*	
Contribution to non hazardous waste disposed	kg	3.65E+01	0*	0*	0*	0*	0*	3.65E+01	0*	
Contribution to radioactive waste disposed	kg	7.63E-03	0*	0*	0*	0*	0*	7.63E-03	0*	
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*	

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2, database version 2024 in compliance with ISO14044, EF 3.0 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00691-V02.01-EN	Drafting rules	PCR-4-ed4-EN-2021 09 06
		Supplemented by	PSR-0005-ed3.1-EN-2023 12 08
Verifier accreditation N°	VH45	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
Date of issue	05/2024	Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2006			
Internal                      External    X			
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)			
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022			
The components of the present PEP may not be compared with components from any other program.			
Document complies with ISO 14025:2006 "Environmental labels and declarations. Type III environmental declarations"			



Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.se.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92500 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 928 298 512 €

[www.se.com](http://www.se.com)

SCHN-00691-V02.01-EN

Published by Schneider Electric

©2024 - Schneider Electric – All rights reserved

05/2024