Product Environmental Profile

Spacial SMX - Stainless steel







General information

Representative product

Spacial SMX - Stainless steel - NSYSMX18840

Description of the product

Spacial SMX - Stainless steel Enclosures protect the inside installed equipment against the external environment, where cleanliness is required or for highly corrosive environments and protect people against accidental contact with internal electrical devices.


Functional unit

Protect persons during 20 years against direct contact with live parts and allow grouping monitoring, control and protection devices in a single enclosure with dimensions 1800mm x 800mm x 400mm, while protecting against mechanical impacts (IK10 conforming to IEC 62262) and the penetration of solid objects and liquids (IP66 conforming to IEC 60529).

Constituent materials

Reference product mass

98000 g including the product, its packaging and additional elements and accessories

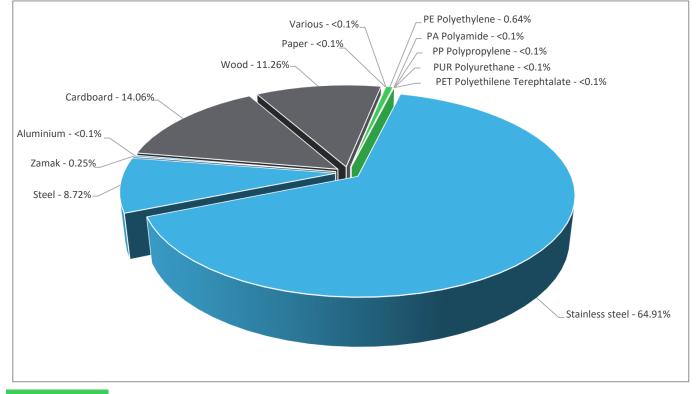

 Plastics
 0.72%

 Metals
 73.88%

 Others
 25.40%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate - BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page




| The Spacial SMX - Stainless steel presents the following relevent environmental aspects | | | | | | |
|---|---|--|--|--|--|--|
| Manufacturing | Manufactured at a Schneider Electric production site ISO14001 certified | | | | | |
| Distribution | Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 23999.7 g, consisting of Cardboard (55.19%), Wood (44.21%), Steel (0.43%), Paper (0.14%), PE film (0.03%) Product distribution optimised by setting up local distribution centres | | | | | |
| Installation | The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal). | | | | | |
| Use | The product does not require special maintenance operations. | | | | | |
| End of life | End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: 94% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). | | | | | |

Environmental impacts

| Reference life time | 20 years | | | | | | |
|------------------------------------|---|----------------|----------------|----------------|--|--|--|
| Product category | Unequipped enclosures and cabinets | | | | | | |
| Installation elements | No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation. | | | | | | |
| Use scenario | Non applicable for unequipped enclosures and cabinets | | | | | | |
| Geographical representativeness | Europe | | | | | | |
| Technological representativeness | The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are similar and representative of the actual type of technologies used to make the product in production. | | | | | | |
| | Manufacturing | Installation | Use | End of life | | | |
| Energy model used | Energy model used: Spain | Not Applicable | Not Applicable | Not Applicable | | | |

| Compulsory indicators | | Spacial SMX | - Stainless steel | - NSYSMX188 | 40 | | |
|--|-------------------------------------|-------------|-------------------|--------------|--------------|-----|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to mineral resources depletion | kg Sb eq | 8.32E-03 | 8.32E-03 | 0* | 0* | 0* | 0* |
| Contribution to the soil and water acidification | kg SO ₂ eq | 1.62E+00 | 1.53E+00 | 5.77E-02 | 8.82E-03 | 0* | 2.02E-02 |
| Contribution to water eutrophication | kg PO ₄ 3- eq | 1.57E-01 | 1.36E-01 | 1.33E-02 | 3.58E-03 | 0* | 4.74E-03 |
| Contribution to global warming | kg CO ₂ eq | 3.63E+02 | 3.32E+02 | 1.26E+01 | 1.20E+01 | 0* | 6.56E+00 |
| Contribution to ozone layer depletion | kg CFC11 eq | 1.03E-05 | 9.82E-06 | 2.56E-08 | 2.51E-08 | 0* | 4.18E-07 |
| Contribution to photochemical oxidation | kg C ₂ H ₄ eq | 1.07E-01 | 9.80E-02 | 4.12E-03 | 2.82E-03 | 0* | 2.18E-03 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Net use of freshwater | m3 | 2.79E+00 | 2.78E+00 | 1.13E-03 | 3.09E-03 | 0* | 8.00E-03 |
| Total Primary Energy | MJ | 3.98E+03 | 3.68E+03 | 1.79E+02 | 2.15E+01 | 0* | 1.02E+02 |

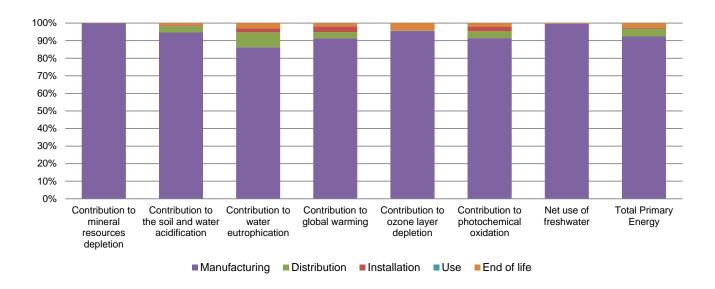

| Optional indicators | | Spacial SMX | - Stainless steel | - NSYSMX188 | 40 | | |
|---|------|-------------|-------------------|--------------|--------------|-----|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to fossil resources depletion | MJ | 2.66E+03 | 2.38E+03 | 1.78E+02 | 2.04E+01 | 0* | 8.16E+01 |
| Contribution to air pollution | m³ | 3.77E+04 | 3.61E+04 | 5.38E+02 | 2.94E+02 | 0* | 7.18E+02 |
| Contribution to water pollution | m³ | 1.88E+04 | 1.58E+04 | 2.08E+03 | 2.30E+02 | 0* | 7.67E+02 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Use of secondary material | kg | 5.28E+01 | 5.28E+01 | 0* | 0* | 0* | 0* |
| Total use of renewable primary energy resources | MJ | 3.59E+02 | 3.58E+02 | 2.38E-01 | 2.67E-01 | 0* | 1.14E-01 |
| Total use of non-renewable primary energy resources | MJ | 3.62E+03 | 3.32E+03 | 1.79E+02 | 2.13E+01 | 0* | 1.02E+02 |
| Use of renewable primary energy excluding renewable primary energy used as raw material | MJ | -1.28E+02 | -1.29E+02 | 0* | 0* | 0* | 0* |
| Use of renewable primary energy resources used as raw material | MJ | 4.87E+02 | 4.87E+02 | 0* | 0* | 0* | 0* |
| Use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ | 3.58E+03 | 3.28E+03 | 1.79E+02 | 2.13E+01 | 0* | 1.02E+02 |
| Use of non renewable primary energy resources used as raw material | MJ | 3.43E+01 | 3.43E+01 | 0* | 0* | 0* | 0* |
| Use of non renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Use of renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Waste categories | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Hazardous waste disposed | kg | 6.69E+02 | 5.95E+02 | 0* | 0* | 0* | 7.49E+01 |
| Non hazardous waste disposed | kg | 5.15E+02 | 5.05E+02 | 4.49E-01 | 8.64E+00 | 0* | 3.14E-01 |
| Radioactive waste disposed | kg | 3.29E-02 | 3.18E-02 | 3.20E-04 | 3.14E-04 | 0* | 4.81E-04 |
| Other environmental information | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Materials for recycling | kg | 9.07E+01 | 8.61E+00 | 0* | 1.63E+01 | 0* | 6.58E+01 |
| Components for reuse | kg | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Materials for energy recovery | kg | 9.63E-03 | 0* | 0* | 0* | 0* | 9.63E-03 |
| Exported Energy | MJ | 7.32E+00 | 6.88E-01 | 0* | 6.63E+00 | 0* | 0* |

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

 Registration number
 ENVPEP2107011_V1
 Drafting rules
 PCR-ed3-EN-2015 04 02

 Date of issue
 09/2021
 Supplemented by
 PSR-0005-ed2-EN-2016 03 29

 Validity period
 5 years
 Information and reference documents
 www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP2107011_V1 © 2019 - Schneider Electric – All rights reserved

09/2021