Product Environmental Profile

PS6000 Panel Type

Pro-face IPC








General information

Reference product	PS6000 Panel Type - PFXP67ADEF30AE7N00					
Description of the product	Robust as a terminal, Open and High-performance HMI leading industrial PC with multi touch screen					
	Box PCs, Panel PCs, Rack PCs and Monitors					
Description of the range	The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.					
Functional unit	PS6000 Series offer an Industrial design, operating within a 0-55°C temperature range for 10 years and consuming 153W in active mode, based on below function: - 19-inch Wide Touchscreen panel. - USB3.0 Interface (Tyepe-A) - COM Port (RS232/422/485) - Ethernet Interface (10/100/1000 Mbit/s)					

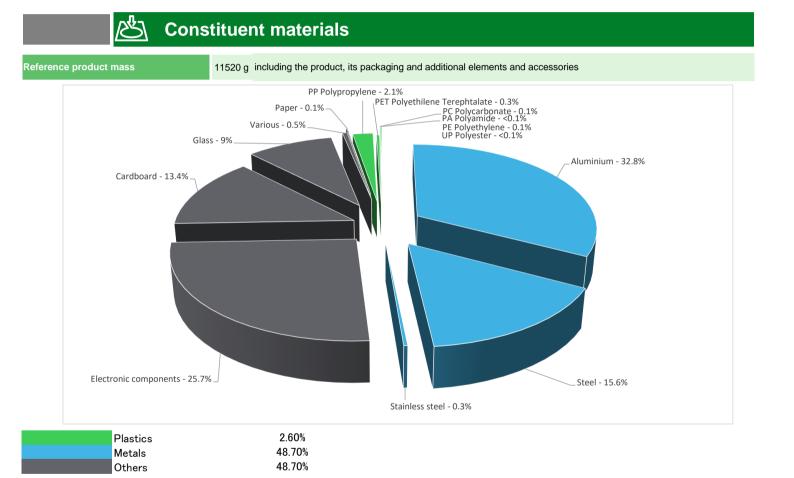

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/

End Of Life Recyclability potential: 55% Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

\mathcal{O} Environmental impacts

Reference service life time	10 years						
Product category	Other equipments - Active product						
Installation elements	cable, connectors, screws						
Use scenario	The product is in active mode 100% of the time a power use of 153W, for 10 years.						
Technological representativeness	Robust as a terminal, Open and High-performance HMI leading industrial PC with multi touch screen						
Geographical representativeness	Europe, US, Asia						
	[A1 - A3]	[A5]	[B6]	[C1 - C4]			
Energy model used	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN			

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Mandatory Indicators				PS6000 Panel T	ype - PFXP67AD	EF30AE7N00		
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Loads and Benefits
	onit	Total	[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	7.31E+03	6.06E+02	1.51E+00	2.75E+00	6.69E+03	1.09E+01	-6.19E+01
Contribution to climate change-fossil	kg CO2 eq	7.31E+03	6.03E+02	1.51E+00	2.63E+00	6.69E+03	1.09E+01	-6.03E+01
Contribution to climate change-biogenic	kg CO2 eq	6.29E+00	2.28E+00	0*	1.22E-01	3.89E+00	0*	-1.63E+00
Contribution to climate change-land use and land use chang	e kg CO2 eq	7.17E-06	7.17E-06	0*	0*	0*	0*	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	3.99E-04	3.61E-04	0*	1.82E-07	3.73E-05	2.14E-07	-8.09E-06
Contribution to acidification	mol H+ eq	4.74E+01	3.10E+00	9.69E-03	1.09E-02	4.43E+01	2.72E-02	-3.89E-01
Contribution to eutrophication, freshwater	kg (PO4)³⁻ eq	1.96E-02	9.76E-04	0*	1.99E-05	1.86E-02	2.31E-05	-2.38E-04
Contribution to eutrophication marine	kg N eq	5.73E+00	7.74E-01	4.55E-03	2.90E-03	4.94E+00	6.64E-03	-3.59E-02
Contribution to eutrophication, terrestrial	mol N eq	6.57E+01	8.27E+00	4.99E-02	2.19E-02	5.73E+01	6.23E-02	-3.86E-01
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.93E+01	2.93E+00	1.26E-02	5.84E-03	1.64E+01	2.11E-02	-1.27E-01
Contribution to resource use, minerals and metals	kg Sb eq	3.17E-02	3.14E-02	0*	0*	2.88E-04	0*	-2.14E-03
Contribution to resource use, fossils	MJ	1.81E+05	8.01E+03	2.10E+01	2.87E+01	1.72E+05	4.08E+02	-8.63E+02
Contribution to water use	m3 eq	4.11E+02	1.24E+02	0*	1.18E+00	2.84E+02	2.11E+00	-1.45E+01

Additional indicators for the French regulation are available as well

Inventory flows Indicators				PS6000 Panel Type - PFXP67ADEF30AE7N00					
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Loads and Benefits	
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]	
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.86E+04	1.10E+02	0*	2.06E+00	1.85E+04	0*	-1.72E+01	
Contribution to use of renewable primary energy resources used as raw material	MJ	3.01E+01	3.01E+01	0*	0*	0*	0*	-2.72E+01	
Contribution to total use of renewable primary energy resources	MJ	1.86E+04	1.40E+02	0*	2.06E+00	1.85E+04	0*	-4.44E+01	
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.81E+05	7.96E+03	2.10E+01	2.87E+01	1.72E+05	4.08E+02	-8.63E+02	
Contribution to use of non renewable primary energy resources used as raw material	MJ	4.55E+01	4.55E+01	0*	0*	0*	0*	0.00E+00	
Contribution to total use of non-renewable primary energy resources	MJ	1.81E+05	8.01E+03	2.10E+01	2.87E+01	1.72E+05	4.08E+02	-8.63E+02	
Contribution to use of secondary material	kg	7.50E-05	7.50E-05	0*	0*	0*	0*	0.00E+00	
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to net use of freshwater	m³	9.57E+00	2.89E+00	0*	2.74E-02	6.60E+00	4.91E-02	-3.37E-01	
Contribution to hazardous waste disposed	kg	8.90E+02	7.02E+02	0*	0*	1.73E+02	1.50E+01	-1.72E+02	
Contribution to non hazardous waste disposed	kg	1.28E+03	1.87E+02	0*	8.96E+00	1.08E+03	6.88E-01	-1.31E+02	
Contribution to radioactive waste disposed	kg	2.84E-01	1.75E-01	3.76E-05	1.20E-03	1.08E-01	1.32E-04	-7.25E-02	
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to materials for recycling	kg	6.89E+00	8.78E-03	0*	1.51E+00	0*	5.37E+00	0.00E+00	
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	

represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2310005_V1	Drafting rules	PEP-PCR-ed4-2021 09 06					
Verifier accreditation N°	0	Supplemented by	PSR-0005-ed2-2016 03 29					
Date of issue	2023/10/18	Information and reference documents	www.pep-ecopassport.org					
		Validity period	5 years					
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016								
Internal X External								
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)								
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019								
The elements of the present PEP cannot be compared with elements from another program.								
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »								

Schneider Electric Industries SAS

Country Customer Care Center http://www.se.com/contact

35, rue Joseph Monier CS 30323 F- 92500 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 928 298 512 €

www.se.com

0

Published by Schneider Electric ©2023 - Schneider Electric – All rights reserved

2023/10/18